



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**BELL B30E B93A631EC03010095**  
 Component  
**Wet Disc Brake**  
 Fluid  
**{not provided} (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>BE0009668</b>	---	---
Sample Date		Client Info		<b>23 May 2024</b>	---	---
Machine Age	hrs	Client Info		<b>2025</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>Changed</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

## WEAR

All component wear rates are normal.

PQ		ASTM D8184		<b>16</b>	---	---
Iron	ppm	ASTM D5185m	>20	<b>26</b>	---	---
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>10	<b>5</b>	---	---
Lead	ppm	ASTM D5185m	>10	<b>11</b>	---	---
Copper	ppm	ASTM D5185m	>75	<b>0</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

## CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	<b>18</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	---	---
Water		WC Method	>0.1	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	---	---

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>12</b>	---	---
Boron	ppm	ASTM D5185m		<b>203</b>	---	---
Barium	ppm	ASTM D5185m		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>3</b>	---	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>5</b>	---	---
Calcium	ppm	ASTM D5185m		<b>1271</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>738</b>	---	---
Zinc	ppm	ASTM D5185m		<b>525</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>7061</b>	---	---
Visc @ 40°C	cSt	ASTM D445		<b>35.5</b>	---	---

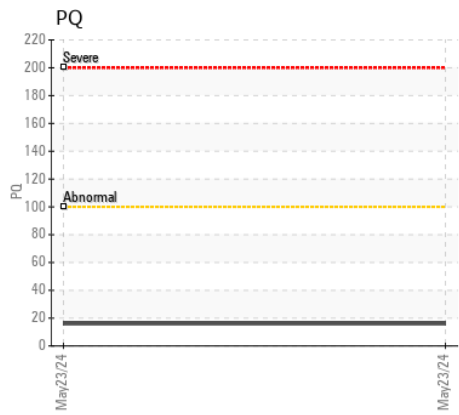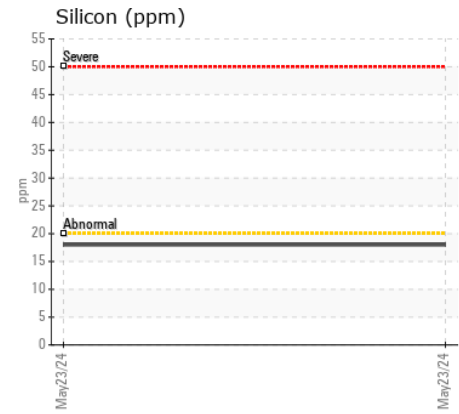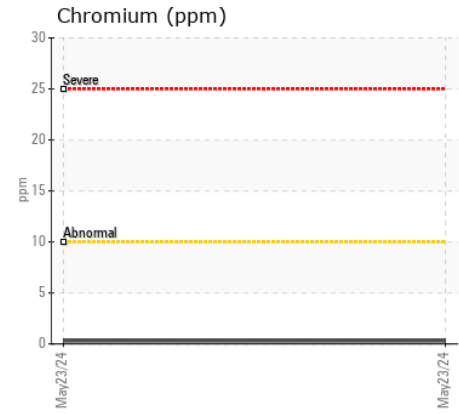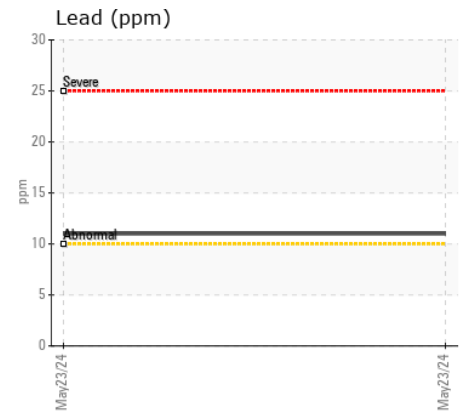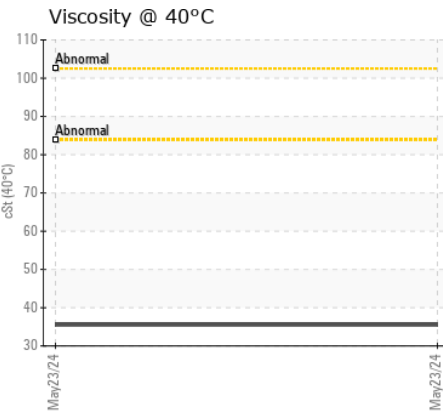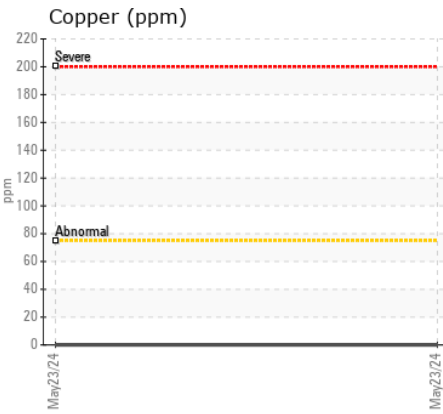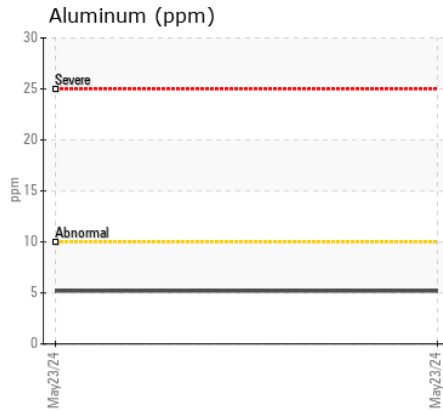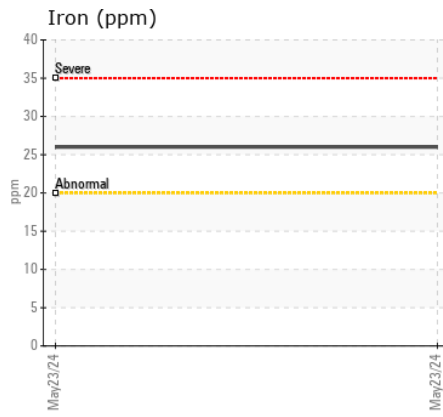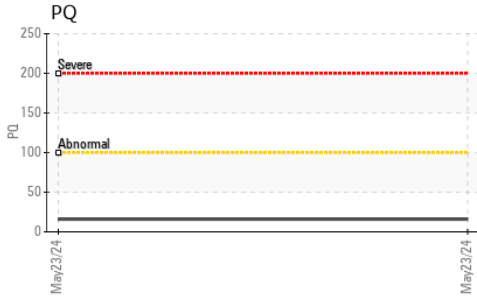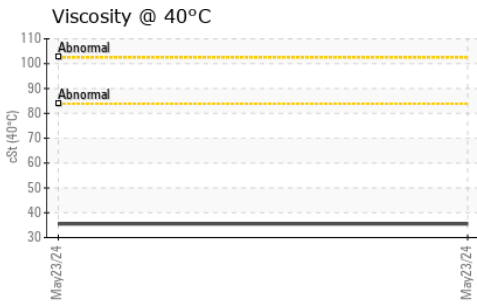

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : BE0009668  
 Lab Number : 06197048  
 Unique Number : 11059171  
 Test Package : MOBCE

Received : 31 May 2024  
 Tested : 03 Jun 2024  
 Diagnosed : 04 Jun 2024 - Don Baldrige

**National Equipment Dealers LLC NE**  
 215 Woodside Drive  
 Lexington, NC  
 US 27292  
 Contact: Steven Gawthrop  
 sgawthrop@nedealers.com  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)