



# OIL ANALYSIS REPORT

WEAR	<b>ABNORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**JOHN DEERE 624K 624K-1 (S/N PJBD640297)**  
Component  
**Rear Differential**  
Fluid  
**TDH FLUID SAE 75W80 (--- GAL)**

## RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC06197070	---	---
Sample Date		Client Info		21 May 2024	---	---
Machine Age	hrs	Client Info		11702	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ABNORMAL	---	---

## WEAR

Gear wear is indicated. All other component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	▲ 592	---	---
Chromium	ppm	ASTM D5185m	>10	2	---	---
Nickel	ppm	ASTM D5185m	>10	2	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	2	---	---
Lead	ppm	ASTM D5185m	>25	0	---	---
Copper	ppm	ASTM D5185m	>100	17	---	---
Tin	ppm	ASTM D5185m	>10	1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

## CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>75	40	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water		WC Method	>.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>.2	NEG	---	---

## FLUID CONDITION


The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	---	---
Boron	ppm	ASTM D5185m	10	8	---	---
Barium	ppm	ASTM D5185m	10	0	---	---
Molybdenum	ppm	ASTM D5185m	10	<1	---	---
Manganese	ppm	ASTM D5185m		5	---	---
Magnesium	ppm	ASTM D5185m	100	90	---	---
Calcium	ppm	ASTM D5185m	3500	3018	---	---
Phosphorus	ppm	ASTM D5185m	1150	1383	---	---
Zinc	ppm	ASTM D5185m	1150	958	---	---
Sulfur	ppm	ASTM D5185m	5000	3798	---	---
Visc @ 40°C	cSt	ASTM D445	48	46.3	---	---


▲ Ferrous Alloys

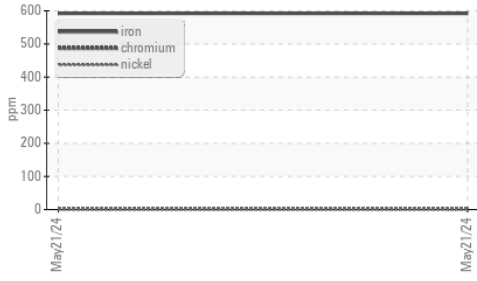


Viscosity @ 40°C

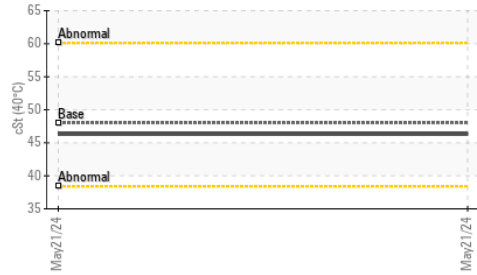


▲ Iron (ppm)

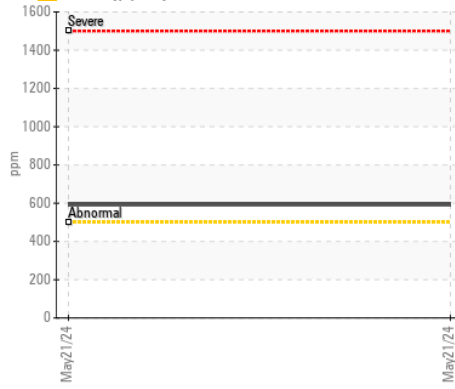


Aluminum (ppm)

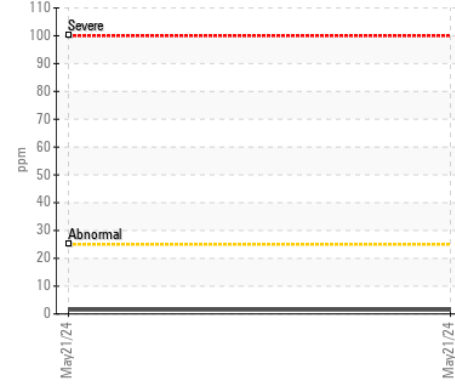


Copper (ppm)

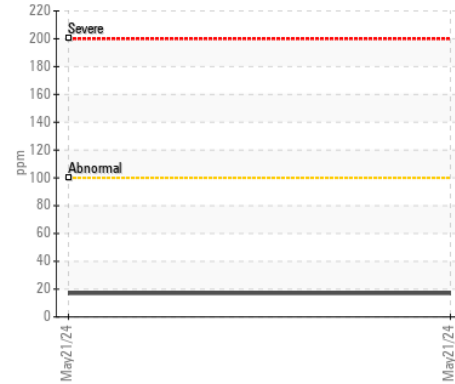


Viscosity @ 40°C

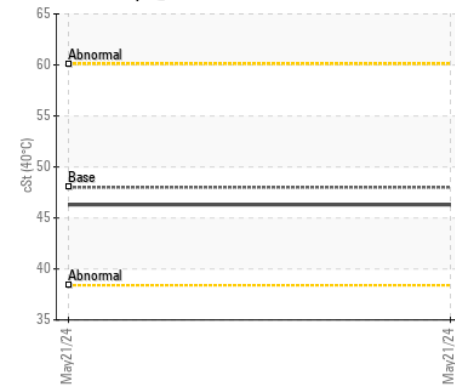


Lead (ppm)

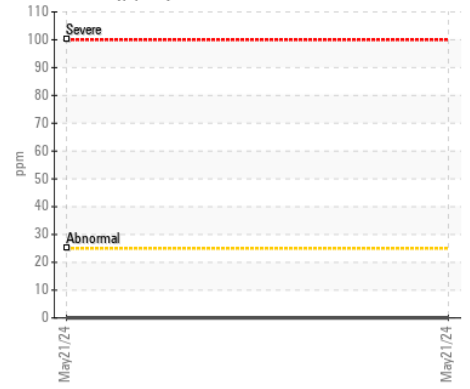


Chromium (ppm)

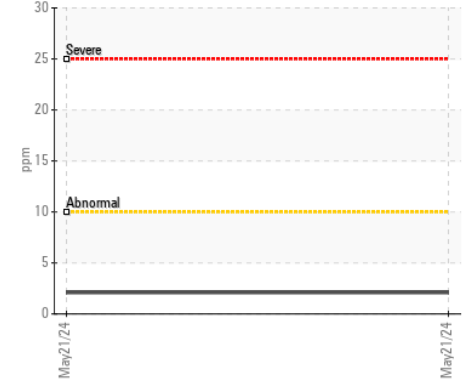

Silicon (ppm)

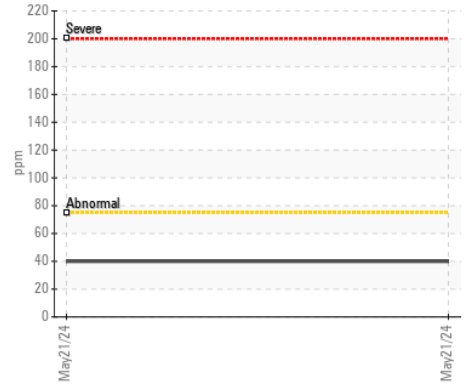

Additives

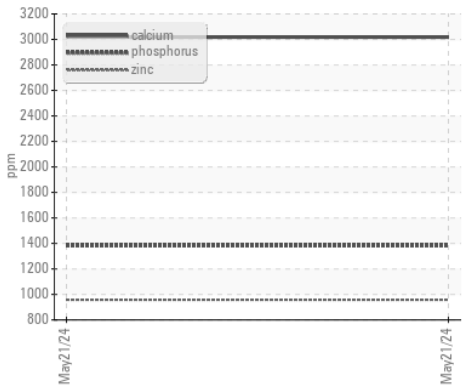

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC06197070

Lab Number : 06197070

Unique Number : 11059193

Test Package : MOB 1

Received : 31 May 2024

Tested : 03 Jun 2024

Diagnosed : 04 Jun 2024 - Don Baldrige

GAINES & CO.

112 WESTMINSTER RD.

REISTERSTOWN, MD

US 21136

Contact: MIKE GLADFELTER

mgladfelter@gainessandco.com

T: (410)833-9833

F: (410)833-9822

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)