



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR L566 014293-460
Component
Rear Differential
Fluid
GEAR OIL SAE 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0264550	LHMC012365	---
Sample Date		Client Info		24 May 2024	23 Mar 2007	---
Machine Age	hrs	Client Info		33900	1022	---
Oil Age	hrs	Client Info		0	1022	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Changed	Changed	---
Filter Changed		Client Info		Not Changed	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>800	260	123	---
Chromium	ppm	ASTM D5185m	>10	1	2	---
Nickel	ppm	ASTM D5185m	>4	0	<1	---
Titanium	ppm	ASTM D5185m	>8	0	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>20	0	<1	---
Lead	ppm	ASTM D5185m	>10	0	0	---
Copper	ppm	ASTM D5185m	>100	1	5	---
Tin	ppm	ASTM D5185m	>5	0	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	4	9	---
Potassium	ppm	ASTM D5185m	>20	<1	0	---
Water		WC Method	>.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	LIGHT	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>170	1	3	---
Boron	ppm	ASTM D5185m	400	43	5	---
Barium	ppm	ASTM D5185m	200	0	3	---
Molybdenum	ppm	ASTM D5185m	12	9	18	---
Manganese	ppm	ASTM D5185m		2	4	---
Magnesium	ppm	ASTM D5185m	12	6	0	---
Calcium	ppm	ASTM D5185m	150	33	5	---
Phosphorus	ppm	ASTM D5185m	1650	2159	1959	---
Zinc	ppm	ASTM D5185m	125	11	4	---
Sulfur	ppm	ASTM D5185m	22500	29652	28700	---
Visc @ 40°C	cSt	ASTM D445	143	177	187.9	---

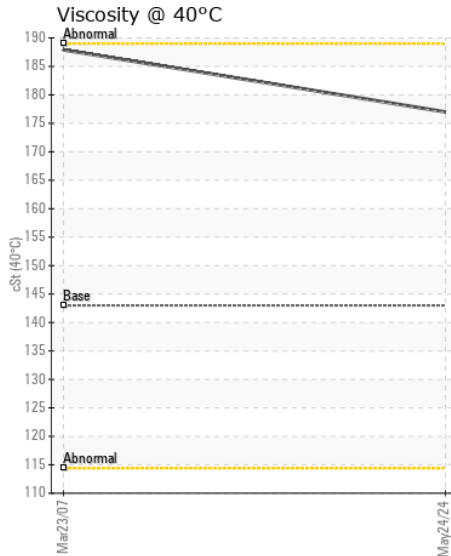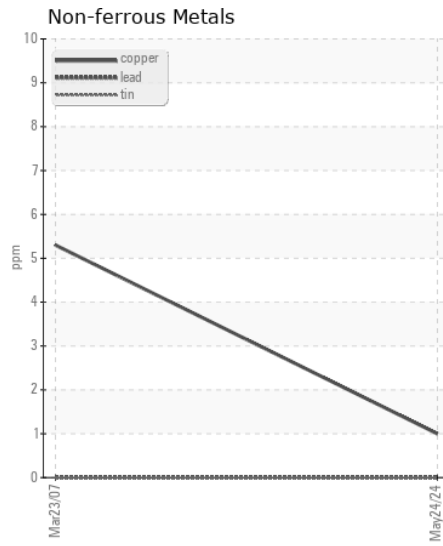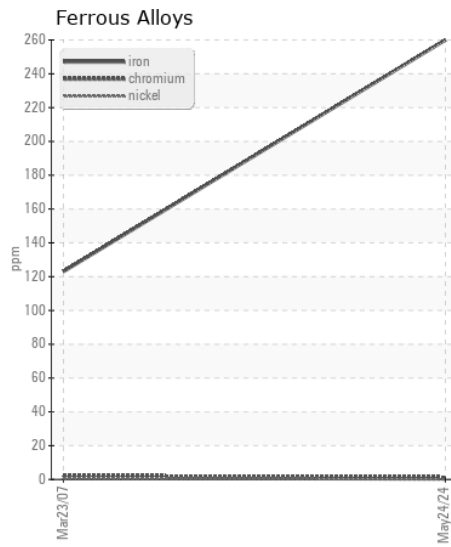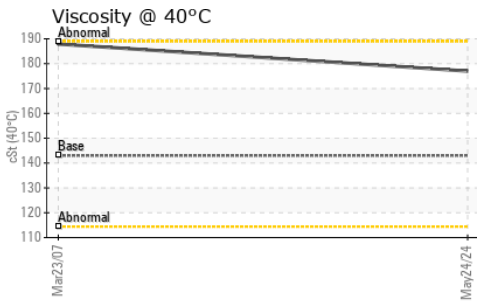

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LH0264550
Lab Number : 06197085
Unique Number : 11059208
Test Package : CONST

Received : 31 May 2024
Tested : 03 Jun 2024
Diagnosed : 03 Jun 2024 - Wes Davis

DOMTAR PULP AND PAPER
 301 POINT BASSE AVE
 NEKOOSA, WI
 US 54457

Contact: MARK SNYDER
 mark.snyder@domtar.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (715)675-6900
 F: (715)675-9748