



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO L90H 625992
Component
Front Axle
Fluid
VOLVO WB 102 (10 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ML0001319	VCP423083	VCP341198
Sample Date		Client Info		28 May 2024	27 Jun 2023	13 Oct 2022
Machine Age	hrs	Client Info		4027	2281	1256
Oil Age	hrs	Client Info		4027	0	0
Filter Age	hrs	Client Info		4027	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Not Changed	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	46	30	73
Chromium	ppm	ASTM D5185m	>20	<1	1	3
Nickel	ppm	ASTM D5185m	>10	0	0	<1
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>30	<1	1	0
Lead	ppm	ASTM D5185m	>50	0	0	<1
Copper	ppm	ASTM D5185m	>120	0	0	<1
Tin	ppm	ASTM D5185m	>20	0	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	14	14	12
Potassium	ppm	ASTM D5185m	>20	0	0	0
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	MODER
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	1	9
Boron	ppm	ASTM D5185m		100	139	130
Barium	ppm	ASTM D5185m		0	0	2
Molybdenum	ppm	ASTM D5185m		3	2	8
Manganese	ppm	ASTM D5185m		3	2	11
Magnesium	ppm	ASTM D5185m		56	15	18
Calcium	ppm	ASTM D5185m		3273	4026	3956
Phosphorus	ppm	ASTM D5185m		1186	1319	1291
Zinc	ppm	ASTM D5185m		1405	1670	1649
Sulfur	ppm	ASTM D5185m		4144	5202	4370
Visc @ 40°C	cSt	ASTM D445	55	42.2	41.8	40.4

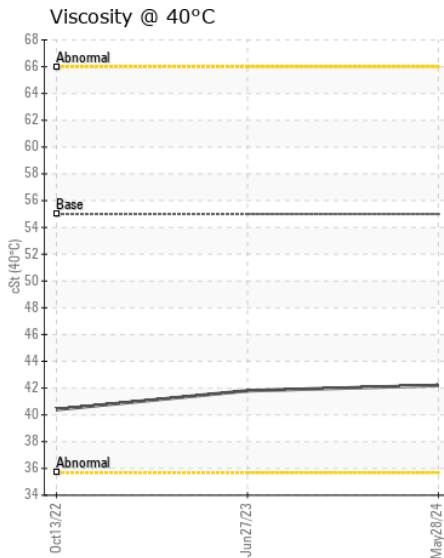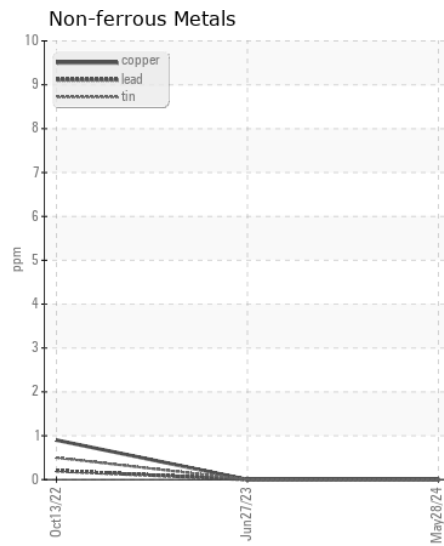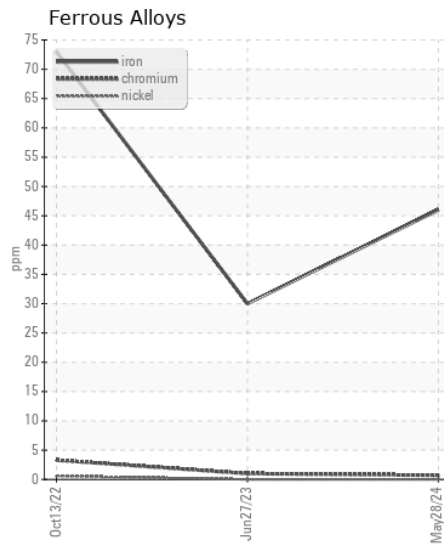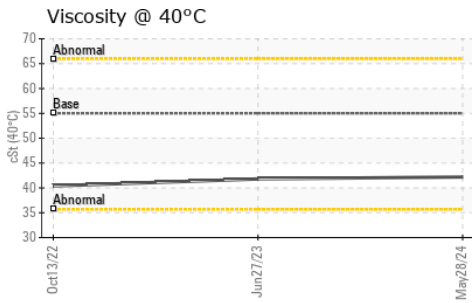

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ML0001319
Lab Number : 06197105
Unique Number : 11059228
Test Package : CONST

Received : 31 May 2024
Tested : 03 Jun 2024
Diagnosed : 04 Jun 2024 - Don Baldrige

MCCLUNG-LOGAN EQUIPMENT CO - BALTIMORE
 4601 WASHINGTON BOULEVARD
 BALTIMORE, MD
 US 21227

Contact: MARK CIULLA
 mciulla@mcclung-logan.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (410)242-6500
 F: (410)242-7835