



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**AMR-Cheyenne**  
 Machine Id  
**693245 LIEBHERR LH60M 156876**  
 Component  
**Front Left Final Drive**  
 Fluid  
**LIEBHERR GEAR BASIC 90 LS (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>DJJ0020061</b>	---	---
Sample Date		Client Info		<b>28 May 2024</b>	---	---
Machine Age	hrs	Client Info		<b>655</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>350	<b>63</b>	---	---
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Lead	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m	>125	<b>12</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---

## CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>45	<b>2</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	---	---

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>3</b>	---	---
Boron	ppm	ASTM D5185m	0	<b>9</b>	---	---
Barium	ppm	ASTM D5185m	0	<b>319</b>	---	---
Molybdenum	ppm	ASTM D5185m	0	<b>0</b>	---	---
Manganese	ppm	ASTM D5185m	0	<b>2</b>	---	---
Magnesium	ppm	ASTM D5185m	<1	<b>&lt;1</b>	---	---
Calcium	ppm	ASTM D5185m	<1	<b>15</b>	---	---
Phosphorus	ppm	ASTM D5185m	2143	<b>1310</b>	---	---
Zinc	ppm	ASTM D5185m	<1	<b>26</b>	---	---
Sulfur	ppm	ASTM D5185m	23468	<b>32060</b>	---	---
Visc @ 40°C	cSt	ASTM D445	170	<b>193</b>	---	---

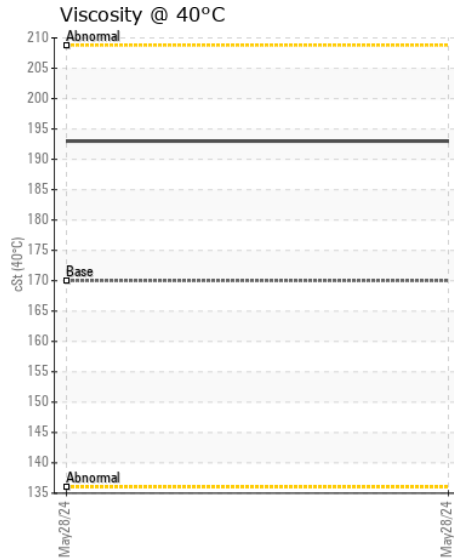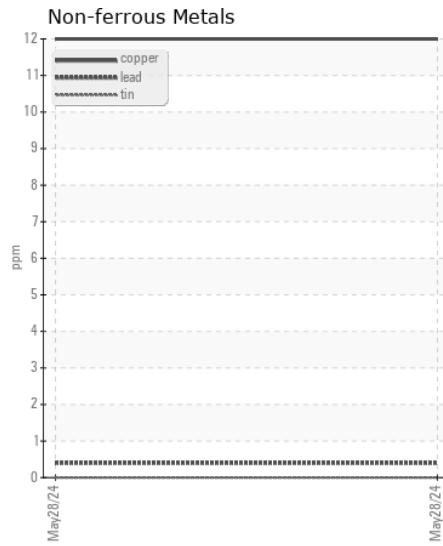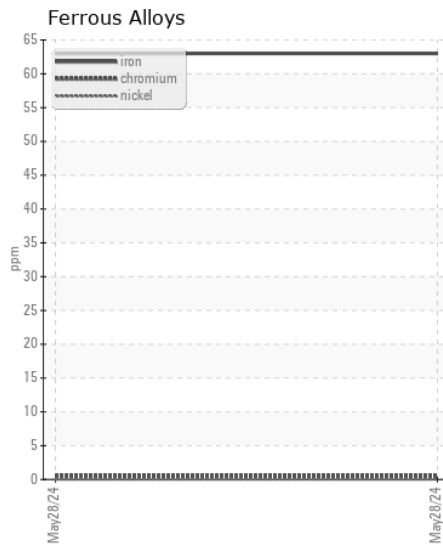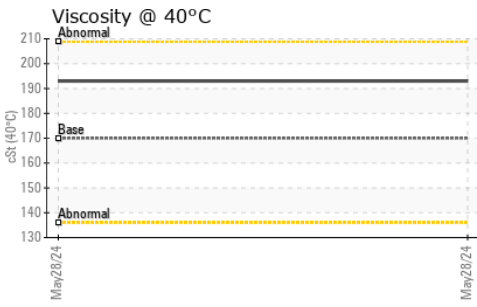

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : DJJ0020061  
**Lab Number** : 06197141  
**Unique Number** : 11059264  
**Test Package** : CONST

**Received** : 31 May 2024  
**Tested** : 03 Jun 2024  
**Diagnosed** : 04 Jun 2024 - Don Baldrige

**ADVANTAGE METALS RECYCLING - CHEYENNE**  
 1015 S. PACKARD ST  
 KANSAS CITY, KS  
 US 66105  
 Contact: BRIAN JACOBS  
 BRIAN.JACOBS@ADVANTAGERECYCLING.COM  
 T: (816)808-4711  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)