



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**INTERNATIONAL 1562**

Component  
**Diesel Engine**

Fluid  
**DIESEL ENGINE OIL SAE 10W30 (48 QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0802023</b>	WC0886834	WC0852711
Sample Date		Client Info		<b>24 May 2024</b>	15 Mar 2024	17 Nov 2023
Machine Age	mls	Client Info		<b>688709</b>	661149	21378
Oil Age	mls	Client Info		<b>1012</b>	25684	21378
Filter Age	mls	Client Info		<b>1012</b>	25684	21378
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>90	<b>43</b>	69	33
Chromium	ppm	ASTM D5185m	>20	<b>3</b>	7	1
Nickel	ppm	ASTM D5185m	>2	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m	>2	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>3</b>	4	4
Lead	ppm	ASTM D5185m	>40	<b>2</b>	6	3
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	2	1
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>LIGHT</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>4</b>	6	5
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	5	5
Fuel		WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>6	<b>0.3</b>	0.3	0.3
Nitration	Abs/cm	*ASTM D7624	>20	<b>10.9</b>	11.4	10.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>24.1</b>	24.8	23.0
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>1</b>	3	2
Boron	ppm	ASTM D5185m	250	<b>2</b>	9	5
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>60</b>	64	48
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	1	<1
Magnesium	ppm	ASTM D5185m	450	<b>908</b>	981	670
Calcium	ppm	ASTM D5185m	3000	<b>1084</b>	1172	1467
Phosphorus	ppm	ASTM D5185m	1150	<b>1017</b>	1080	971
Zinc	ppm	ASTM D5185m	1350	<b>1228</b>	1349	1218
Sulfur	ppm	ASTM D5185m	4250	<b>3088</b>	3410	3059
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>22.4</b>	23.9	19.0
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>5.1</b>	4.9	6.0
Visc @ 100°C	cSt	ASTM D445	10.9	<b>11.2</b>	11.2	11.8

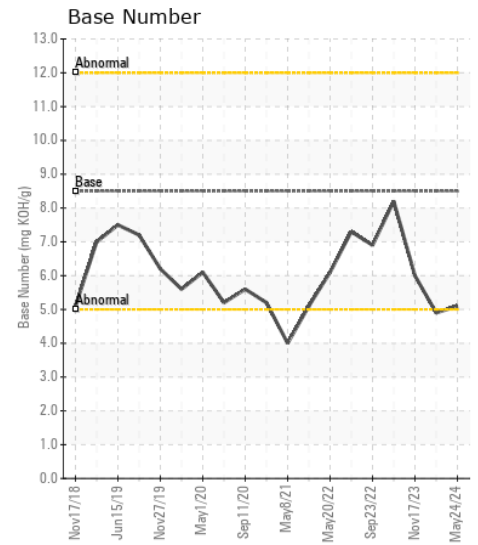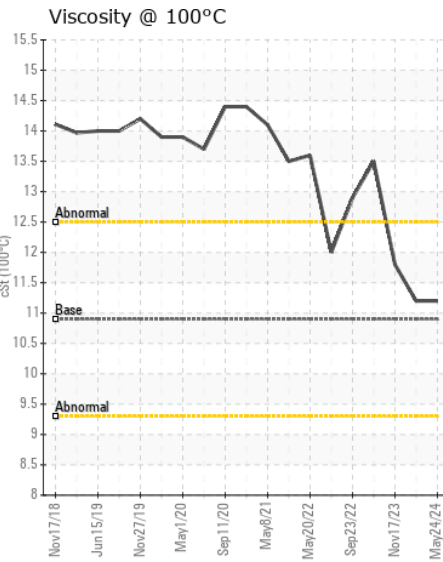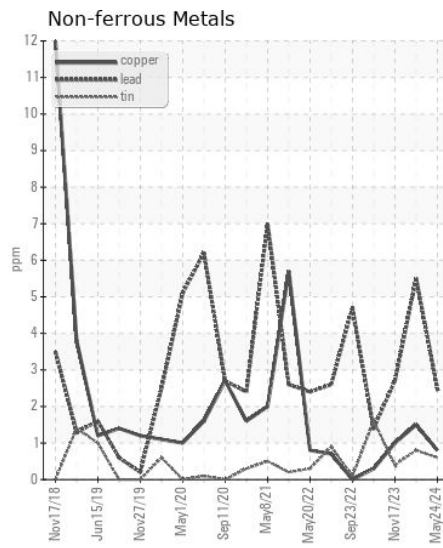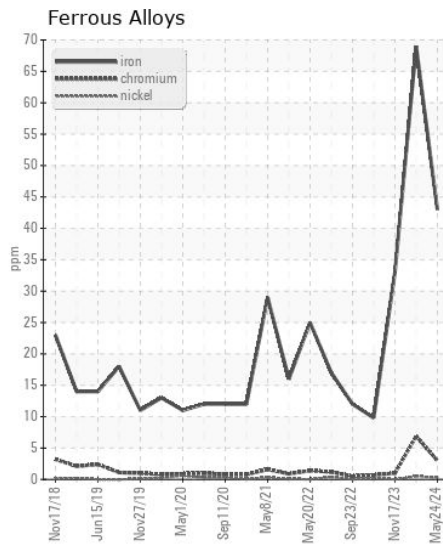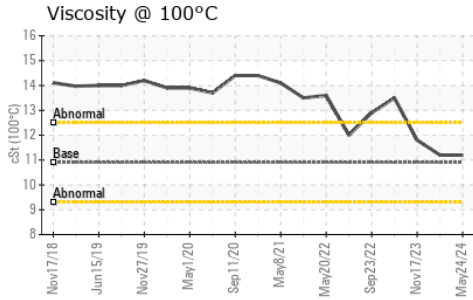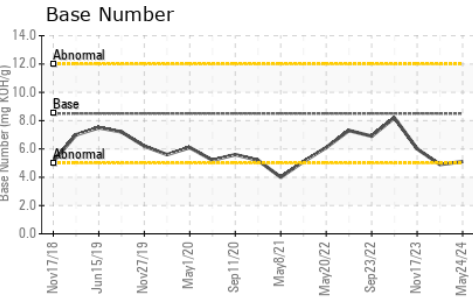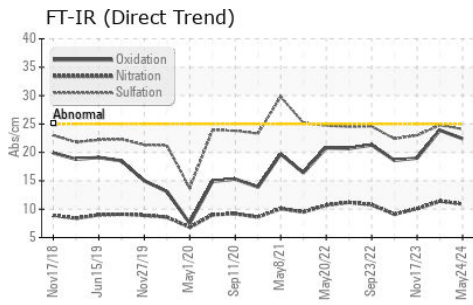

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0802023  
**Lab Number** : 06197371  
**Unique Number** : 11059494  
**Test Package** : FLEET

**Received** : 03 Jun 2024  
**Tested** : 04 Jun 2024  
**Diagnosed** : 04 Jun 2024 - Wes Davis

**CARCO TRANSPORTATION**  
 2801 MIDLAND BLVD.  
 FORT SMITH, AR  
 US 72904  
 Contact: RON BALL  
 rball@carcotrans.com  
 T: (479)441-3228  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)