



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 450K 1T0450KXTPF437738
 Component
Diesel Engine
 Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0212729	JR0186311	---
Sample Date		Client Info		29 May 2024	29 Aug 2023	---
Machine Age	hrs	Client Info		984	506	---
Oil Age	hrs	Client Info		478	506	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	ABNORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	23	25	---
Chromium	ppm	ASTM D5185m	>11	1	<1	---
Nickel	ppm	ASTM D5185m	>5	<1	0	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>31	8	7	---
Lead	ppm	ASTM D5185m	>26	11	8	---
Copper	ppm	ASTM D5185m	>26	23	▲ 105	---
Tin	ppm	ASTM D5185m	>4	2	2	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION









There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	9	8	---
Potassium	ppm	ASTM D5185m	>20	4	3	---
Fuel	%	ASTM D3524	>2.1	<1.0	1.0	---
Water		WC Method	>0.21	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.3	0.3	---
Nitration	Abs/cm	*ASTM D7624	>20	9.4	9.4	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.1	21.4	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	3	4	---
Boron	ppm	ASTM D5185m		283	183	---
Barium	ppm	ASTM D5185m		1	1	---
Molybdenum	ppm	ASTM D5185m		344	232	---
Manganese	ppm	ASTM D5185m		1	5	---
Magnesium	ppm	ASTM D5185m		1049	849	---
Calcium	ppm	ASTM D5185m		1999	1488	---
Phosphorus	ppm	ASTM D5185m		1304	869	---
Zinc	ppm	ASTM D5185m		1544	1110	---
Sulfur	ppm	ASTM D5185m		4819	3540	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.5	16.7	---
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	8.1	8.1	---
Visc @ 100°C	cSt	ASTM D445	15.4	12.8	● 10.8	---

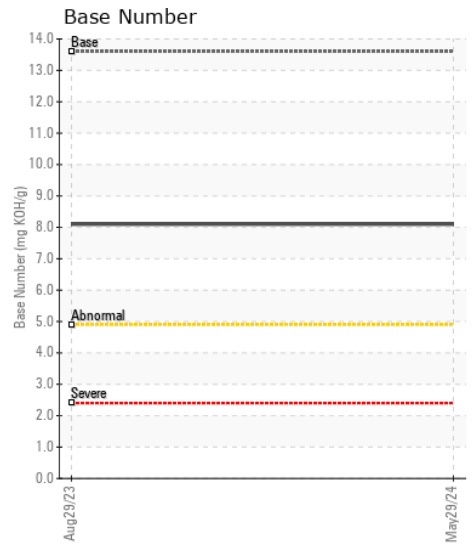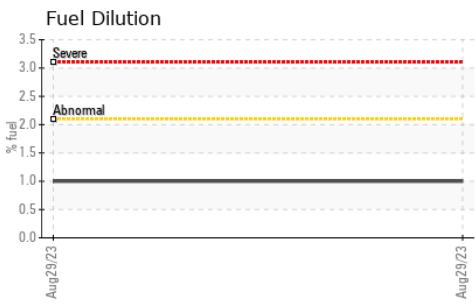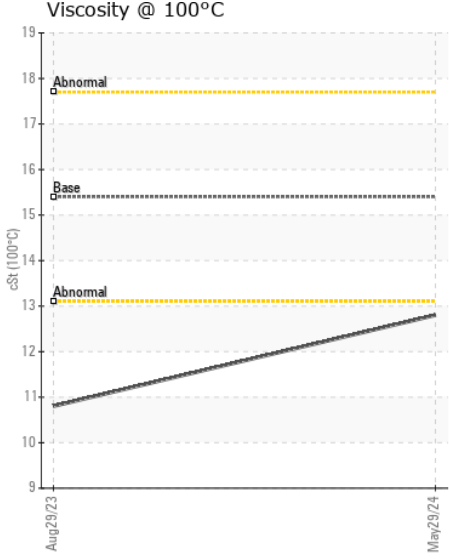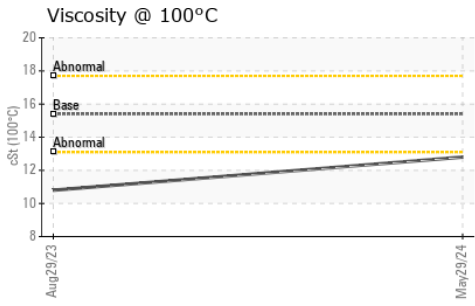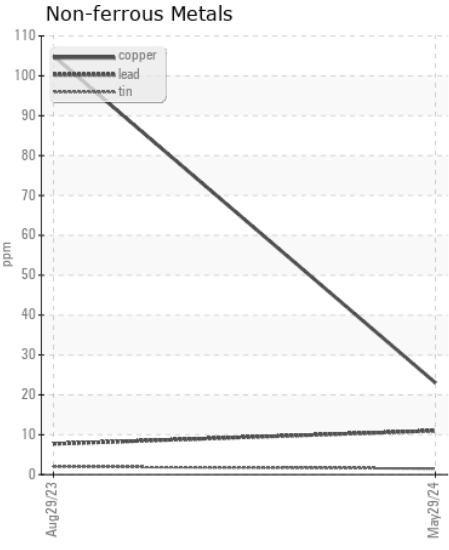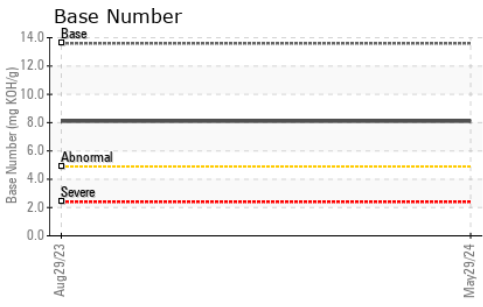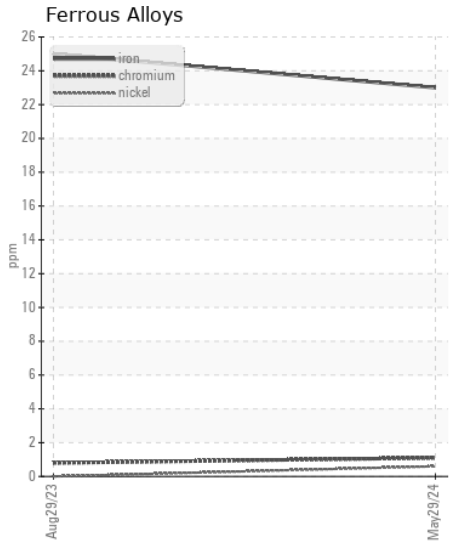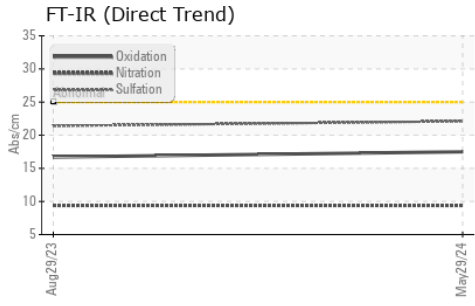

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0212729 **Received** : 03 Jun 2024
Lab Number : 06197462 **Tested** : 04 Jun 2024
Unique Number : 11059585 **Diagnosed** : 04 Jun 2024 - Don Baldrige
Test Package : CONST (Additional Tests: FuelDilution, TBN)

JRE - GARNER
 4161 AUBURN CHURCH RD
 GARNER, NC
 US 27529
 Contact: RALEIGH SHOP
 sean.betts@jamesriverequipment.com; catherine.anastasio@wearcheck.com
 T: (919)614-2260
 F: (919)779-5432

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)