



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**JOHN DEERE 700k 1T0700KXTJF334967**  
 Component  
**Hydraulic System**  
 Fluid  
**{not provided} (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0213092</b>	JR0178408	---
Sample Date		Client Info		<b>02 Jun 2024</b>	23 Aug 2023	---
Machine Age	hrs	Client Info		<b>3459</b>	3227	---
Oil Age	hrs	Client Info		<b>0</b>	3227	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>N/A</b>	Changed	---
Filter Changed		Client Info		<b>N/A</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

### WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	<b>14</b>	14	---
Iron	ppm	ASTM D5185m	>23	<b>0</b>	4	---
Chromium	ppm	ASTM D5185m	>9	<b>3</b>	7	---
Nickel	ppm	ASTM D5185m	>5	<b>0</b>	0	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	2	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>9	<b>&lt;1</b>	0	---
Lead	ppm	ASTM D5185m	>28	<b>0</b>	2	---
Copper	ppm	ASTM D5185m	>51	<b>13</b>	31	---
Tin	ppm	ASTM D5185m	>5	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION











The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>31	<b>0</b>	6	---
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	3	---
Water		WC Method	>0.075	<b>NEG</b>	NEG	---
Particles >4µm		ASTM D7647	>80000	<b>3065</b>	75823	---
Particles >6µm		ASTM D7647	>20000	<b>620</b>	8786	---
Particles >14µm		ASTM D7647	>640	<b>41</b>	339	---
Particles >21µm		ASTM D7647	>160	<b>9</b>	114	---
Particles >38µm		ASTM D7647	>40	<b>0</b>	2	---
Particles >71µm		ASTM D7647	>10	<b>0</b>	0	---
Oil Cleanliness		ISO 4406 (c)	>23/21/16	<b>19/16/13</b>	23/20/16	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.075	<b>NEG</b>	NEG	---

### FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>21	<b>2</b>	0	---
Boron	ppm	ASTM D5185m		<b>7</b>	34	---
Barium	ppm	ASTM D5185m		<b>0</b>	2	---
Molybdenum	ppm	ASTM D5185m		<b>10</b>	17	---
Manganese	ppm	ASTM D5185m		<b>0</b>	0	---
Magnesium	ppm	ASTM D5185m		<b>44</b>	92	---
Calcium	ppm	ASTM D5185m		<b>548</b>	1364	---
Phosphorus	ppm	ASTM D5185m		<b>596</b>	414	---
Zinc	ppm	ASTM D5185m		<b>706</b>	497	---
Sulfur	ppm	ASTM D5185m		<b>2167</b>	2500	---
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.80</b>	0.63	---
Visc @ 40°C	cSt	ASTM D445		<b>56.6</b>	48.0	---

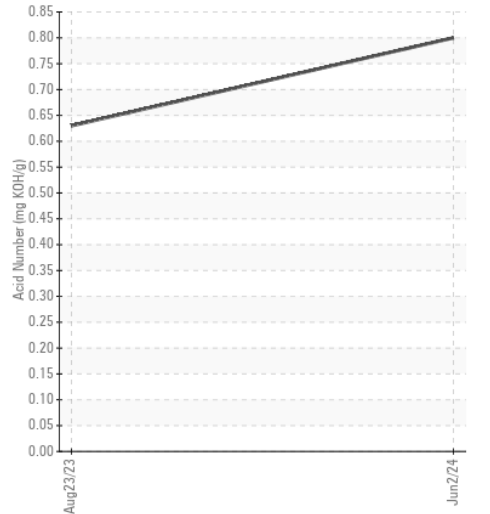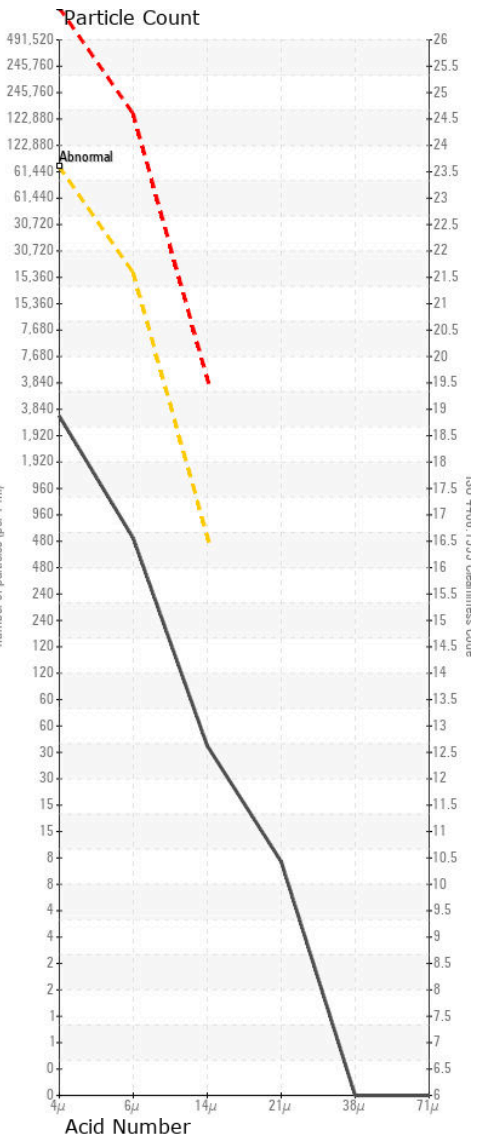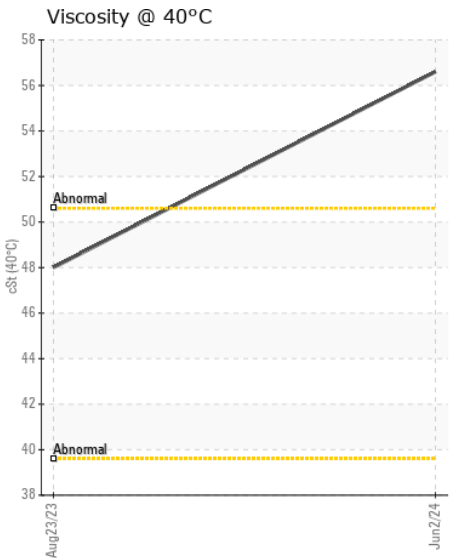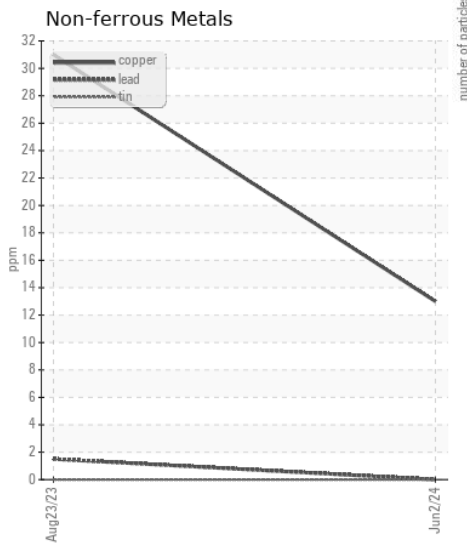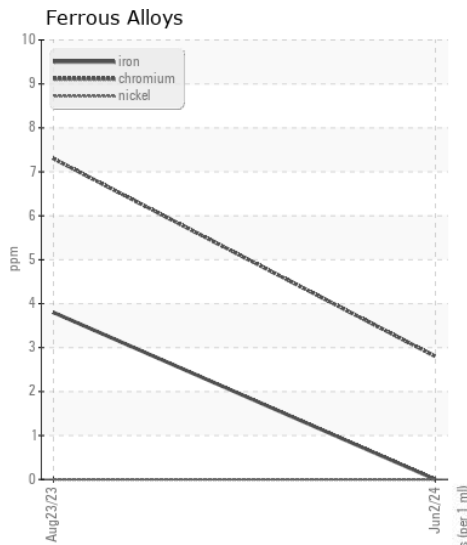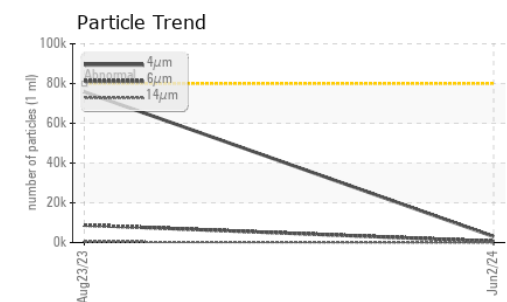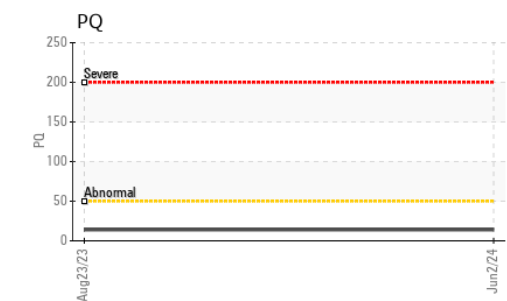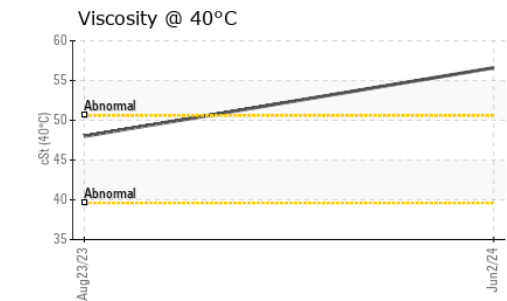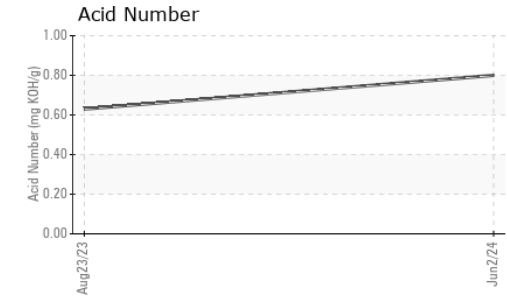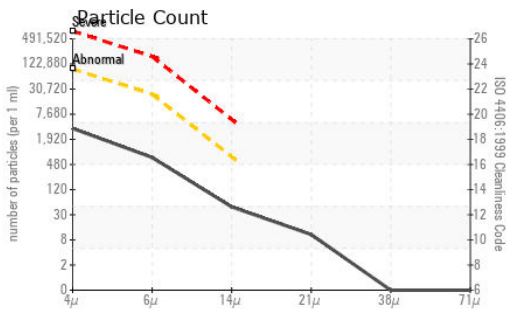

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0213092 **Received** : 03 Jun 2024  
**Lab Number** : 06197533 **Tested** : 04 Jun 2024  
**Unique Number** : 11059656 **Diagnosed** : 04 Jun 2024 - Don Baldrige  
**Test Package** : CONST ( Additional Tests: PQ )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**JRE - GREENSBORO**  
 411 SOUTH REGIONAL ROAD  
 GREENSBORO, NC  
 US 27409

Contact: NICK GALLAHER  
 NGALLAHER@JRENET.COM

T: (336)668-2762

F: (336)665-9556