



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[50279]

Machine Id

PR3 HPU TANK (S/N 002)

Component

Hydraulic System

Fluid

{not provided} (200 GAL)

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0938729	---	---
Sample Date		Client Info		21 May 2024	---	---
Machine Age	mths	Client Info		2	---	---
Oil Age	mths	Client Info		2	---	---
Filter Age	mths	Client Info		2	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				NORMAL	---	---

## WEAR

All component wear rates are normal.

PQ		ASTM D8184		16	---	---
Iron	ppm	ASTM D5185m	>20	0	---	---
Chromium	ppm	ASTM D5185m	>20	0	---	---
Nickel	ppm	ASTM D5185m	>20	0	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>20	0	---	---
Lead	ppm	ASTM D5185m	>20	0	---	---
Copper	ppm	ASTM D5185m	>20	17	---	---
Tin	ppm	ASTM D5185m	>20	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

## CONTAMINATION










The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>15	0	---	---
Potassium	ppm	ASTM D5185m	>20	0	---	---
Water	%	ASTM D6304	>0.05	0.005	---	---
ppm Water	ppm	ASTM D6304	>500	54	---	---
Particles >4µm		ASTM D7647	>5000	2442	---	---
Particles >6µm		ASTM D7647	>1300	489	---	---
Particles >14µm		ASTM D7647	>160	44	---	---
Particles >21µm		ASTM D7647	>40	12	---	---
Particles >38µm		ASTM D7647	>10	0	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	18/16/13	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.05	NEG	---	---

## FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		3	---	---
Boron	ppm	ASTM D5185m		0	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		0	---	---
Magnesium	ppm	ASTM D5185m		2	---	---
Calcium	ppm	ASTM D5185m		109	---	---
Phosphorus	ppm	ASTM D5185m		351	---	---
Zinc	ppm	ASTM D5185m		438	---	---
Sulfur	ppm	ASTM D5185m		1008	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		0.32	---	---
Visc @ 40°C	cSt	ASTM D445		76.4	---	---

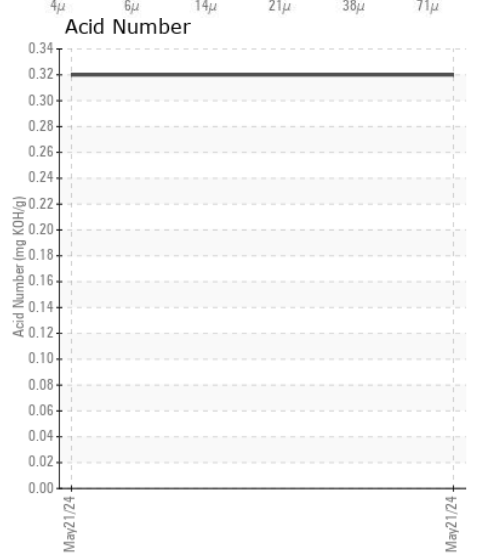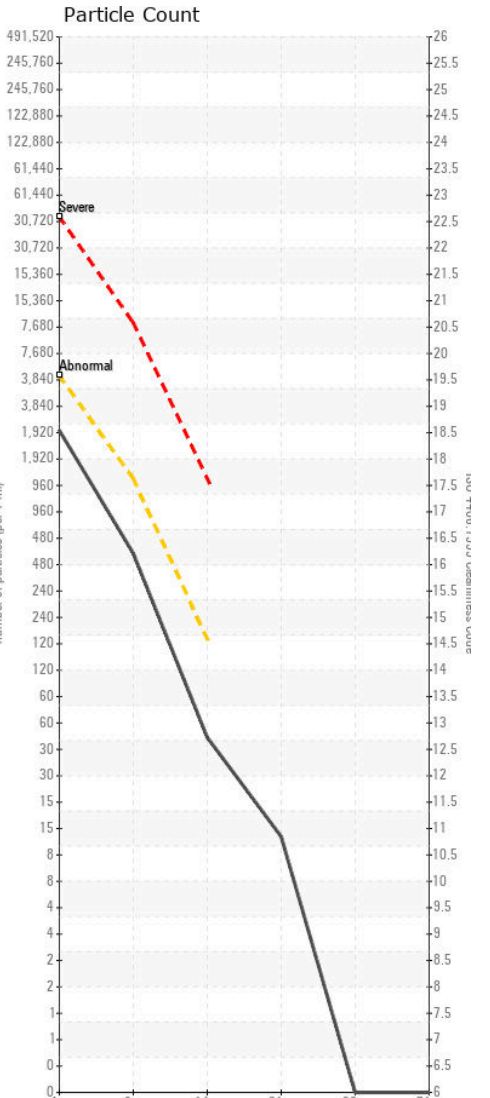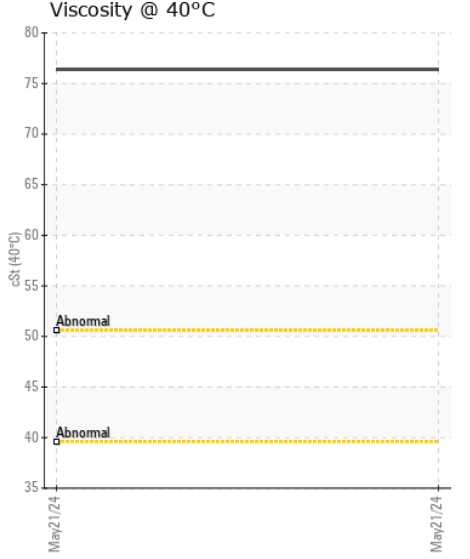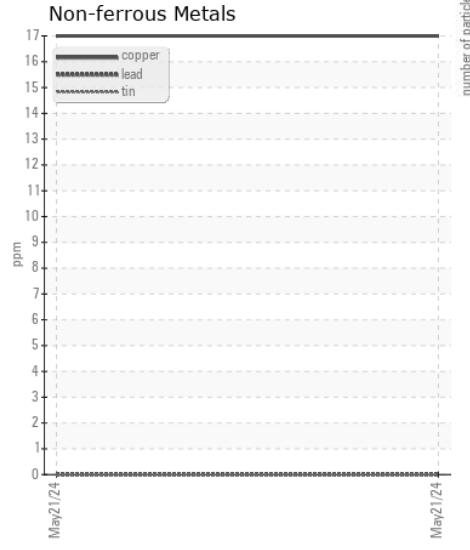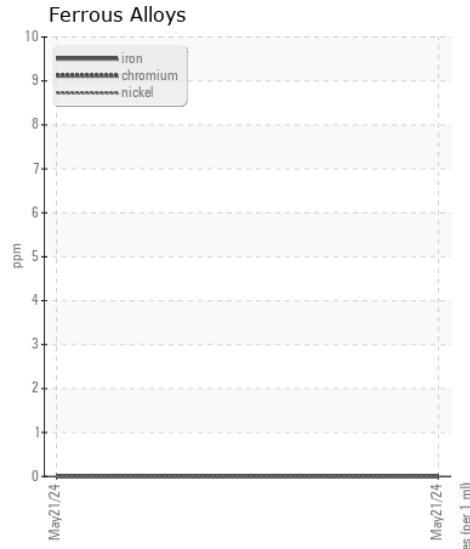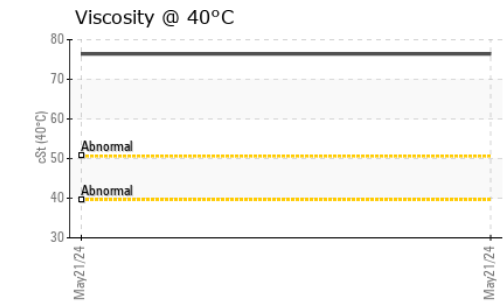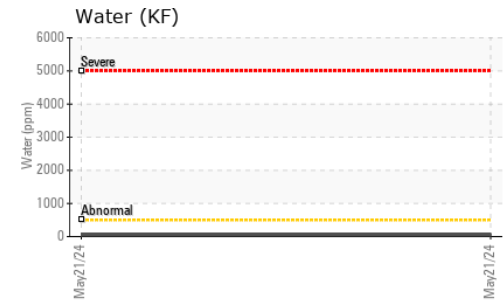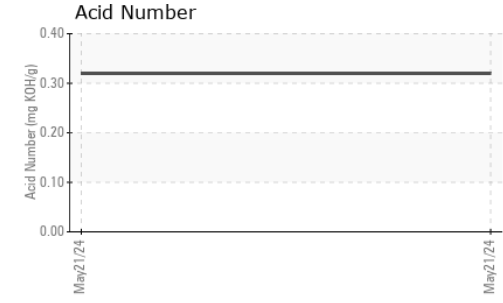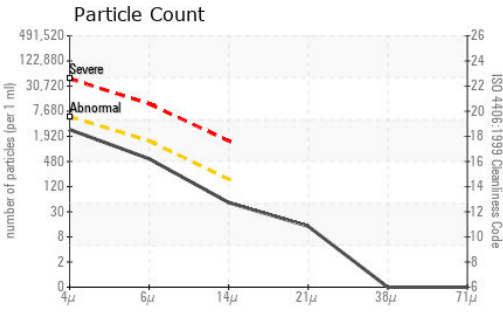

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0938729  
**Lab Number** : 06197629  
**Unique Number** : 11059752  
**Test Package** : PLANT  
**Received** : 03 Jun 2024  
**Tested** : 04 Jun 2024  
**Diagnosed** : 04 Jun 2024 - Don Baldrige

**THE BORING COMPANY**  
 130 WALKER-WATSON RD  
 BASTROP, TX  
 US 78602  
 Contact: JOE MORLEY  
 joe.morley@boringcompany.com  
 T: (512)293-2753  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)