



ASCENDUM

OIL ANALYSIS REPORT

| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |



Area
[ATLAS ORGANIC]
Machine Id
VOLVO L70H 623904
Component
Diesel Engine
Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|----------|----------|
| Sample Number | | Client Info | | ASC0010334 | --- | --- |
| Sample Date | | Client Info | | 10 Jun 2024 | --- | --- |
| Machine Age | hrs | Client Info | | 9637 | --- | --- |
| Oil Age | hrs | Client Info | | 500 | --- | --- |
| Filter Age | hrs | Client Info | | 500 | --- | --- |
| Oil Changed | | Client Info | | Changed | --- | --- |
| Filter Changed | | Client Info | | Changed | --- | --- |
| Sample Status | | | | NORMAL | --- | --- |

WEAR

All component wear rates are normal.

| | | | | | | |
|--------------|--------|-------------|------|--------------|-----|-----|
| Iron | ppm | ASTM D5185m | >100 | 12 | --- | --- |
| Chromium | ppm | ASTM D5185m | >10 | <1 | --- | --- |
| Nickel | ppm | ASTM D5185m | >10 | 0 | --- | --- |
| Titanium | ppm | ASTM D5185m | | 0 | --- | --- |
| Silver | ppm | ASTM D5185m | >2 | 0 | --- | --- |
| Aluminum | ppm | ASTM D5185m | >10 | 4 | --- | --- |
| Lead | ppm | ASTM D5185m | >20 | <1 | --- | --- |
| Copper | ppm | ASTM D5185m | >15 | 2 | --- | --- |
| Tin | ppm | ASTM D5185m | >10 | <1 | --- | --- |
| Vanadium | ppm | ASTM D5185m | | 0 | --- | --- |
| White Metal | scalar | *Visual | NONE | NONE | --- | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- | --- |

CONTAMINATION









There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|----------|-------------|-------|----------------|-----|-----|
| Silicon | ppm | ASTM D5185m | >20 | 6 | --- | --- |
| Potassium | ppm | ASTM D5185m | >20 | 2 | --- | --- |
| Fuel | | WC Method | >6.0 | <1.0 | --- | --- |
| Water | | WC Method | >0.1 | NEG | --- | --- |
| Glycol | | WC Method | | NEG | --- | --- |
| Soot % | % | *ASTM D7844 | >3 | 0.4 | --- | --- |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 7.6 | --- | --- |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 19.1 | --- | --- |
| Silt | scalar | *Visual | NONE | NONE | --- | --- |
| Debris | scalar | *Visual | NONE | NONE | --- | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- | --- |
| Odor | scalar | *Visual | NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual | >0.1 | NEG | --- | --- |

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

| | | | | | | |
|------------------|----------|-------------|-----|--------------|-----|-----|
| Sodium | ppm | ASTM D5185m | | 2 | --- | --- |
| Boron | ppm | ASTM D5185m | | 42 | --- | --- |
| Barium | ppm | ASTM D5185m | | 0 | --- | --- |
| Molybdenum | ppm | ASTM D5185m | | 51 | --- | --- |
| Manganese | ppm | ASTM D5185m | | <1 | --- | --- |
| Magnesium | ppm | ASTM D5185m | | 788 | --- | --- |
| Calcium | ppm | ASTM D5185m | | 1336 | --- | --- |
| Phosphorus | ppm | ASTM D5185m | | 1080 | --- | --- |
| Zinc | ppm | ASTM D5185m | | 1272 | --- | --- |
| Sulfur | ppm | ASTM D5185m | | 3644 | --- | --- |
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 15.2 | --- | --- |
| Base Number (BN) | mg KOH/g | ASTM D2896 | | 8.2 | --- | --- |
| Visc @ 100°C | cSt | ASTM D445 | | 14.1 | --- | --- |

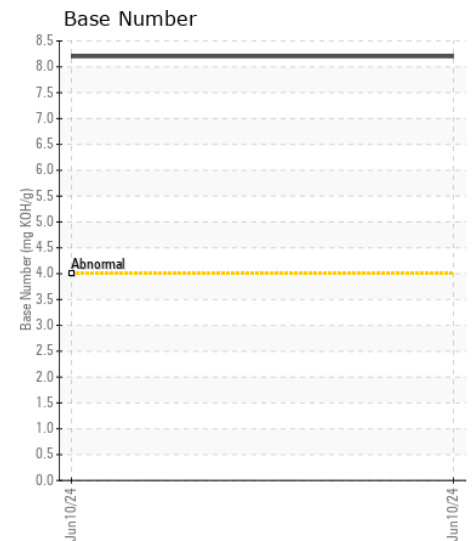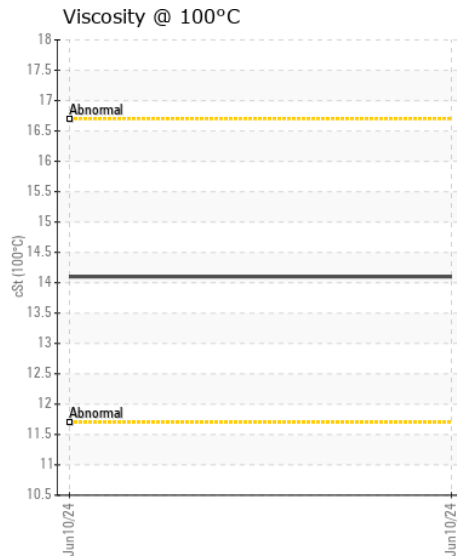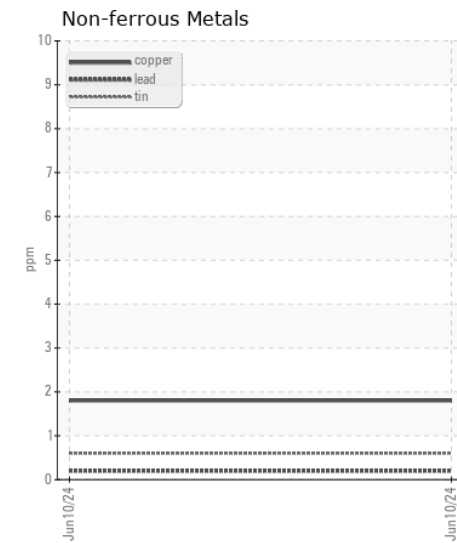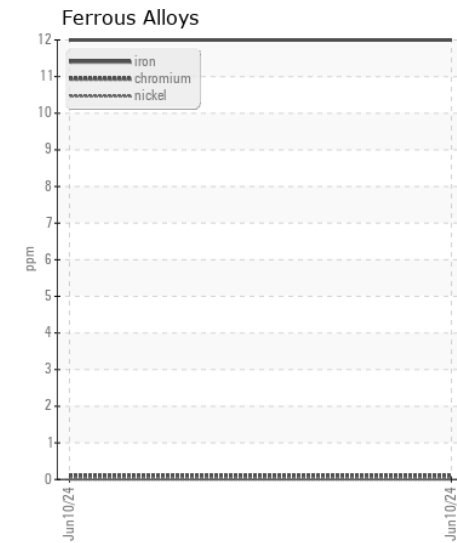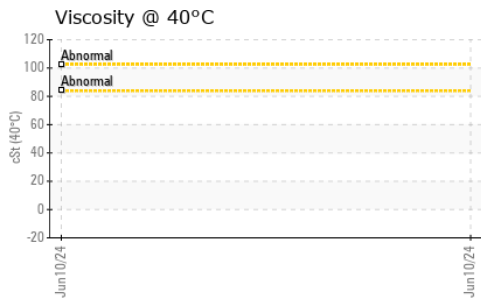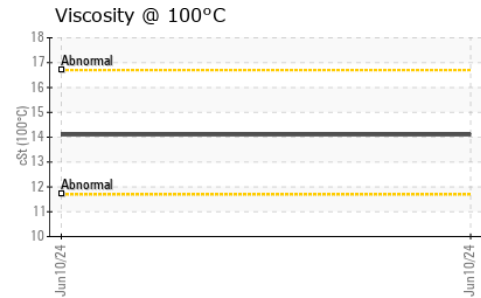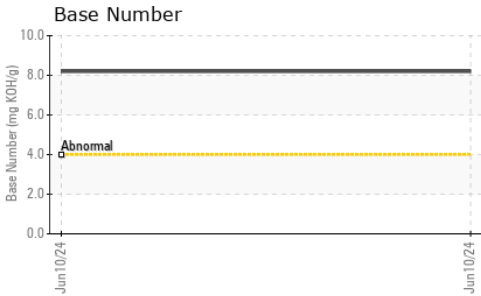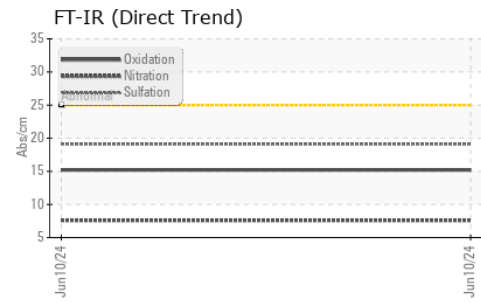

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0010334 **Received** : 14 Jun 2024
Lab Number : 06209830 **Tested** : 17 Jun 2024
Unique Number : 11082694 **Diagnosed** : 17 Jun 2024 - Don Baldrige
Test Package : CONST (Additional Tests: KV40, TBN)

113 - ASCENDUM MACHINERY INC - GARNER
 3561 JONES SAUSAGE ROAD
 GARNER, NC
 US 27529
 Contact: TRENT BROADWELL
 trent.broadwell@ascendummachinery.com
 T: (919)661-8817
 F: (919)661-9038

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)