



OIL ANALYSIS REPORT

WEAR	MARGINAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
Store 4 - Fairmont [RO# 151854]

Machine Id
JOHN DEERE 750L 1T0750LXHPF445779

Component
Diesel Engine

Fluid
JOHN DEERE ENGINE OIL PLUS 50 II 10W30 (7 GAL)

RECOMMENDATION

No corrective action is recommended at this time. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LEC0048362	LEC0040325	---
Sample Date		Client Info		11 Jun 2024	15 Aug 2023	---
Machine Age	hrs	Client Info		1020	511	---
Oil Age	hrs	Client Info		509	511	---
Filter Age	hrs	Client Info		509	5111	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				MARGINAL	ABNORMAL	---

WEAR

The copper level has decreased, but is still abnormal. In the absence of other significant wear metals, suspect copper due to sources other than wear (i.e. cooling core). All other component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	17	33	---
Chromium	ppm	ASTM D5185m	>11	<1	1	---
Nickel	ppm	ASTM D5185m	>5	2	5	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>31	5	4	---
Lead	ppm	ASTM D5185m	>26	<1	1	---
Copper	ppm	ASTM D5185m	>26	▲ 79	▲ 434	---
Tin	ppm	ASTM D5185m	>4	<1	1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>120	7	7	---
Potassium	ppm	ASTM D5185m	>20	4	3	---
Fuel		WC Method	>2.1	<1.0	<1.0	---
Water		WC Method	>0.21	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.3	0.4	---
Nitration	Abs/cm	*ASTM D7624	>20	9.0	9.4	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	22.5	22.3	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>31	2	2	---
Boron	ppm	ASTM D5185m		215	215	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		252	296	---
Manganese	ppm	ASTM D5185m		<1	5	---
Magnesium	ppm	ASTM D5185m		795	847	---
Calcium	ppm	ASTM D5185m		1478	1467	---
Phosphorus	ppm	ASTM D5185m		811	932	---
Zinc	ppm	ASTM D5185m		1117	1121	---
Sulfur	ppm	ASTM D5185m		3032	3021	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.4	17.3	---
Base Number (BN)	mg KOH/g	ASTM D2896		8.4	8.5	---
Visc @ 100°C	cSt	ASTM D445		13.9	10.2	---

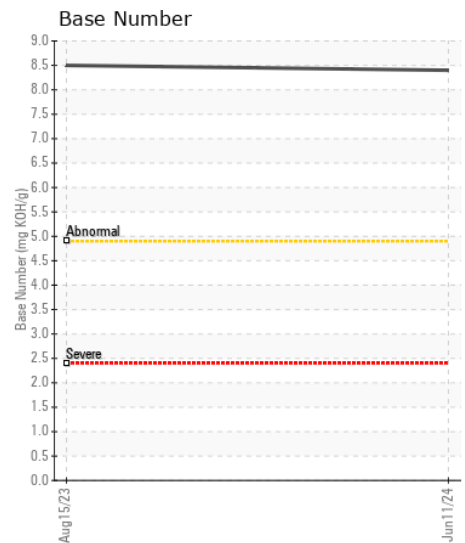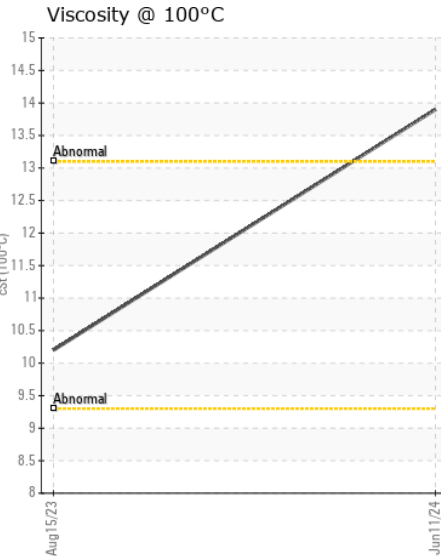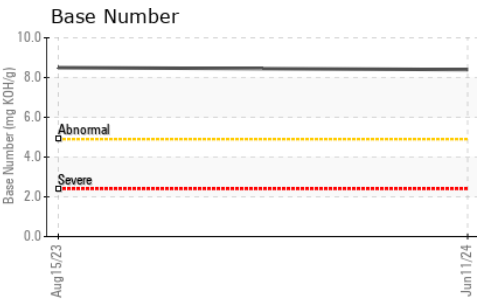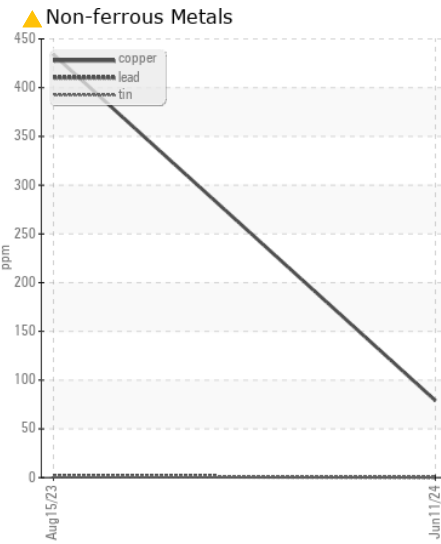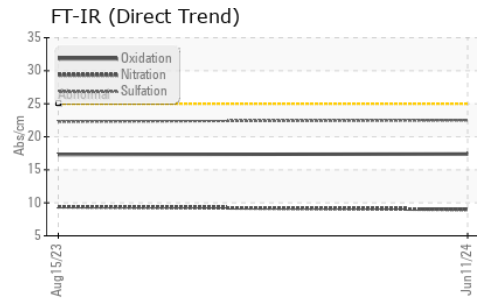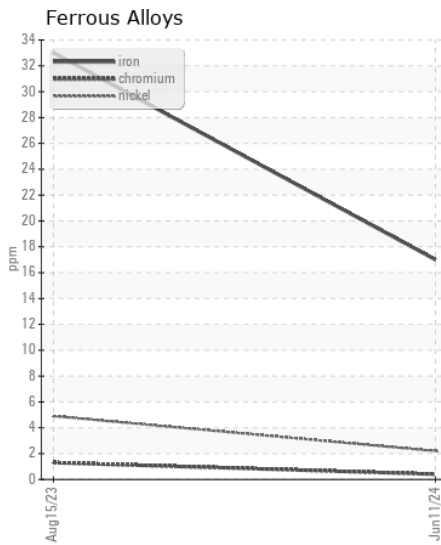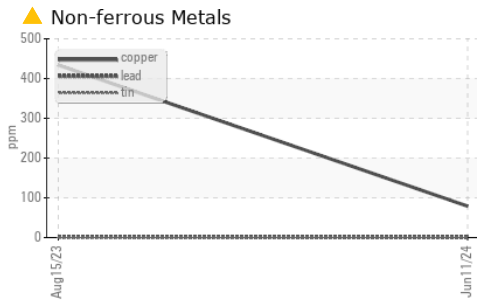

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : LEC0048362 **Received** : 14 Jun 2024
Lab Number : 06209853 **Tested** : 15 Jun 2024
Unique Number : 11082717 **Diagnosed** : 16 Jun 2024 - Doug Bogart
Test Package : CONST (Additional Tests: TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

LESLIE EQUIPMENT COMPANY
 105 TENNIS CENTER DR.
 MARIETTA, OH
 US 45750-9765
 Contact: LEANNE KENDALL
 KendalLeanne@lec1.com

T: (740)373-5570