



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area

[W8996]

Machine Id

JOHN DEERE 724L 1DW724LZELL705783

Component

Diesel Engine

Fluid

JOHN DEERE ENGINE OIL PLUS 50 II 15W40 (7 GAL)

## RECOMMENDATION

Resample at the next service interval to monitor. ( Customer Sample Comment: W8996 )

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0196822	JR0197150	---
Sample Date		Client Info		11 Jun 2024	07 Feb 2024	---
Machine Age	hrs	Client Info		4776	4232	---
Oil Age	hrs	Client Info		544	500	---
Filter Age	hrs	Client Info		544	500	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>51	16	26	---
Chromium	ppm	ASTM D5185m	>11	<1	<1	---
Nickel	ppm	ASTM D5185m	>5	<1	2	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m	>3	0	0	---
Aluminum	ppm	ASTM D5185m	>31	5	7	---
Lead	ppm	ASTM D5185m	>26	7	0	---
Copper	ppm	ASTM D5185m	>26	2	13	---
Tin	ppm	ASTM D5185m	>4	<1	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

## CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	7	6	---
Potassium	ppm	ASTM D5185m	>20	3	1	---
Fuel		WC Method	>2.1	<1.0	<1.0	---
Water		WC Method	>0.21	NEG	NEG	---
Glycol		WC Method		NEG	NEG	---
Soot %	%	*ASTM D7844	>3	0.2	0.3	---
Nitration	Abs/cm	*ASTM D7624	>20	7.7	8.1	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.3	23.2	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.21	NEG	NEG	---

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>31	0	4	---
Boron	ppm	ASTM D5185m		256	236	---
Barium	ppm	ASTM D5185m		0	<1	---
Molybdenum	ppm	ASTM D5185m		256	266	---
Manganese	ppm	ASTM D5185m		<1	1	---
Magnesium	ppm	ASTM D5185m		791	814	---
Calcium	ppm	ASTM D5185m		1376	1400	---
Phosphorus	ppm	ASTM D5185m		807	946	---
Zinc	ppm	ASTM D5185m		1062	1104	---
Sulfur	ppm	ASTM D5185m		3162	2957	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.2	17.0	---
Base Number (BN)	mg KOH/g	ASTM D2896	13.6	8.4	8.4	---
Visc @ 100°C	cSt	ASTM D445	15.4	13.3	13.5	---

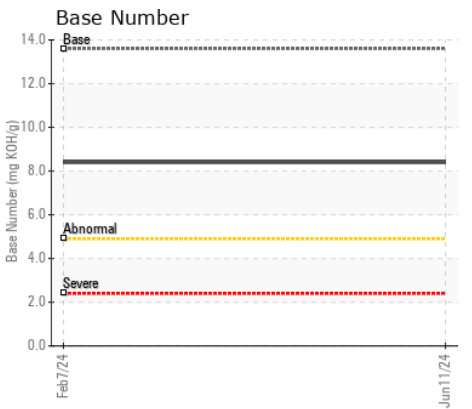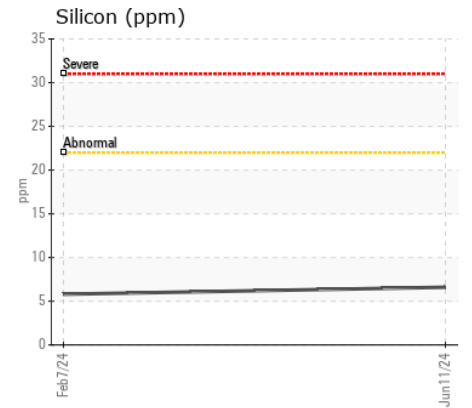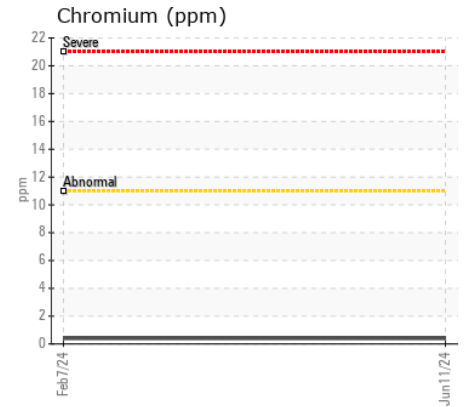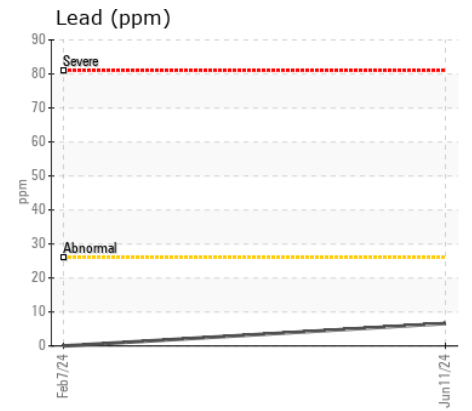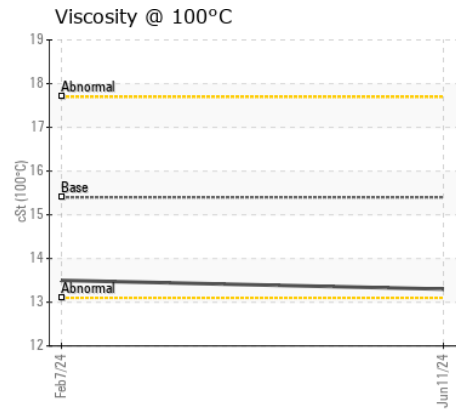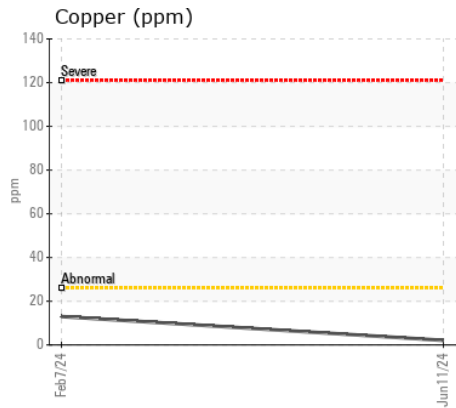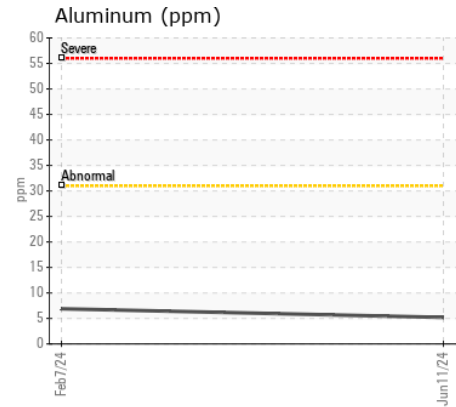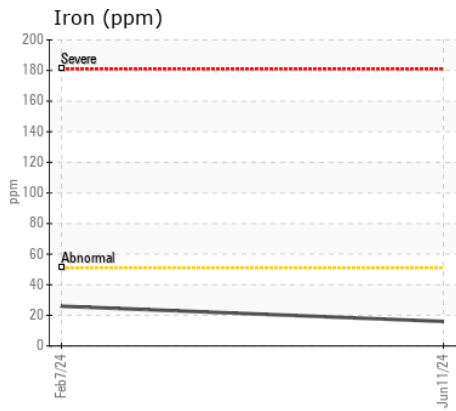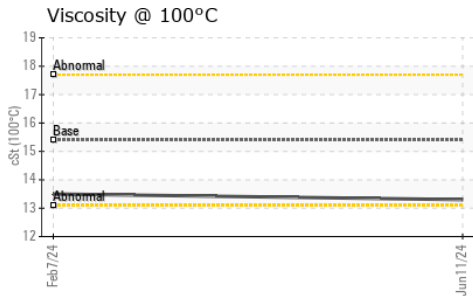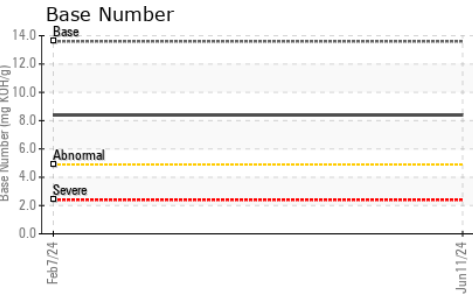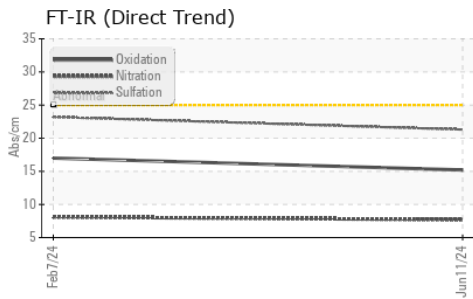

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0196822 **Received** : 14 Jun 2024  
**Lab Number** : 06209908 **Tested** : 17 Jun 2024  
**Unique Number** : 11082772 **Diagnosed** : 17 Jun 2024 - Don Baldrige  
**Test Package** : MOBCE ( Additional Tests: TBN )

**JRE - HOPE MILLS/FAYETTEVILLE**  
 5039 HWY 301 SOUTH  
 HOPE MILLS, NC  
 US 28348  
 Contact: FAYETTEVILLE SHOP  
 stephen.mullis@jamesriverequipment.com; panastasio@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: