



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Area

**Contracting**

Machine Id

**4205 4205**

Component

**Rear Vibratory Drum Gearbox**

Fluid

**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

## RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0937936	---	---
Sample Date		Client Info		11 Jun 2024	---	---
Machine Age	hrs	Client Info		1073	---	---
Oil Age	hrs	Client Info		425	---	---
Filter Age	hrs	Client Info		425	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				ABNORMAL	---	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	36	---	---
Chromium	ppm	ASTM D5185m	>10	0	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		2	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m		4	---	---
Lead	ppm	ASTM D5185m		0	---	---
Copper	ppm	ASTM D5185m		5	---	---
Tin	ppm	ASTM D5185m		0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

## CONTAMINATION











There is a light concentration of water present in the oil. The amount and size of particulates present in the system are acceptable.

Silicon	ppm	ASTM D5185m		17	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Water	%	ASTM D6304	>0.2	▲ 0.289	---	---
ppm Water	ppm	ASTM D6304	>2000	▲ 2890	---	---
Particles >4µm		ASTM D7647	>20000	5611	---	---
Particles >6µm		ASTM D7647	>5000	3057	---	---
Particles >14µm		ASTM D7647	>640	520	---	---
Particles >21µm		ASTM D7647	>160	175	---	---
Particles >38µm		ASTM D7647	>40	27	---	---
Particles >71µm		ASTM D7647	>10	3	---	---
Oil Cleanliness		ISO 4406 (c)	>21/19/16	20/19/16	---	---
Silt	scalar	*Visual	NONE	MODER	---	---
Debris	scalar	*Visual	NONE	MODER	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	0.2%	---	---

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>158	5	---	---
Boron	ppm	ASTM D5185m	250	86	---	---
Barium	ppm	ASTM D5185m	10	4	---	---
Molybdenum	ppm	ASTM D5185m	100	39	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m	450	422	---	---
Calcium	ppm	ASTM D5185m	3000	2071	---	---
Phosphorus	ppm	ASTM D5185m	1150	794	---	---
Zinc	ppm	ASTM D5185m	1350	915	---	---
Sulfur	ppm	ASTM D5185m	4250	3243	---	---
Visc @ 40°C	cSt	ASTM D445	115	77.4	---	---

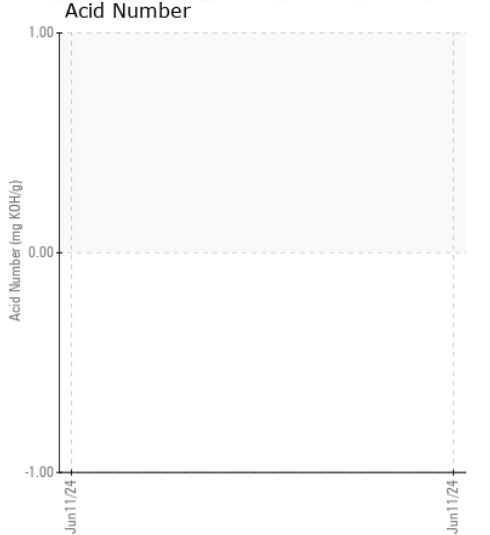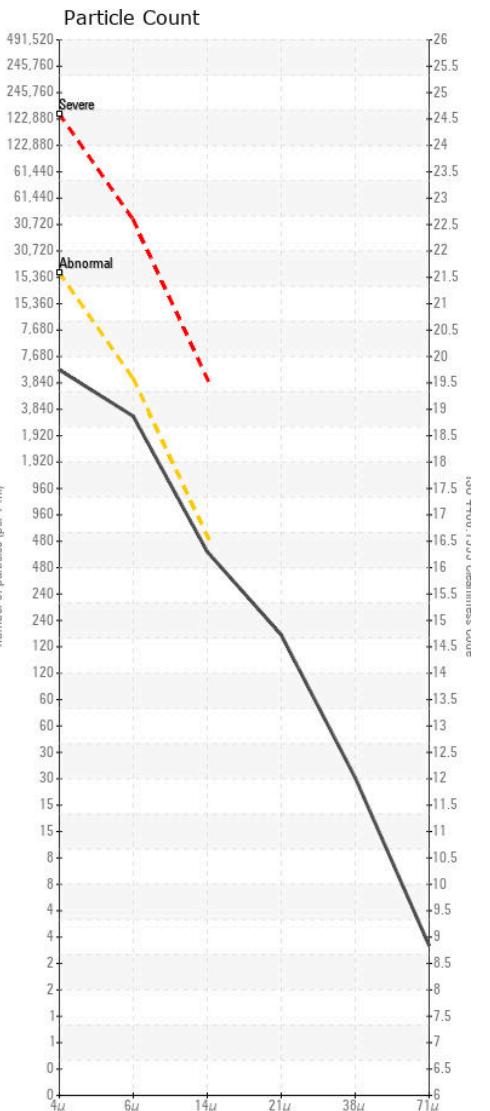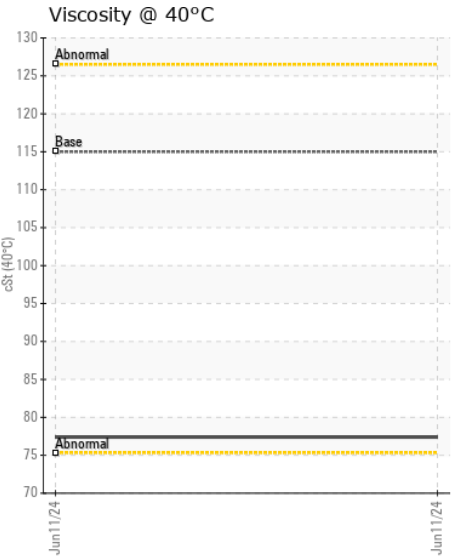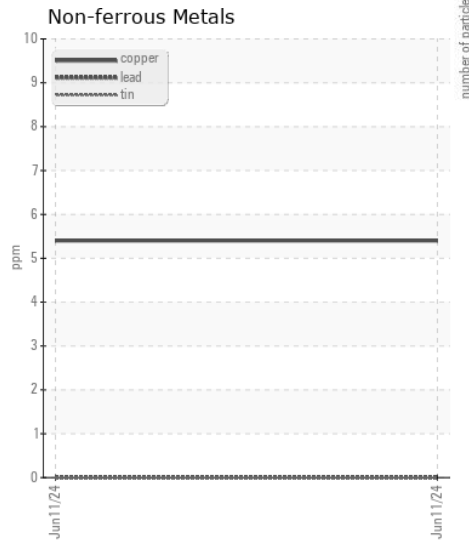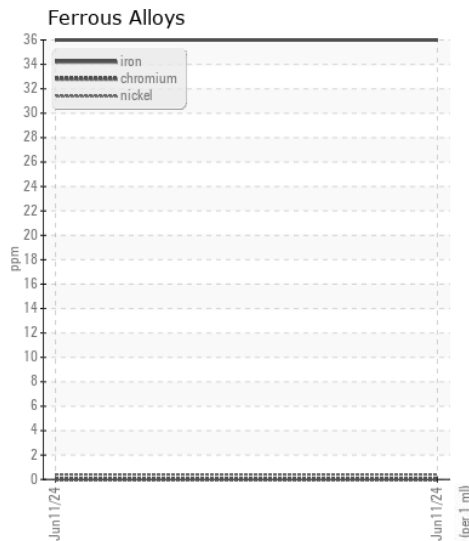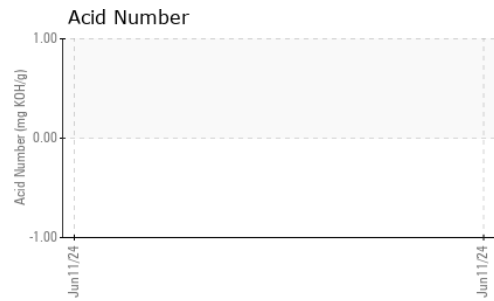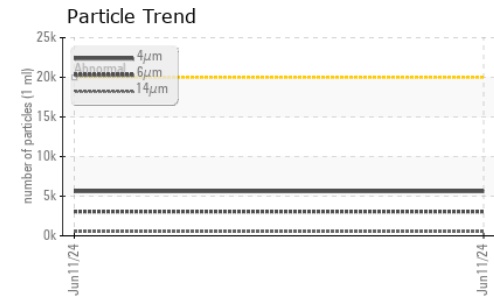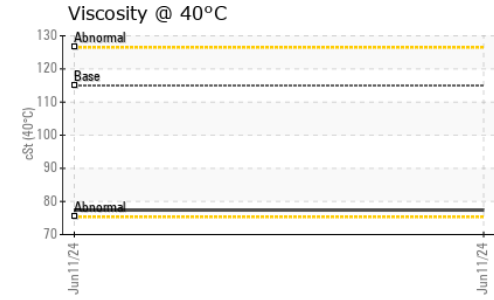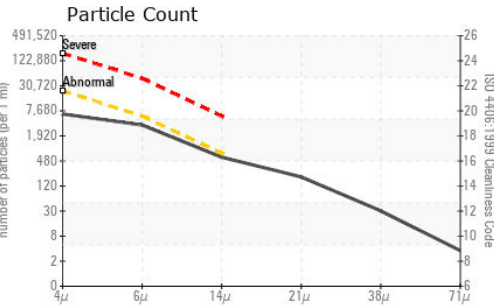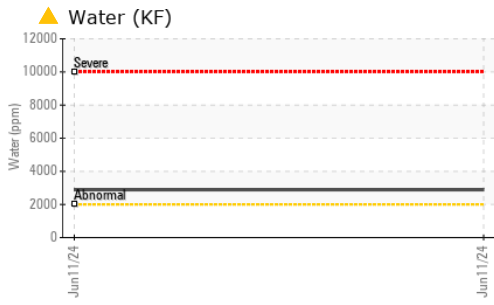

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0937936 **Received** : 14 Jun 2024  
**Lab Number** : 06209939 **Tested** : 20 Jun 2024  
**Unique Number** : 11082803 **Diagnosed** : 20 Jun 2024 - Jonathan Hester  
**Test Package** : CONST ( Additional Tests: KF, PrtCount )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**CAROLINA SUNROCK**  
 PO BOX 25  
 BUTNER, NC  
 US 27509

Contact: Leigh Dennis  
 rdennis@thesunrockgroup.com  
 T: (919)575-4505  
 F: (919)575-0162