



WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Machine Id  
**JOHN DEERE 210P 1FF210PAEPF000857**

Component  
**Hydraulic System**

Fluid  
**{not provided} (--- GAL)**

### RECOMMENDATION

We advise that you perform a filter service, and use off-line filtration to improve the cleanliness of the system fluid. We recommend an early resample to monitor this condition. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0214933	---	---
Sample Date		Client Info		11 Jun 2024	---	---
Machine Age	hrs	Client Info		623	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Chngd	---	---
Filter Changed		Client Info		Not Chngd	---	---
Sample Status				ABNORMAL	---	---

### WEAR

All component wear rates are normal.

PQ		ASTM D8184	>50	13	---	---
Iron	ppm	ASTM D5185m	>32	0	---	---
Chromium	ppm	ASTM D5185m	>9	0	---	---
Nickel	ppm	ASTM D5185m	>5	<1	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>9	0	---	---
Lead	ppm	ASTM D5185m	>28	0	---	---
Copper	ppm	ASTM D5185m	>50	0	---	---
Tin	ppm	ASTM D5185m	>5	0	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

### CONTAMINATION










There is a moderate amount of particulates (2 to 100 microns in size) present in the oil.

Silicon	ppm	ASTM D5185m	>11	2	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method	>0.075	NEG	---	---
Particles >4µm		ASTM D7647	>80000	68693	---	---
Particles >6µm		ASTM D7647	>20000	25385	---	---
Particles >14µm		ASTM D7647	>640	2731	---	---
Particles >21µm		ASTM D7647	>160	665	---	---
Particles >38µm		ASTM D7647	>40	21	---	---
Particles >71µm		ASTM D7647	>10	1	---	---
Oil Cleanliness		ISO 4406 (c)	>23/21/16	23/22/19	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.075	NEG	---	---

### FLUID CONDITION

The AN level is acceptable for this fluid. The oil is still serviceable provided that the contaminant(s) can be reduced to acceptable levels.

Sodium	ppm	ASTM D5185m	>21	3	---	---
Boron	ppm	ASTM D5185m		0	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m		1	---	---
Calcium	ppm	ASTM D5185m		8	---	---
Phosphorus	ppm	ASTM D5185m		615	---	---
Zinc	ppm	ASTM D5185m		16	---	---
Sulfur	ppm	ASTM D5185m		41	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		0.167	---	---
Visc @ 40°C	cSt	ASTM D445		48.9	---	---

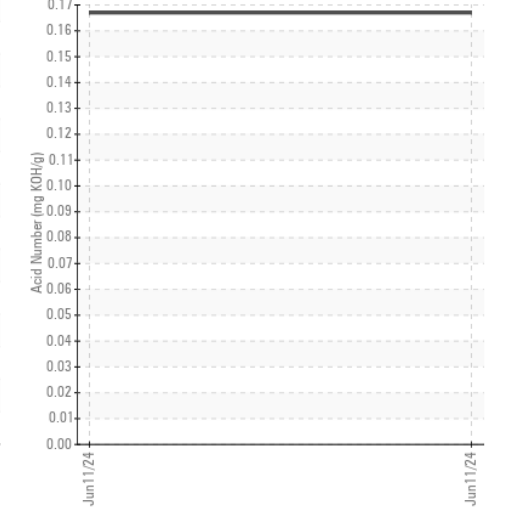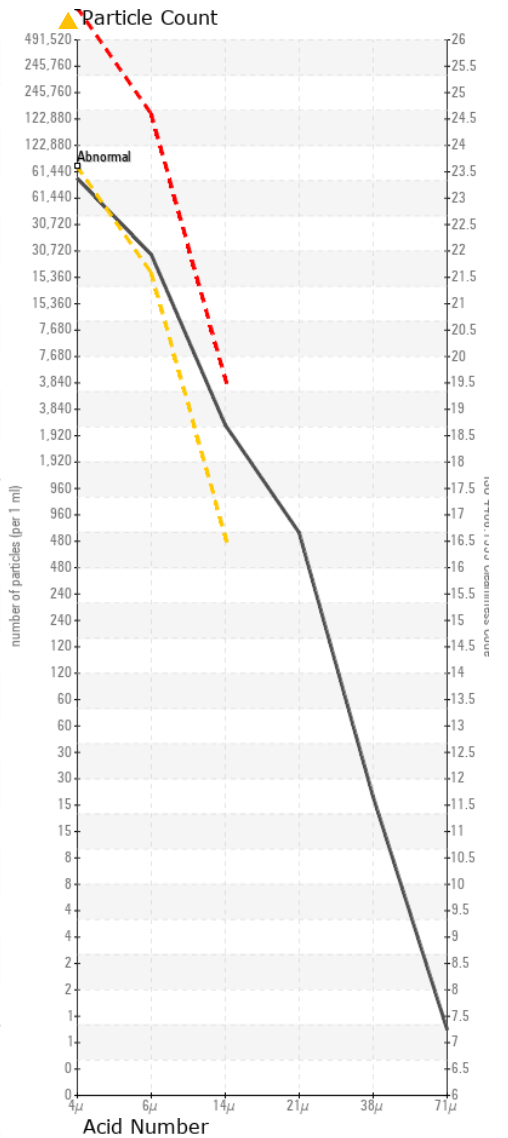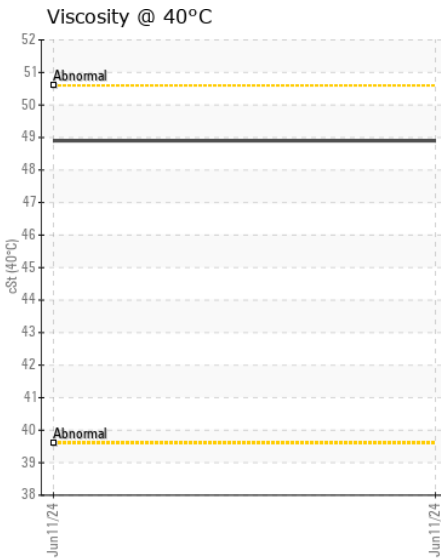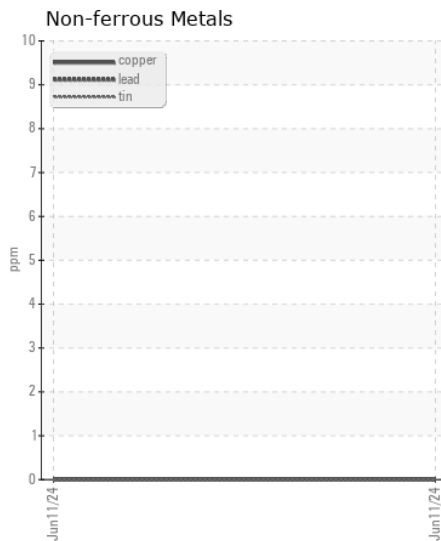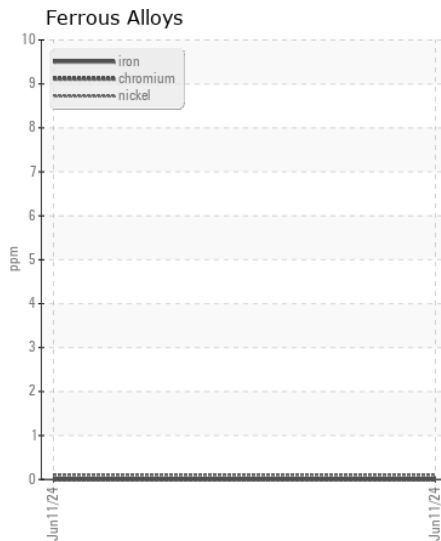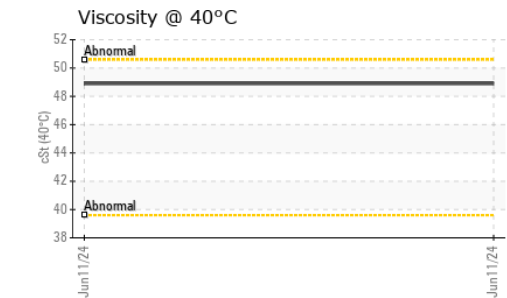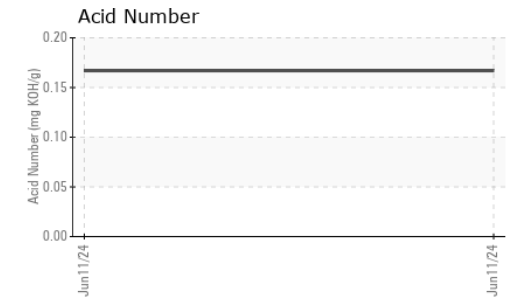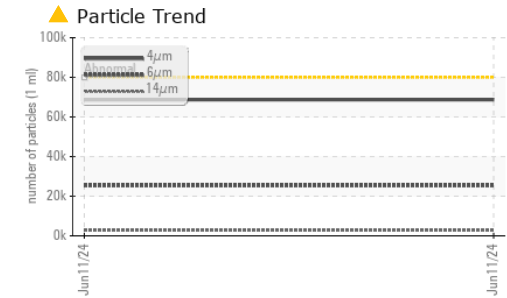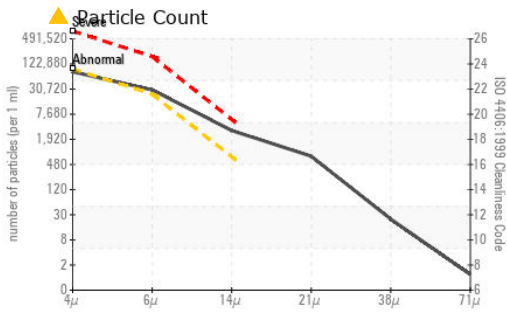

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0214933 **Received** : 14 Jun 2024  
**Lab Number** : 06209970 **Tested** : 17 Jun 2024  
**Unique Number** : 11082834 **Diagnosed** : 17 Jun 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: PQ )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**JRE - CHARLOTTE**  
 9550 STATESVILLE ROAD  
 CHARLOTTE, NC  
 US 28269

Contact: Chuck Sorrow  
 JSorrow@jamesriverequipment.com

T:

F: (704)596-6198