



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[W8996]

Machine Id

JOHN DEERE 724L 1DW724LZELL705783

Component

Hydraulic System

Fluid

JOHN DEERE HYDRAU (28 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: W8996)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0196830	JR0197149	---
Sample Date		Client Info		11 Jun 2024	07 Feb 2024	---
Machine Age	hrs	Client Info		4776	4232	---
Oil Age	hrs	Client Info		4776	4232	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Changd	Not Changd	---
Filter Changed		Client Info		Not Changd	Not Changd	---
Sample Status				NORMAL	ABNORMAL	---

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
Iron	ppm	ASTM D5185m	>20	12	12	---
Chromium	ppm	ASTM D5185m	>10	8	7	---
Nickel	ppm	ASTM D5185m	>10	<1	0	---
Titanium	ppm	ASTM D5185m		0	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>10	2	1	---
Lead	ppm	ASTM D5185m	>10	0	0	---
Copper	ppm	ASTM D5185m	>75	1	1	---
Tin	ppm	ASTM D5185m	>10	0	<1	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION












The amount and size of particulates present in the system are acceptable.

Silicon	ppm	ASTM D5185m	>20	3	2	---
Potassium	ppm	ASTM D5185m	>20	6	1	---
Water		WC Method	>0.1	NEG	NEG	---
Particles >4µm		ASTM D7647	>5000	2953	▲ 13726	---
Particles >6µm		ASTM D7647	>1300	98	111	---
Particles >14µm		ASTM D7647	>160	13	6	---
Particles >21µm		ASTM D7647	>40	3	2	---
Particles >38µm		ASTM D7647	>10	0	0	---
Particles >71µm		ASTM D7647	>3	0	0	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	19/14/11	▲ 21/14/10	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		7	5	---
Boron	ppm	ASTM D5185m		0	0	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		0	0	---
Manganese	ppm	ASTM D5185m		1	0	---
Magnesium	ppm	ASTM D5185m		1	0	---
Calcium	ppm	ASTM D5185m	87	83	82	---
Phosphorus	ppm	ASTM D5185m	727	571	581	---
Zinc	ppm	ASTM D5185m	900	732	725	---
Sulfur	ppm	ASTM D5185m	1500	1639	1437	---
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.59	0.62	---
Visc @ 40°C	cSt	ASTM D445	65	57.3	57.5	---

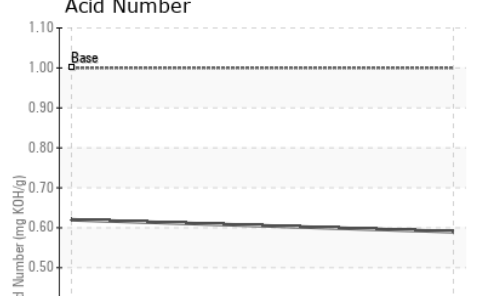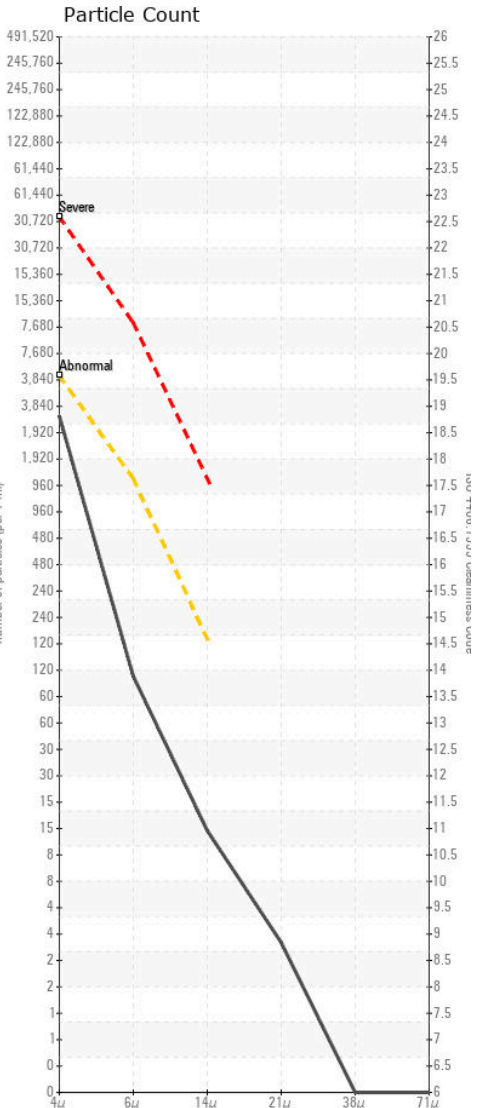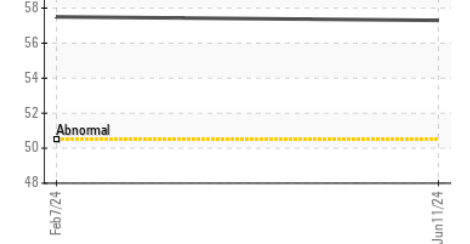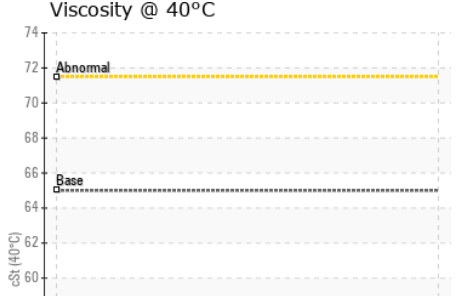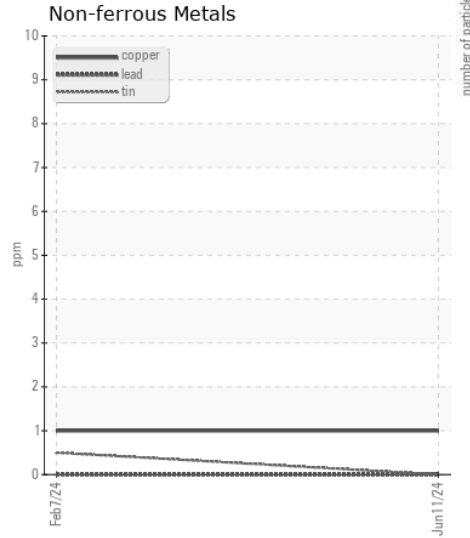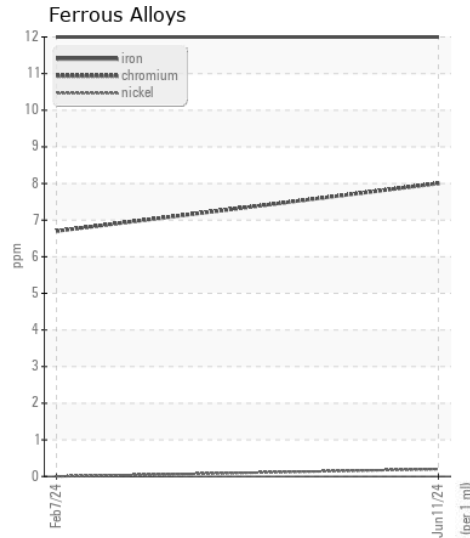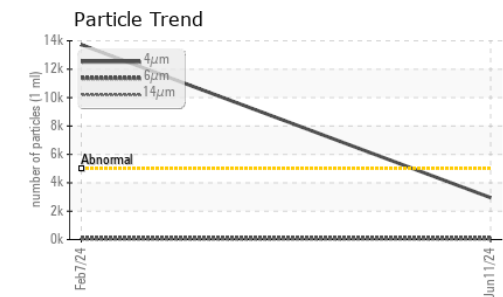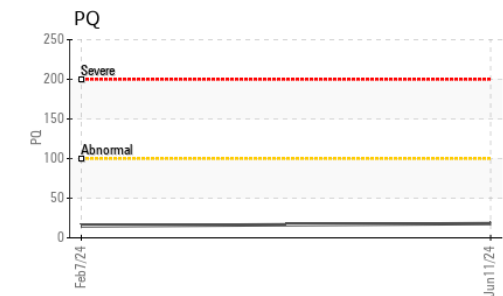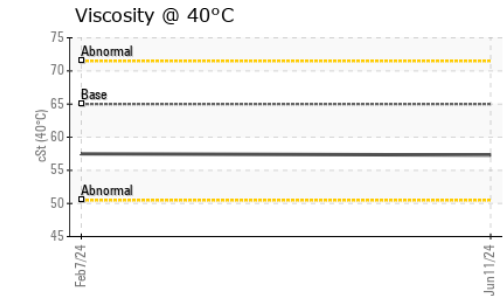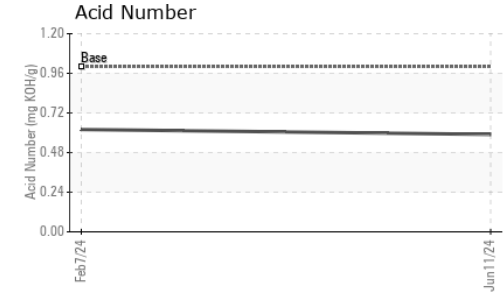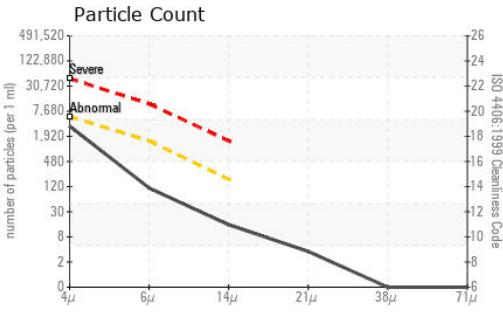

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0196830 **Received** : 14 Jun 2024
Lab Number : 06209971 **Tested** : 17 Jun 2024
Unique Number : 11082835 **Diagnosed** : 17 Jun 2024 - Angela Borella
Test Package : MOBCE (Additional Tests: PQ)

JRE - HOPE MILLS/FAYETTEVILLE
 5039 HWY 301 SOUTH
 HOPE MILLS, NC
 US 28348
 Contact: FAYETTEVILLE SHOP
 stephen.mullis@jamesriverequipment.com; panastasio@wearcheck.com

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)