



WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Machine Id
QUINCY 90853J - PRINT PLACE

Component
Compressor

Fluid
QUINCY QUINSYN (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

WEAR

All component wear rates are normal.











CONTAMINATION

There is a high amount of silt (particulates < 14 microns in size) present in the oil.

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		QUC0000617	QUC0000218	---
Sample Date		Client Info		15 May 2024	15 Feb 2023	---
Machine Age	hrs	Client Info		9138	3298	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Changed	Not Changed	---
Filter Changed		Client Info		Changed	Changed	---
Sample Status				ABNORMAL	ABNORMAL	---
Iron	ppm	ASTM D5185m	>50	2	2	---
Chromium	ppm	ASTM D5185m	>10	0	0	---
Nickel	ppm	ASTM D5185m		0	0	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>25	4	3	---
Lead	ppm	ASTM D5185m	>25	0	0	---
Copper	ppm	ASTM D5185m	>50	0	<1	---
Tin	ppm	ASTM D5185m	>15	0	0	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---
Silicon	ppm	ASTM D5185m	>25	<1	<1	---
Potassium	ppm	ASTM D5185m	>20	0	1	---
Water	%	ASTM D6304	>0.1	0.007	0.010	---
ppm Water	ppm	ASTM D6304	>1000	74	103.0	---
Particles >4µm		ASTM D7647	>10000	▲ 28514	▲ 63022	---
Particles >6µm		ASTM D7647	>2500	▲ 6331	▲ 10701	---
Particles >14µm		ASTM D7647	>320	233	▲ 369	---
Particles >21µm		ASTM D7647	>80	34	▲ 109	---
Particles >38µm		ASTM D7647	>20	3	10	---
Particles >71µm		ASTM D7647	>4	0	2	---
Oil Cleanliness		ISO 4406 (c)	>20/18/15	▲ 22/20/15	▲ 23/21/16	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	LIGHT	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---
Sodium	ppm	ASTM D5185m		1	3	---
Boron	ppm	ASTM D5185m		0	0	---
Barium	ppm	ASTM D5185m		0	1	---
Molybdenum	ppm	ASTM D5185m		0	0	---
Manganese	ppm	ASTM D5185m		0	0	---
Magnesium	ppm	ASTM D5185m		0	1	---
Calcium	ppm	ASTM D5185m		0	4	---
Phosphorus	ppm	ASTM D5185m		98	74	---
Zinc	ppm	ASTM D5185m		32	10	---
Sulfur	ppm	ASTM D5185m		985	612	---
Acid Number (AN)	mg KOH/g	ASTM D8045	.10	0.55	0.44	---
Visc @ 40°C	cSt	ASTM D445	44.6	47.9	47.3	---
Visc @ 100°C	cSt	ASTM D445	7.8	7.8	7.9	---
Viscosity Index (VI)	Scale	ASTM D2270	132	131	137	---

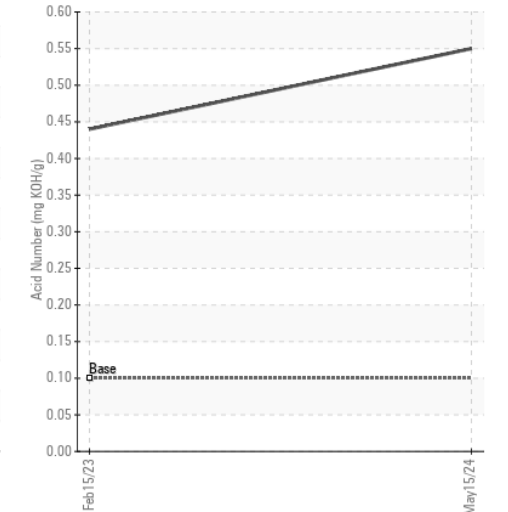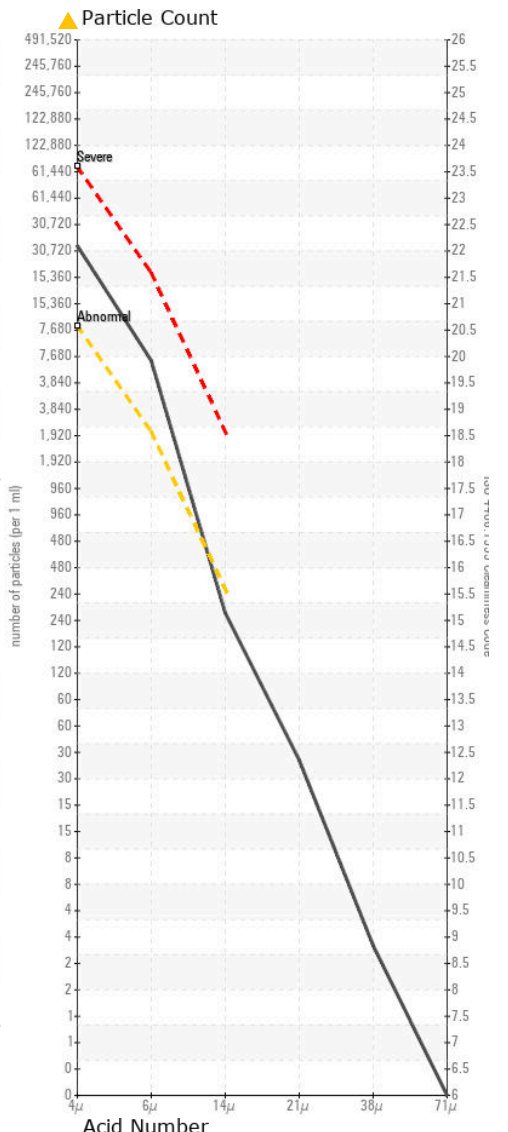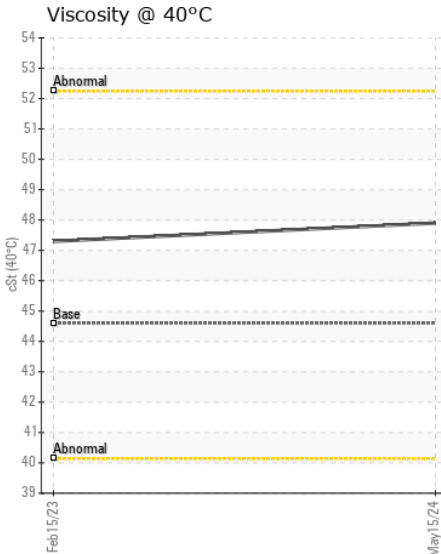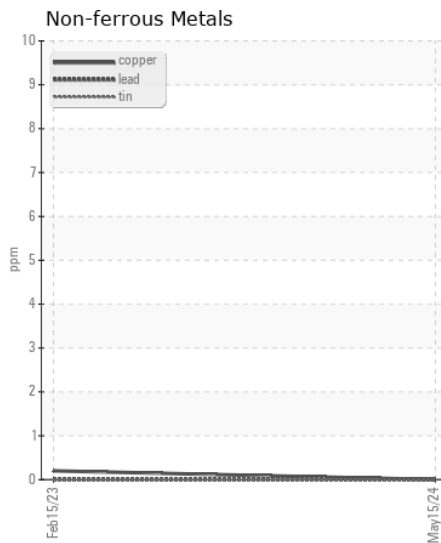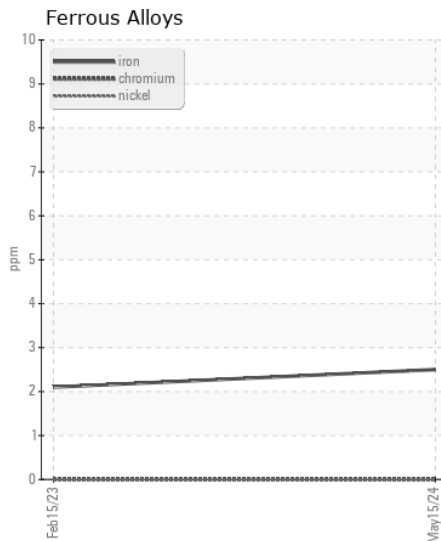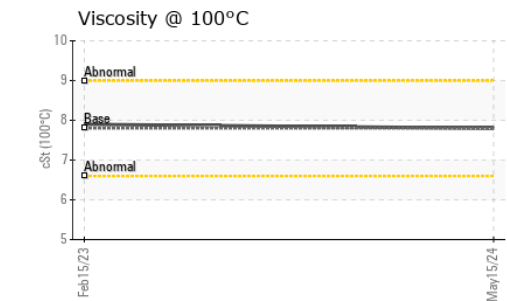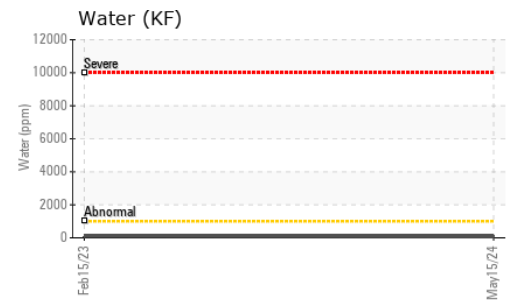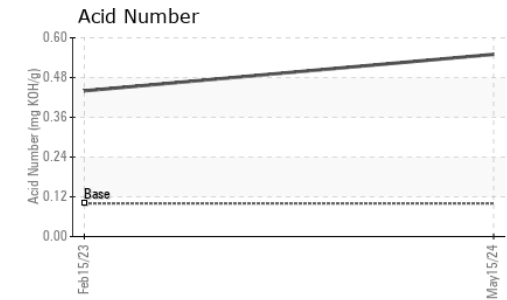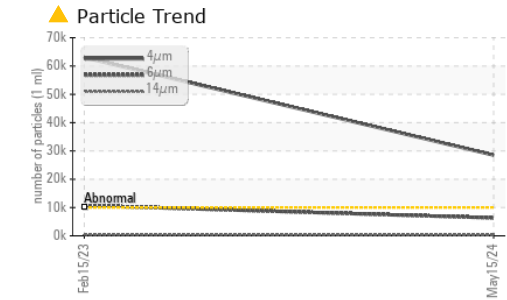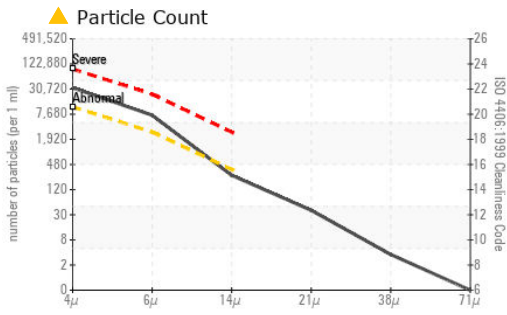

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : QUC0000617 **Received** : 14 Jun 2024
Lab Number : 06210132 **Tested** : 18 Jun 2024
Unique Number : 11082996 **Diagnosed** : 18 Jun 2024 - Angela Borella
Test Package : IND 2 (Additional Tests: KF, KV100, PrtCount, VI)
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

QUALITY COMPRESSOR
 4428 CR 616
 ALVARADO, TX
 US 76009
 Contact: SEAN
 SEAN@QCOMPRESSOR.COM
 T: (817)822-1333
 F: