



TRAAP

Texas Refinery Advanced Analysis Program

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
FREIGHTLINER 5030

Component
Transmission

Fluid
TRC TEXTRANS MULTI-VEHICLE SYN ATF (36 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		TR06210324	TR05615005	TR05481844
Sample Date		Client Info		07 Jun 2024	13 Jul 2022	13 Jan 2022
Machine Age	hrs	Client Info		4895	2795	0
Oil Age	hrs	Client Info		0	0	2162
Filter Age	hrs	Client Info		0	0	2162
Oil Changed		Client Info		Not Changd	Changed	Not Changd
Filter Changed		Client Info		Not Changd	Changed	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>250	44	103	97
Chromium	ppm	ASTM D5185m	>2	0	<1	<1
Nickel	ppm	ASTM D5185m	>2	0	<1	<1
Titanium	ppm	ASTM D5185m	>2	0	0	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>55	15	61	60
Lead	ppm	ASTM D5185m	>65	2	20	21
Copper	ppm	ASTM D5185m	>230	13	11	10
Tin	ppm	ASTM D5185m	>6	<1	4	5
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION












There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>15	6	8	6
Potassium	ppm	ASTM D5185m	>20	1	3	0
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the fluid is suitable for further service.

Sodium	ppm	ASTM D5185m		5	5	6
Boron	ppm	ASTM D5185m		244	191	123
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	1	2
Manganese	ppm	ASTM D5185m		<1	2	2
Magnesium	ppm	ASTM D5185m		<1	<1	0
Calcium	ppm	ASTM D5185m		258	91	37
Phosphorus	ppm	ASTM D5185m		658	362	293
Zinc	ppm	ASTM D5185m		0	2	0
Sulfur	ppm	ASTM D5185m		2700	1226	679
Acid Number (AN)	mg KOH/g	ASTM D8045		2.00	1.41	0.99
Visc @ 40°C	cSt	ASTM D445		35.3	---	---
Visc @ 100°C	cSt	ASTM D445	7.3	7.2	7.4	7.3
Viscosity Index (VI)	Scale	ASTM D2270	193	173	---	---

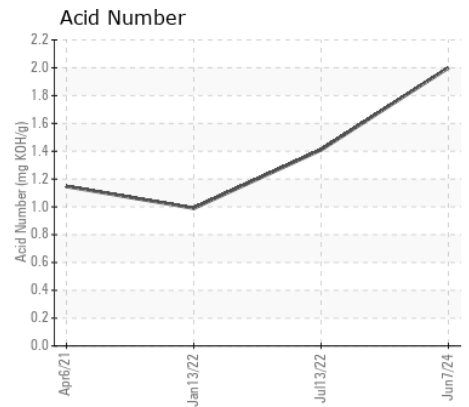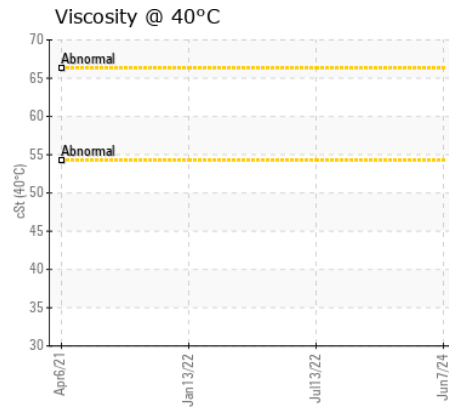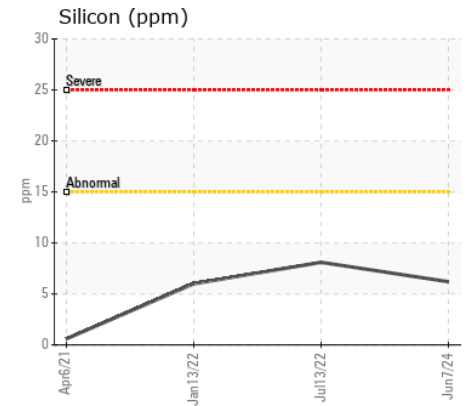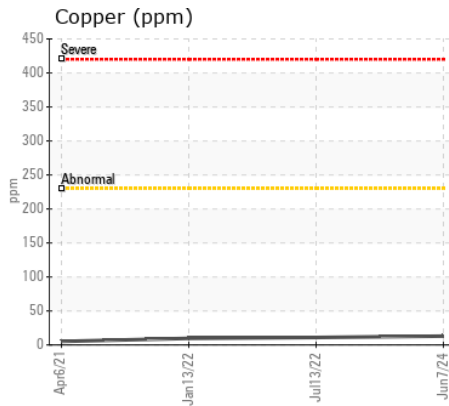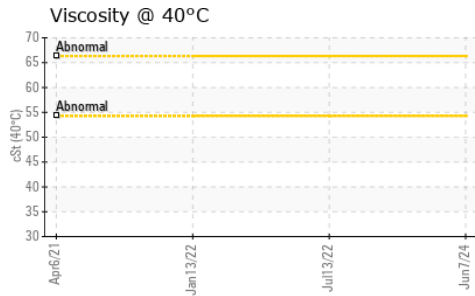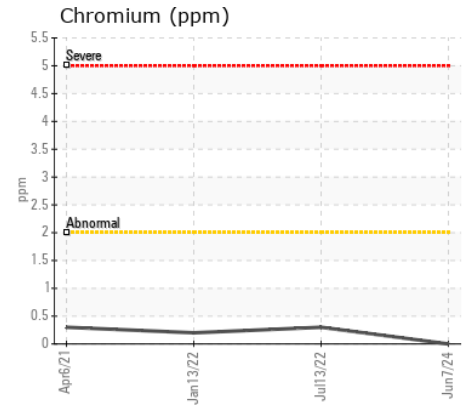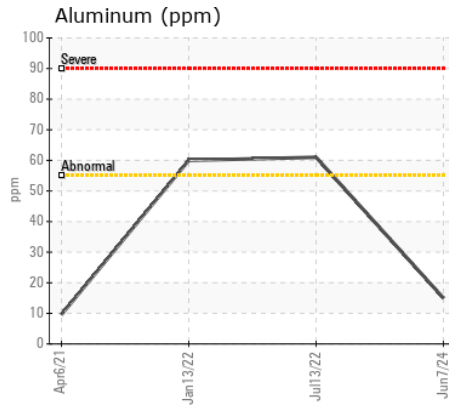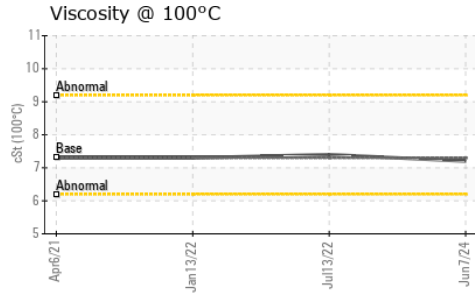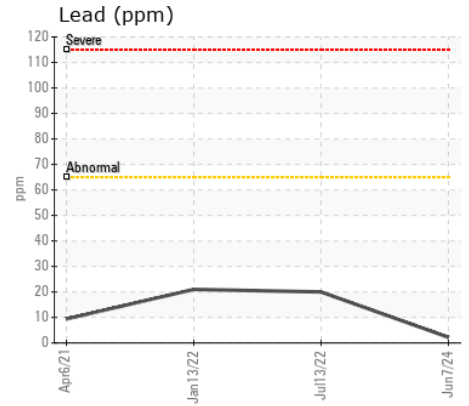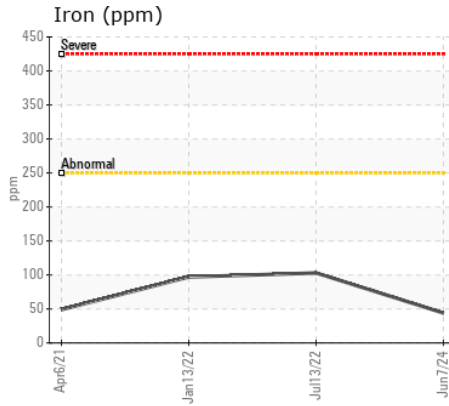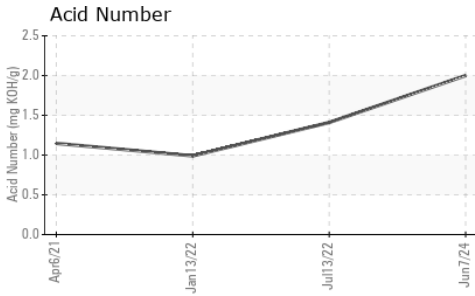

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : TR06210324 **Received** : 14 Jun 2024
Lab Number : 06210324 **Tested** : 18 Jun 2024
Unique Number : 11083188 **Diagnosed** : 18 Jun 2024 - Don Baldrige
Test Package : MOB 2 (Additional Tests: KV100, VI)

MATHIOWETZ CONSTRUCTION COMPANY
 30676 COUNTY RD 24
 SLEEPY EYE, MN
 US 56085
 Contact: Jim Warwick
 jimwarwick@mathiowetzconst.com

To discuss this sample report, contact Customer Service at 1-800-827-0711.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: