



OIL ANALYSIS REPORT

WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[G15280]
 Machine Id
JOHN DEERE 715403
 Component
Front Differential
 Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- GAL)

RECOMMENDATION

The oil change at the time of sampling has been noted. No corrective action is recommended at this time. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WE0007308	---	---
Sample Date		Client Info		11 Jun 2024	---	---
Machine Age	hrs	Client Info		9538	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				ABNORMAL	---	---

WEAR

The aluminum level is abnormal. The lead level is abnormal.

PQ		ASTM D8184		25	---	---
Iron	ppm	ASTM D5185m	>500	104	---	---
Chromium	ppm	ASTM D5185m	>10	<1	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>25	▲ 133	---	---
Lead	ppm	ASTM D5185m	>25	▲ 48	---	---
Copper	ppm	ASTM D5185m	>100	24	---	---
Tin	ppm	ASTM D5185m	>10	1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	8	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method	>.2	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	---	---
Boron	ppm	ASTM D5185m	6	1	---	---
Barium	ppm	ASTM D5185m	0	0	---	---
Molybdenum	ppm	ASTM D5185m	0	59	---	---
Manganese	ppm	ASTM D5185m		1	---	---
Magnesium	ppm	ASTM D5185m	145	103	---	---
Calcium	ppm	ASTM D5185m	3570	3457	---	---
Phosphorus	ppm	ASTM D5185m	1290	1094	---	---
Zinc	ppm	ASTM D5185m	1640	1293	---	---
Sulfur	ppm	ASTM D5185m		4015	---	---
Visc @ 40°C	cSt	ASTM D445	57.0	48.4	---	---

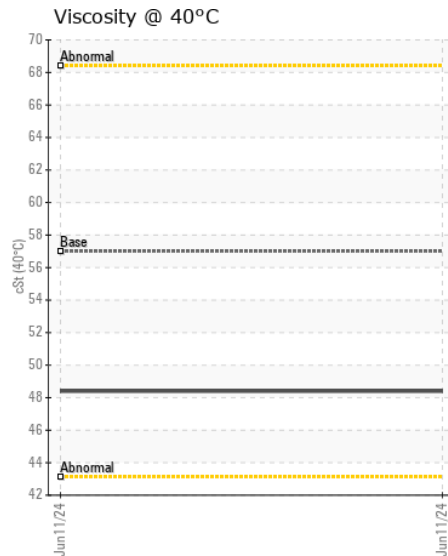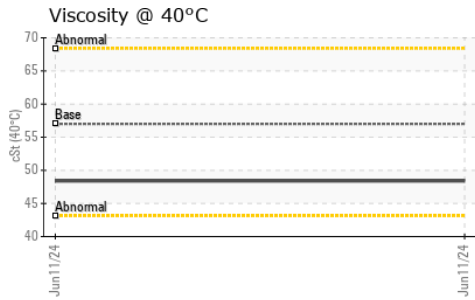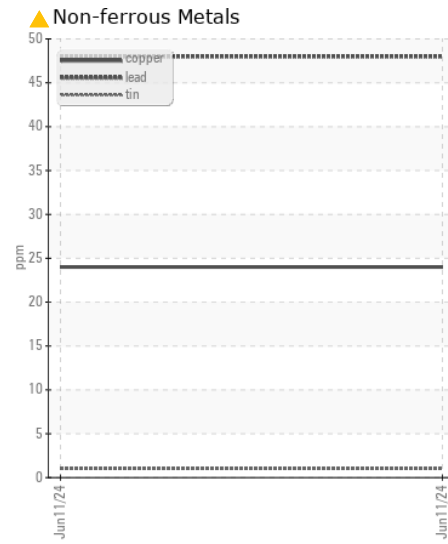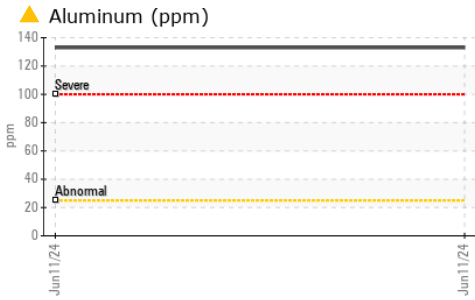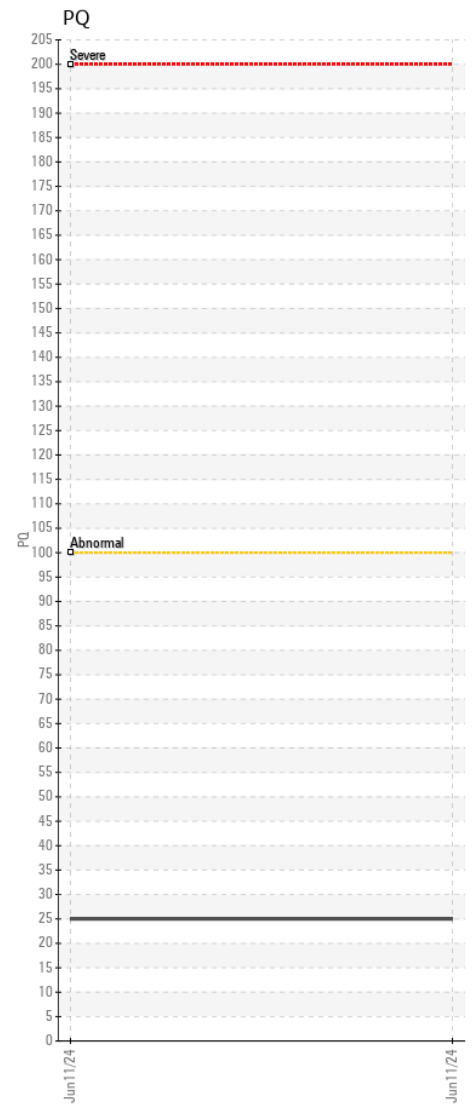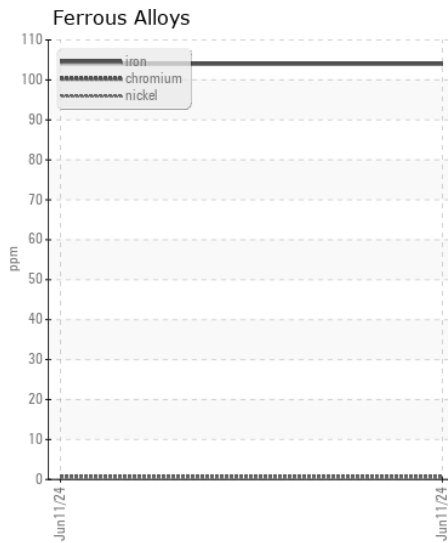

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WE0007308

Lab Number : 06210402

Unique Number : 11083266

Test Package : CONST (Additional Tests: PQ)

Received : 14 Jun 2024

Tested : 17 Jun 2024

Diagnosed : 18 Jun 2024 - Don Baldrige

WARRIOR TRACTOR AND EQUIPMENT - GRAYSVILLE

4308 WATER TRAIL

GRAYSVILLE, AL

US 35073

Contact: BEN BYRKET

bbyrket@warriortractor.com

T: (205)675-9045

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)