



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 650P 1DW650PAEPLX03867
 Component
Left Final Drive
 Fluid
JOHN DEERE HY-GARD HYD/TRANS (--- QTS)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WE0007759	---	---
Sample Date		Client Info		12 Jun 2024	---	---
Machine Age	hrs	Client Info		432	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				ABNORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	47	---	---
Iron	ppm	ASTM D5185m	>750	71	---	---
Chromium	ppm	ASTM D5185m	>9	1	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>40	3	---	---
Lead	ppm	ASTM D5185m	>15	2	---	---
Copper	ppm	ASTM D5185m	>40	3	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION







Moderate concentration of visible dirt/debris present in the oil.

Silicon	ppm	ASTM D5185m	>75	7	---	---
Potassium	ppm	ASTM D5185m	>20	3	---	---
Water		WC Method	>0.075	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	▲ MODER	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.075	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	3	---	---
Boron	ppm	ASTM D5185m	6	2	---	---
Barium	ppm	ASTM D5185m	0	3	---	---
Molybdenum	ppm	ASTM D5185m	0	2	---	---
Manganese	ppm	ASTM D5185m		3	---	---
Magnesium	ppm	ASTM D5185m	145	107	---	---
Calcium	ppm	ASTM D5185m	3570	3641	---	---
Phosphorus	ppm	ASTM D5185m	1290	1081	---	---
Zinc	ppm	ASTM D5185m	1640	1316	---	---
Sulfur	ppm	ASTM D5185m		3937	---	---
Visc @ 40°C	cSt	ASTM D445	57.0	52.5	---	---

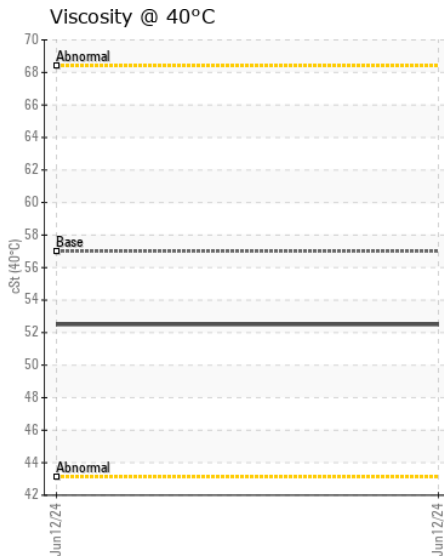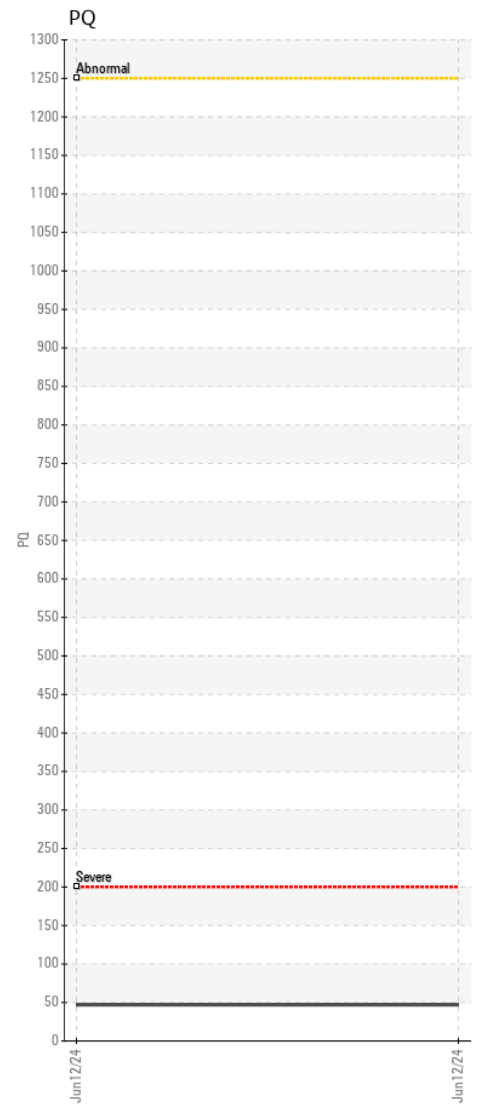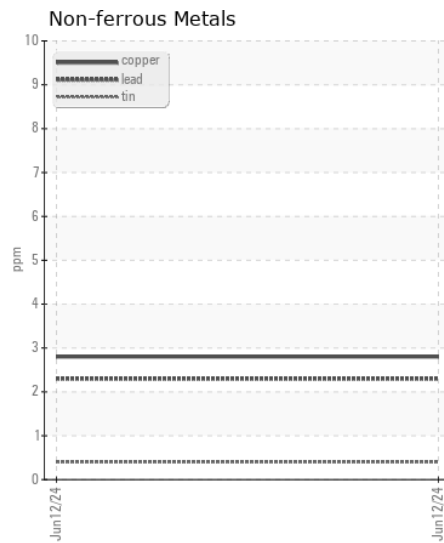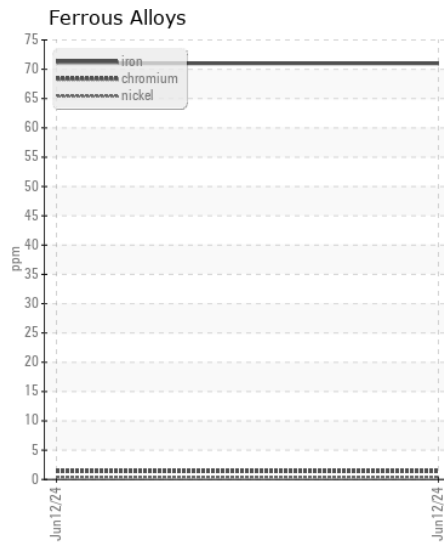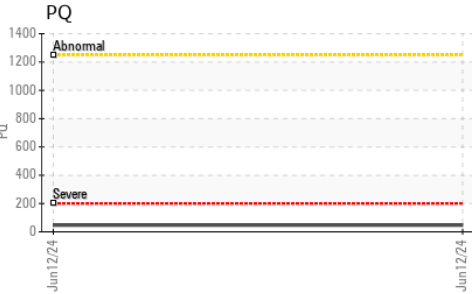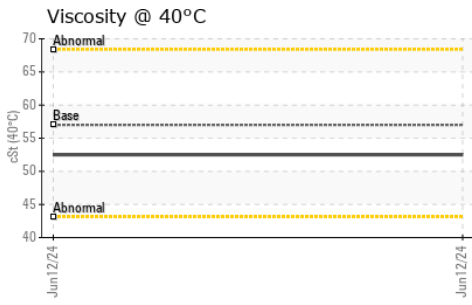

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WE0007759 **Received** : 14 Jun 2024
Lab Number : 06210404 **Tested** : 17 Jun 2024
Unique Number : 11083268 **Diagnosed** : 18 Jun 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

WARRIOR TRACTOR AND EQUIPMENT - NORTHPORT
 P.O. BOX 412
 NORTHPORT, AL
 US 35476
 Contact: PAMELA CLARK
 pamela@warriortractor.com
 T: (205)339-0300
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)