



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area

**BLYTHE**

Machine Id

**HAMM HD110IVT H2090226**

Component

**Rear Drum of Oil**

Fluid

**GEAR OIL LS 80W90 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0209720</b>	JR0202221	JR0168212
Sample Date		Client Info		<b>12 Jun 2024</b>	07 Feb 2024	17 May 2023
Machine Age	hrs	Client Info		<b>5126</b>	4864	4350
Oil Age	hrs	Client Info		<b>0</b>	514	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Changed
Filter Changed		Client Info		<b>None</b>	N/A	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

PQ		ASTM D8184		<b>18</b>	28	13
Iron	ppm	ASTM D5185m		<b>3</b>	149	<1
Chromium	ppm	ASTM D5185m		<b>&lt;1</b>	1	0
Nickel	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m		<b>1</b>	1	0
Lead	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Tin	ppm	ASTM D5185m		<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m		<b>3</b>	5	1
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	2	1
Water		WC Method		<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual		<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<b>2</b>	0	1
Boron	ppm	ASTM D5185m	150	<b>6</b>	122	171
Barium	ppm	ASTM D5185m		<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	<1	2
Manganese	ppm	ASTM D5185m		<b>0</b>	2	<1
Magnesium	ppm	ASTM D5185m	10	<b>&lt;1</b>	129	2
Calcium	ppm	ASTM D5185m	70	<b>0</b>	21	75
Phosphorus	ppm	ASTM D5185m	2000	<b>2705</b>	1286	1211
Zinc	ppm	ASTM D5185m	50	<b>6</b>	12	11
Sulfur	ppm	ASTM D5185m	20000	<b>33748</b>	23641	31276
Visc @ 40°C	cSt	ASTM D445	140	<b>150</b>	164	116.7

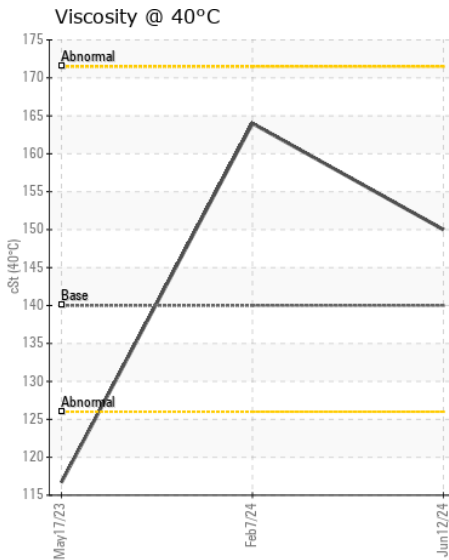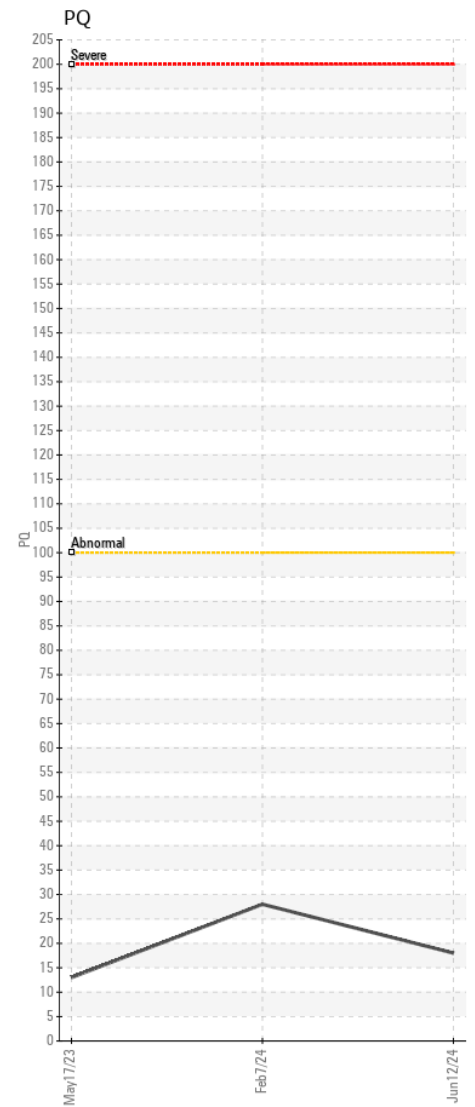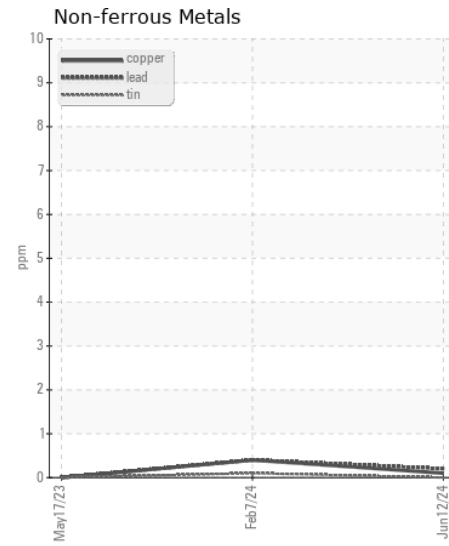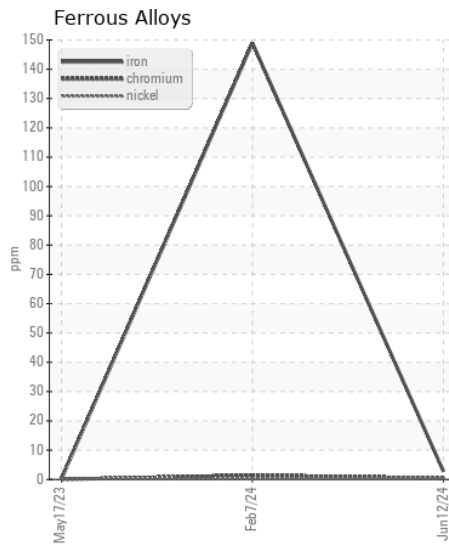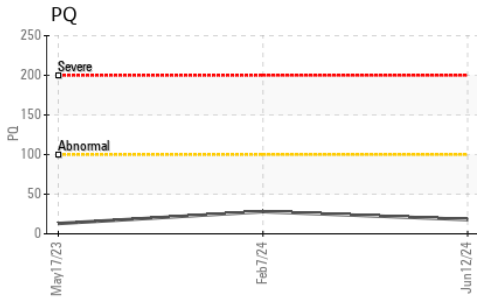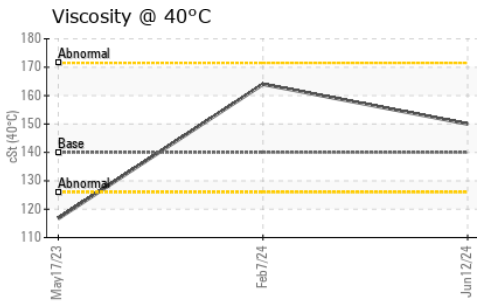

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0209720 **Received** : 14 Jun 2024  
**Lab Number** : 06210427 **Tested** : 17 Jun 2024  
**Unique Number** : 11083291 **Diagnosed** : 18 Jun 2024 - Don Baldrige  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - GARNER**  
 4161 AUBURN CHURCH RD  
 GARNER, NC  
 US 27529

Contact: RALEIGH SHOP  
 sean.betts@jamesriverequipment.com; catherine.anastasio@wearcheck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (919)614-2260  
 F: (919)779-5432