



WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL



Machine Id
JOHN DEERE 300D 1DW300DXJEE660577
Component
Front Left Final Drive
Fluid
JOHN DEERE GL-5 80W90 (--- QTS)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

WEAR

All component wear rates are normal.







CONTAMINATION

Moderate concentration of visible dirt/debris present in the oil.

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0213148	JRMC411293	JRMC400212
Sample Date		Client Info		13 Jun 2024	15 Sep 2017	10 May 2016
Machine Age	hrs	Client Info		8984	4005	2238
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	Changed	Changed
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				ABNORMAL	ATTENTION	NORMAL
PQ		ASTM D8184	>1250	95	23	73.0
Iron	ppm	ASTM D5185m	>750	50	61	337
Chromium	ppm	ASTM D5185m	>9	<1	<1	2
Nickel	ppm	ASTM D5185m	>10	<1	<1	<1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>40	2	1	4
Lead	ppm	ASTM D5185m	>15	<1	<1	<1
Copper	ppm	ASTM D5185m	>40	3	2	12
Tin	ppm	ASTM D5185m	>10	0	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	VHEVY
Yellow Metal	scalar	*Visual	NONE	MODER	NONE	NONE
Silicon	ppm	ASTM D5185m	>75	5	2	5
Potassium	ppm	ASTM D5185m	>20	<1	<1	0
Water		WC Method	>0.075	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	MODER	NONE	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	NEG
Sodium	ppm	ASTM D5185m	>51	1	2	9
Boron	ppm	ASTM D5185m		19	164	3
Barium	ppm	ASTM D5185m		0	0	2
Molybdenum	ppm	ASTM D5185m		2	3	8
Manganese	ppm	ASTM D5185m		<1	2	10
Magnesium	ppm	ASTM D5185m		2	0	3
Calcium	ppm	ASTM D5185m		0	8	35
Phosphorus	ppm	ASTM D5185m		1216	1399	2102
Zinc	ppm	ASTM D5185m		12	9	40
Sulfur	ppm	ASTM D5185m		23781	10675	25275
Visc @ 40°C	cSt	ASTM D445		141	54.45	136.0

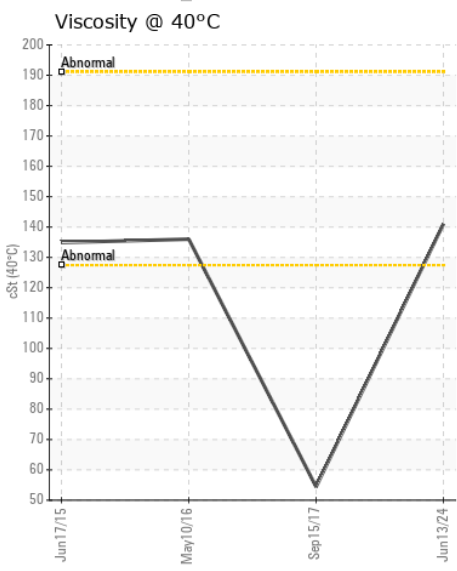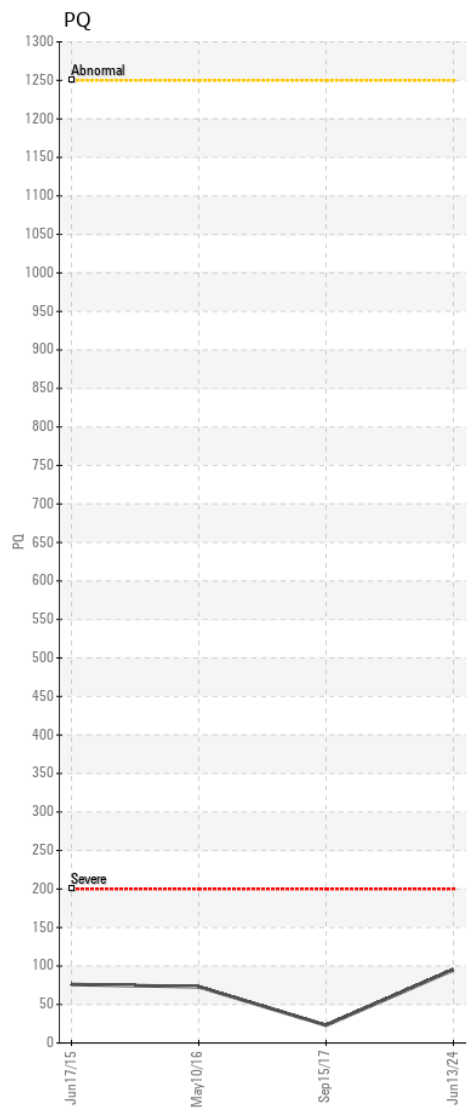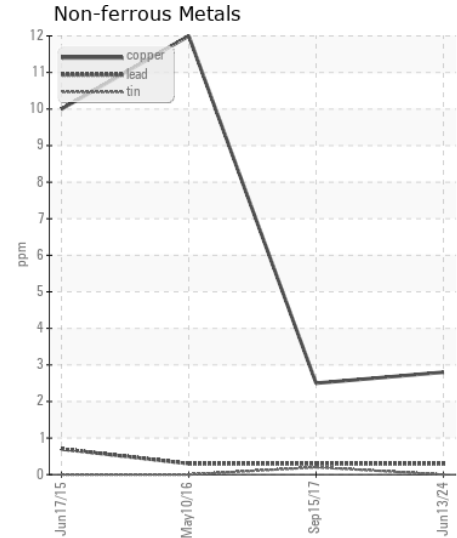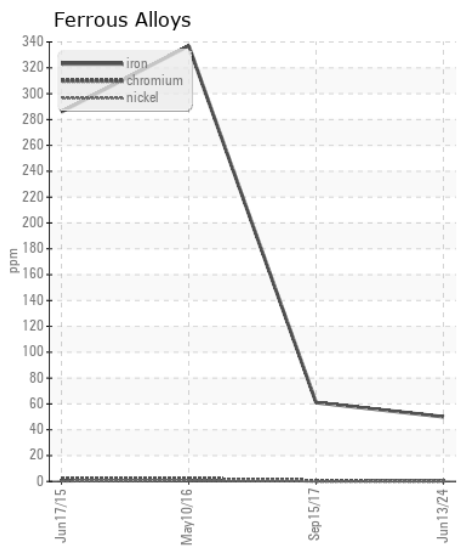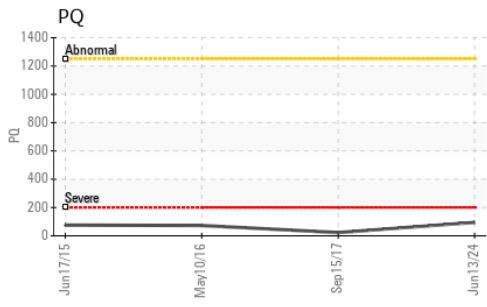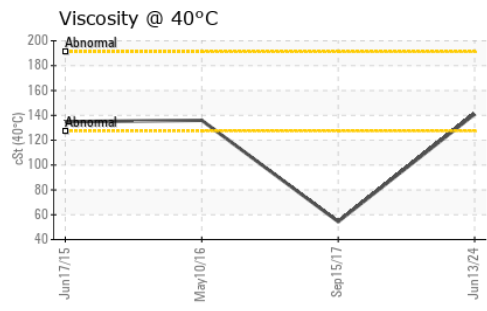

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0213148 **Received** : 14 Jun 2024
Lab Number : 06210429 **Tested** : 18 Jun 2024
Unique Number : 11083293 **Diagnosed** : 18 Jun 2024 - Don Baldrige
Test Package : CONST (Additional Tests: PQ)

JRE - GREENSBORO
 411 SOUTH REGIONAL ROAD
 GREENSBORO, NC
 US 27409
 Contact: NICK GALLAHER
 NGALLAHER@JRENET.COM
 T: (336)668-2762
 F: (336)665-9556

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)