



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**CATERPILLAR 908M C237144 (S/N CAT0908MLH8801142)**  
 Component  
**Front Differential**  
 Fluid  
**CAT TDTO 30W (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>JR0218690</b>	JR0191349	---
Sample Date		Client Info		<b>04 Jun 2024</b>	07 Dec 2023	---
Machine Age	hrs	Client Info		<b>5333</b>	4885	---
Oil Age	hrs	Client Info		<b>448</b>	0	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Not Changd</b>	Changed	---
Filter Changed		Client Info		<b>N/A</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---

### WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		<b>40</b>	95	---
Iron	ppm	ASTM D5185m	>500	<b>69</b>	136	---
Chromium	ppm	ASTM D5185m	>3	<b>1</b>	2	---
Nickel	ppm	ASTM D5185m	>3	<b>&lt;1</b>	<1	---
Titanium	ppm	ASTM D5185m	>2	<b>1</b>	2	---
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>30	<b>2</b>	2	---
Lead	ppm	ASTM D5185m	>13	<b>&lt;1</b>	<1	---
Copper	ppm	ASTM D5185m	>103	<b>6</b>	19	---
Tin	ppm	ASTM D5185m	>5	<b>&lt;1</b>	<1	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION







There is no indication of any contamination in the oil.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Silicon	ppm	ASTM D5185m	>100	<b>8</b>	10	---
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	10	---
Water		WC Method	>.2	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>.2	<b>NEG</b>	NEG	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	1	---
Boron	ppm	ASTM D5185m		<b>4</b>	11	---
Barium	ppm	ASTM D5185m		<b>2</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Manganese	ppm	ASTM D5185m		<b>3</b>	6	---
Magnesium	ppm	ASTM D5185m		<b>11</b>	9	---
Calcium	ppm	ASTM D5185m	2980	<b>2832</b>	2988	---
Phosphorus	ppm	ASTM D5185m	1100	<b>955</b>	1029	---
Zinc	ppm	ASTM D5185m	1270	<b>1179</b>	1174	---
Sulfur	ppm	ASTM D5185m		<b>7481</b>	9489	---
Visc @ 40°C	cSt	ASTM D445	100	<b>84.7</b>	81.0	---

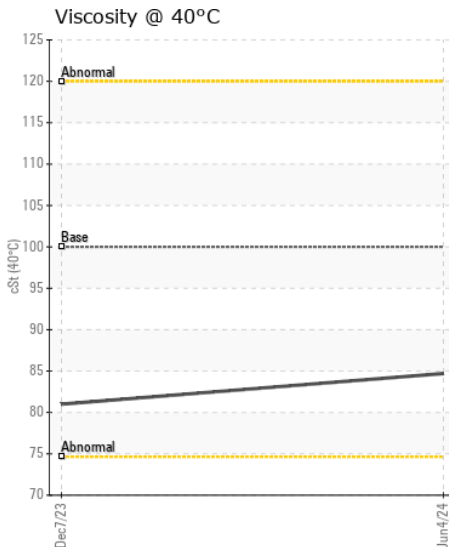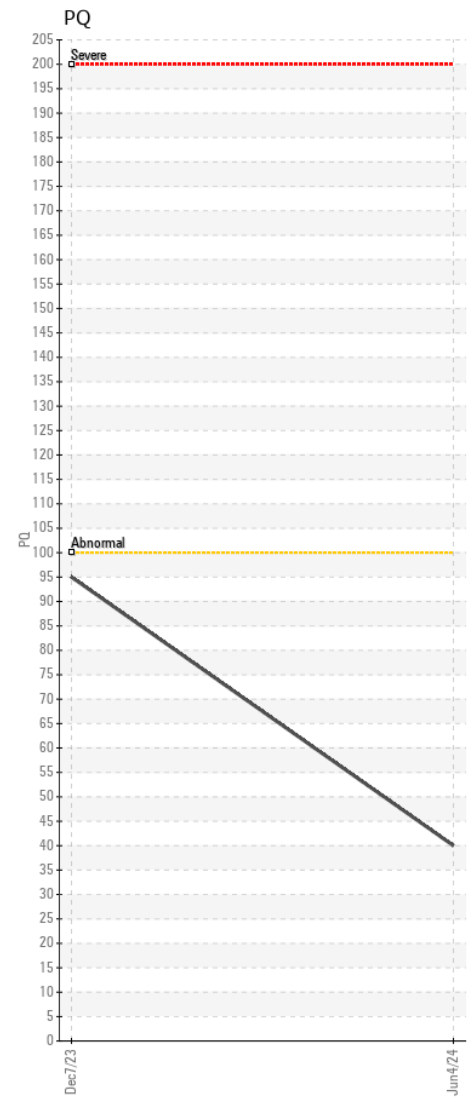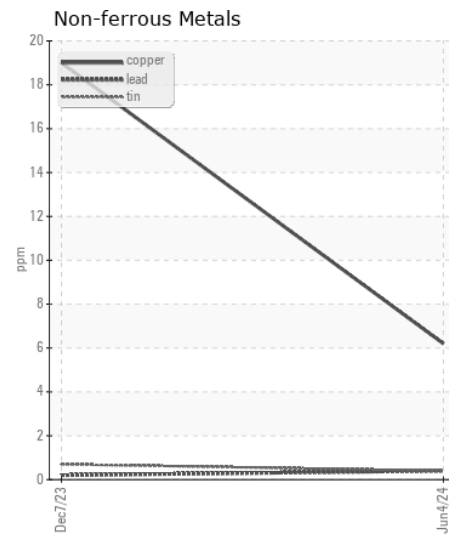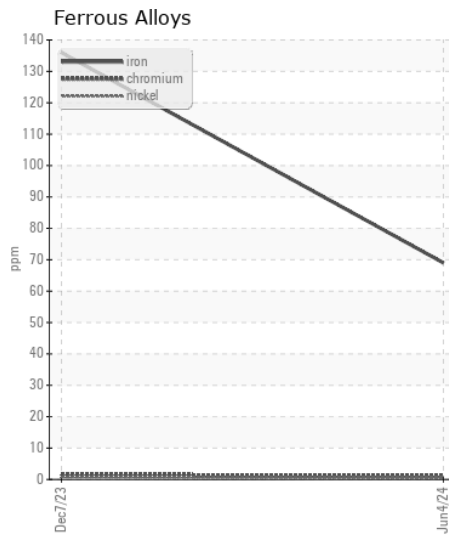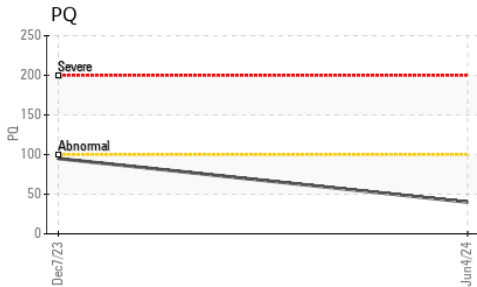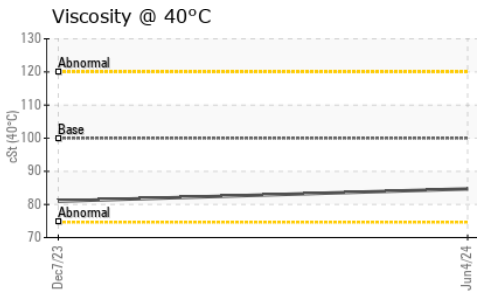

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : JR0218690 **Received** : 14 Jun 2024  
**Lab Number** : 06210437 **Tested** : 17 Jun 2024  
**Unique Number** : 11083301 **Diagnosed** : 17 Jun 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: PQ )

**JRE - ASHEVILLE**  
 101 BRUCE DRIVE  
 ASHEVILLE, NC  
 US 28806

Contact: Randy Warren  
 randy.warren@jamesriverequipment.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (528)667-0176  
 F: (828)667-4865