



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**Store 4 - Fairmont [RO# 151854]**  
Machine Id  
**JOHN DEERE 750L 1T0750LXHPF445779**  
Component  
**Left Outer Final Drive**  
Fluid  
**JOHN DEERE HY-GARD HYD/TRANS (4 GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LEC0048368</b>	LEC0042889	---
Sample Date		Client Info		<b>11 Jun 2024</b>	15 Aug 2023	---
Machine Age	hrs	Client Info		<b>1020</b>	511	---
Oil Age	hrs	Client Info		<b>1020</b>	511	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	Not Changd	---
Filter Changed		Client Info		<b>N/A</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---

## WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	<b>85</b>	150	---
Iron	ppm	ASTM D5185m	>750	<b>82</b>	77	---
Chromium	ppm	ASTM D5185m	>9	<b>&lt;1</b>	<1	---
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>40	<b>1</b>	5	---
Lead	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	---
Copper	ppm	ASTM D5185m	>40	<b>1</b>	0	---
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>MODER</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

## CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	<b>8</b>	13	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	2	---
Water		WC Method	>0.075	<b>NEG</b>	NEG	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.075	<b>NEG</b>	NEG	---

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	<b>&lt;1</b>	2	---
Boron	ppm	ASTM D5185m	6	<b>3</b>	1	---
Barium	ppm	ASTM D5185m	0	<b>6</b>	4	---
Molybdenum	ppm	ASTM D5185m	0	<b>1</b>	0	---
Manganese	ppm	ASTM D5185m		<b>1</b>	1	---
Magnesium	ppm	ASTM D5185m	145	<b>107</b>	117	---
Calcium	ppm	ASTM D5185m	3570	<b>3480</b>	3674	---
Phosphorus	ppm	ASTM D5185m	1290	<b>1026</b>	1109	---
Zinc	ppm	ASTM D5185m	1640	<b>1287</b>	1395	---
Sulfur	ppm	ASTM D5185m		<b>3667</b>	4621	---
Visc @ 40°C	cSt	ASTM D445	57.0	<b>54.5</b>	56.9	---

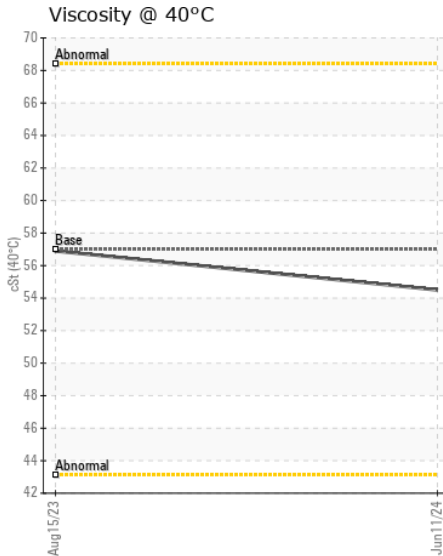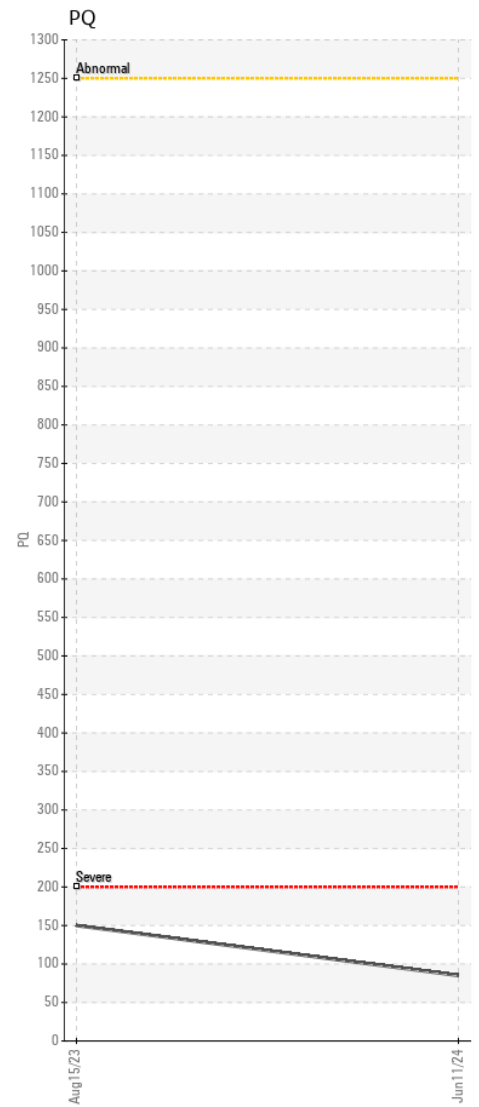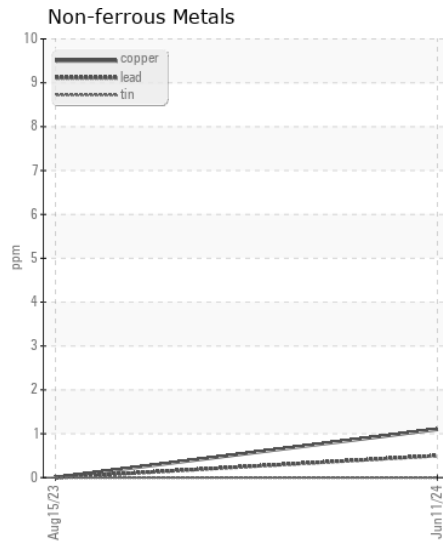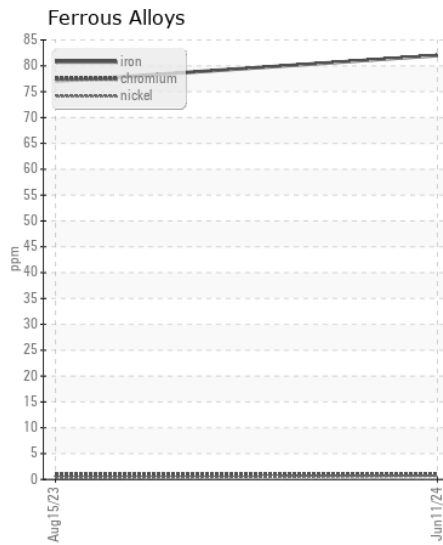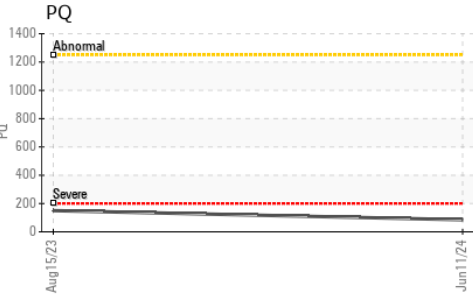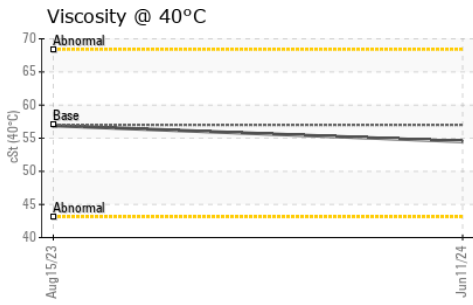

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : LEC0048368 **Received** : 14 Jun 2024  
**Lab Number** : 06210454 **Tested** : 17 Jun 2024  
**Unique Number** : 11083318 **Diagnosed** : 17 Jun 2024 - Wes Davis  
**Test Package** : CONST ( Additional Tests: PQ )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

**LESLIE EQUIPMENT COMPANY**  
 105 TENNIS CENTER DR.  
 MARIETTA, OH  
 US 45750-9765  
 Contact: LEANNE KENDALL  
 KendalLeanne@lec1.com

T: (740)373-5570