



# VOLVO PENTA

## OIL ANALYSIS REPORT

|                 |        |
|-----------------|--------|
| WEAR            | NORMAL |
| CONTAMINATION   | NORMAL |
| FLUID CONDITION | NORMAL |

Area

**JIM JONES 48 SABRE [73450]**

Machine Id

**VOLVO PENTA 3590006326 (S/N 3950006326)**

Component

**Port IPS**

Fluid

**GEAR OIL SAE 75W90 (5 GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

| Test           | UOM | Method      | Limit/Abn | Current     | History1 | History2 |
|----------------|-----|-------------|-----------|-------------|----------|----------|
| Sample Number  |     | Client Info |           | VPA055328   | ---      | ---      |
| Sample Date    |     | Client Info |           | 05 Jun 2024 | ---      | ---      |
| Machine Age    | hrs | Client Info |           | 212         | ---      | ---      |
| Oil Age        | hrs | Client Info |           | 25          | ---      | ---      |
| Filter Age     | hrs | Client Info |           | 0           | ---      | ---      |
| Oil Changed    |     | Client Info |           | Not Changd  | ---      | ---      |
| Filter Changed |     | Client Info |           | Not Changd  | ---      | ---      |
| Sample Status  |     |             |           | NORMAL      | ---      | ---      |

### WEAR

All component wear rates are normal.

|              |        |             |      |      |     |     |
|--------------|--------|-------------|------|------|-----|-----|
| PQ           |        | ASTM D8184  |      | 16   | --- | --- |
| Iron         | ppm    | ASTM D5185m | >275 | 3    | --- | --- |
| Chromium     | ppm    | ASTM D5185m | >4   | <1   | --- | --- |
| Nickel       | ppm    | ASTM D5185m | >4   | <1   | --- | --- |
| Titanium     | ppm    | ASTM D5185m | >3   | <1   | --- | --- |
| Silver       | ppm    | ASTM D5185m |      | 0    | --- | --- |
| Aluminum     | ppm    | ASTM D5185m | >10  | 1    | --- | --- |
| Lead         | ppm    | ASTM D5185m | >4   | <1   | --- | --- |
| Copper       | ppm    | ASTM D5185m | >30  | <1   | --- | --- |
| Tin          | ppm    | ASTM D5185m | >3   | <1   | --- | --- |
| Vanadium     | ppm    | ASTM D5185m |      | 0    | --- | --- |
| White Metal  | scalar | *Visual     | NONE | NONE | --- | --- |
| Yellow Metal | scalar | *Visual     | NONE | NONE | --- | --- |

### CONTAMINATION











There is no indication of any contamination in the oil.

|                  |        |             |       |       |     |     |
|------------------|--------|-------------|-------|-------|-----|-----|
| Silicon          | ppm    | ASTM D5185m | >35   | 1     | --- | --- |
| Potassium        | ppm    | ASTM D5185m | >20   | 1     | --- | --- |
| Water            |        | WC Method   | >0.2  | NEG   | --- | --- |
| Silt             | scalar | *Visual     | NONE  | NONE  | --- | --- |
| Debris           | scalar | *Visual     | NONE  | NONE  | --- | --- |
| Sand/Dirt        | scalar | *Visual     | NONE  | NONE  | --- | --- |
| Appearance       | scalar | *Visual     | NORML | NORML | --- | --- |
| Odor             | scalar | *Visual     | NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual     | >0.2  | NEG   | --- | --- |

### FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

|             |     |             |       |       |     |     |
|-------------|-----|-------------|-------|-------|-----|-----|
| Sodium      | ppm | ASTM D5185m |       | <1    | --- | --- |
| Boron       | ppm | ASTM D5185m | 400   | 315   | --- | --- |
| Barium      | ppm | ASTM D5185m | 200   | 0     | --- | --- |
| Molybdenum  | ppm | ASTM D5185m | 12    | <1    | --- | --- |
| Manganese   | ppm | ASTM D5185m |       | <1    | --- | --- |
| Magnesium   | ppm | ASTM D5185m | 12    | 23    | --- | --- |
| Calcium     | ppm | ASTM D5185m | 150   | 0     | --- | --- |
| Phosphorus  | ppm | ASTM D5185m | 1650  | 1281  | --- | --- |
| Zinc        | ppm | ASTM D5185m | 125   | 5     | --- | --- |
| Sulfur      | ppm | ASTM D5185m | 22500 | 22741 | --- | --- |
| Visc @ 40°C | cSt | ASTM D445   | 109   | 107   | --- | --- |

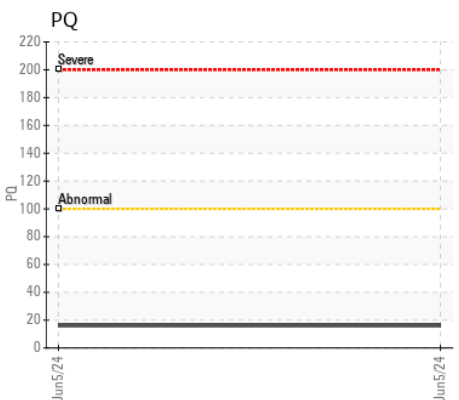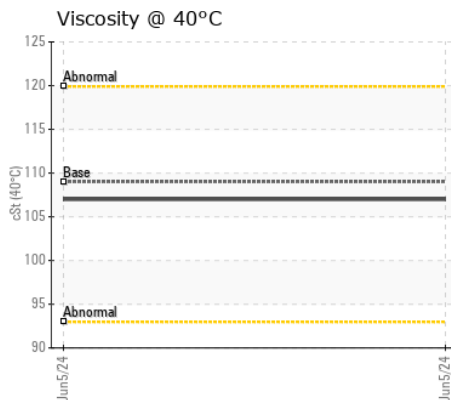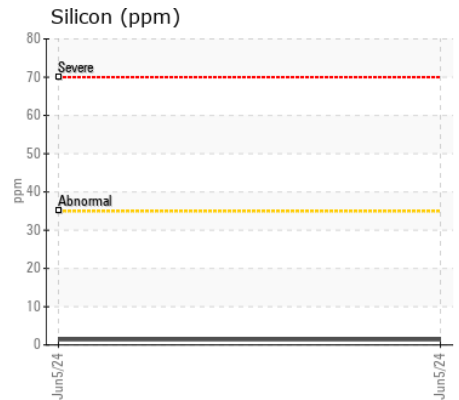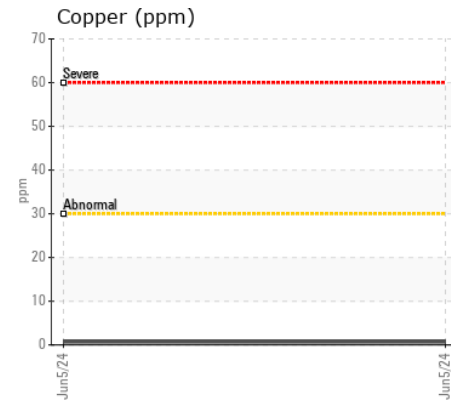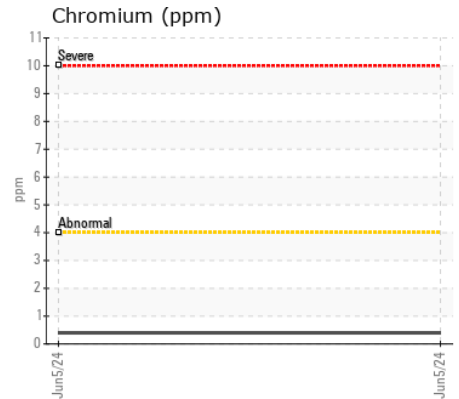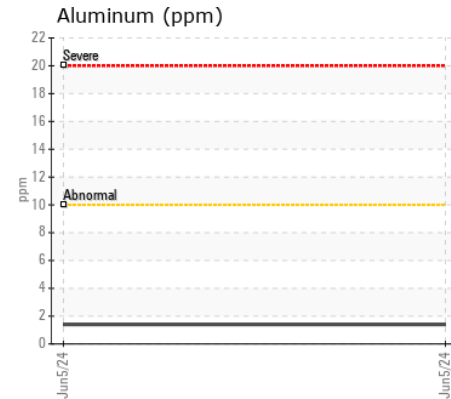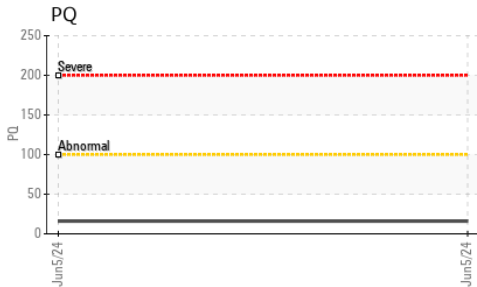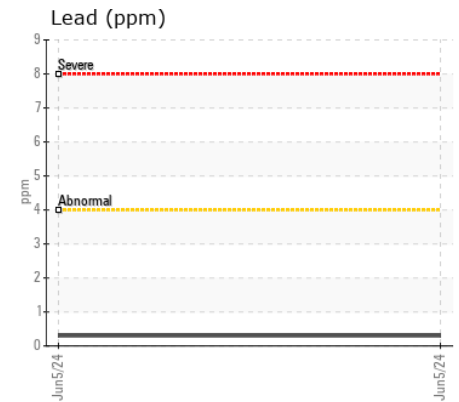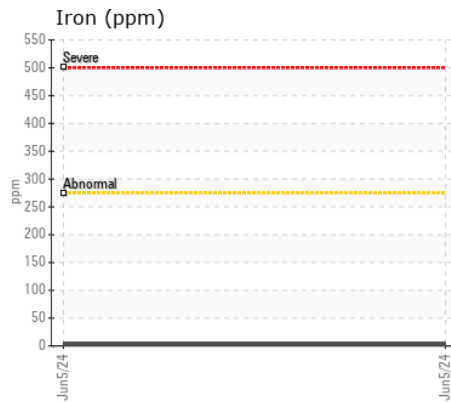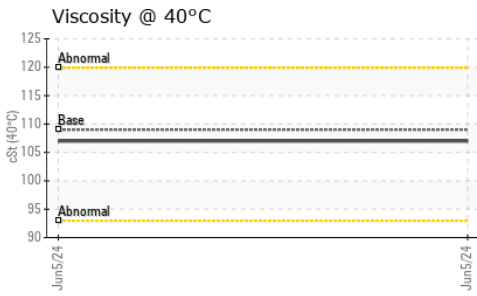

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : VPA055328

**Lab Number** : 06210465

**Unique Number** : 11083329

**Test Package** : MOB 1 ( Additional Tests: PQ )

**Received** : 14 Jun 2024

**Tested** : 17 Jun 2024

**Diagnosed** : 18 Jun 2024 - Angela Borella

**Maritime Fabrications Inc**

920 W Pearle Jensen Way, 920 W. Pearle Jensen Way

LACONNER, WA

US 98257

Contact: Mark Crandall

markc@laconnermaritime.com

T: (360)466-3629

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)