



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[SWA536475-10]
 Machine Id
VOLVO L220H 2823
 Component
Rear Axle
 Fluid
VOLVO WB 102 (--- GAL)



RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP430297	VCP419118	VCP364974
Sample Date		Client Info		10 Jun 2024	09 Sep 2023	16 Sep 2022
Machine Age	hrs	Client Info		10963	9460	7531
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Not Changd	Not Changd
Filter Changed		Client Info		Changed	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	216	150	69
Chromium	ppm	ASTM D5185m	>20	3	2	<1
Nickel	ppm	ASTM D5185m	>10	1	<1	<1
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>30	1	3	<1
Lead	ppm	ASTM D5185m	>50	<1	0	<1
Copper	ppm	ASTM D5185m	>120	7	3	<1
Tin	ppm	ASTM D5185m	>20	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	12	12	7
Potassium	ppm	ASTM D5185m	>20	2	<1	0
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	LIGHT	MODER
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		4	5	4
Boron	ppm	ASTM D5185m		96	100	89
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		2	1	<1
Manganese	ppm	ASTM D5185m		3	2	1
Magnesium	ppm	ASTM D5185m		16	2	13
Calcium	ppm	ASTM D5185m		2977	3107	2677
Phosphorus	ppm	ASTM D5185m		1102	1110	986
Zinc	ppm	ASTM D5185m		1326	1356	1237
Sulfur	ppm	ASTM D5185m		4635	5079	3806
Visc @ 40°C	cSt	ASTM D445	55	39.5	39.9	40.3

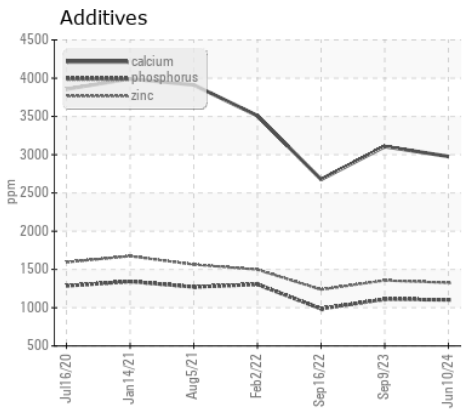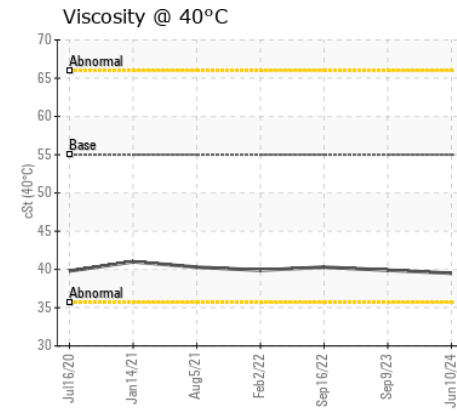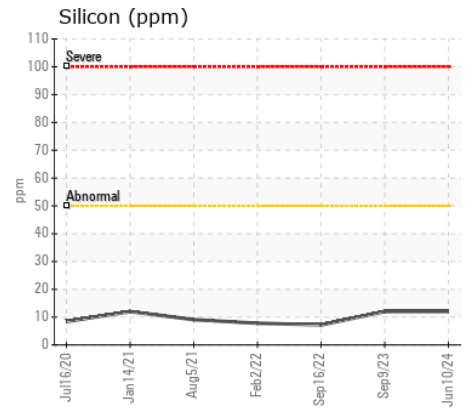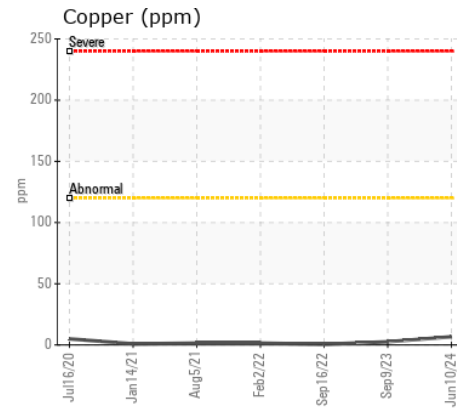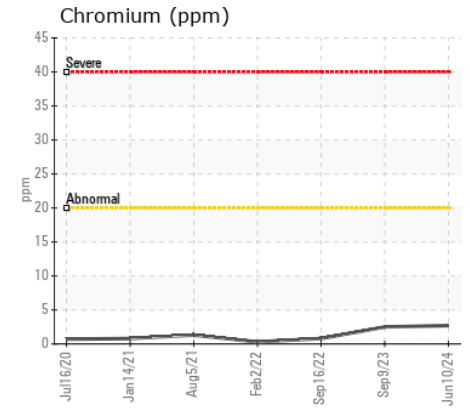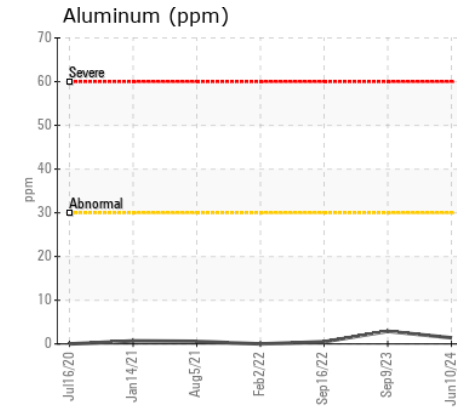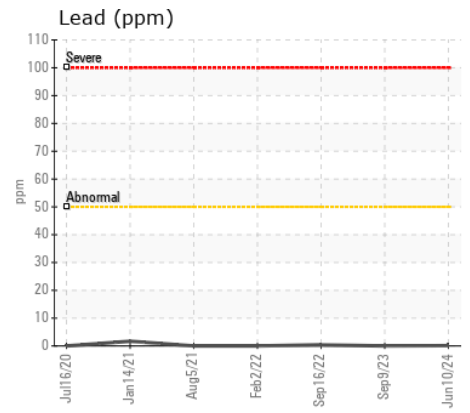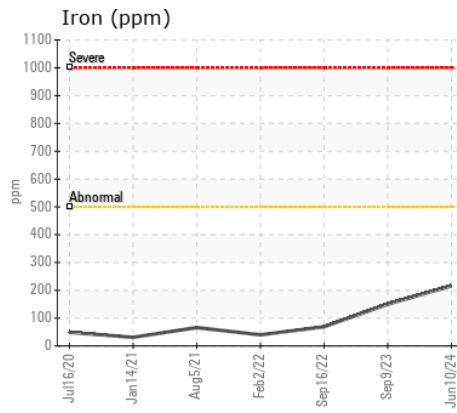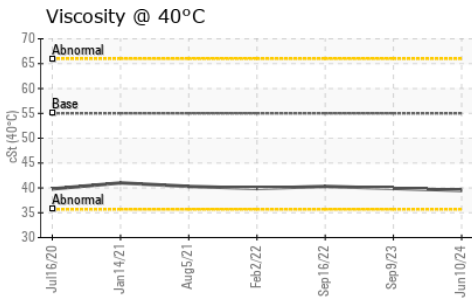

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP430297
Lab Number : 06210475
Unique Number : 11083339
Test Package : MOB 1

Received : 14 Jun 2024
Tested : 17 Jun 2024
Diagnosed : 17 Jun 2024 - Wes Davis

CALLANAN
 RT 32 677 FLATBUSH RD
 EAST KINGSTON, NY
 US 12401
 Contact:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: