



# VOLVO

## OIL ANALYSIS REPORT

|                 |        |
|-----------------|--------|
| WEAR            | NORMAL |
| CONTAMINATION   | NORMAL |
| FLUID CONDITION | NORMAL |



Area  
**[HERC RENTAL]**  
 Machine Id  
**VOLVO A30G 752902**  
 Component  
**Drop Box**  
 Fluid  
**VOLVO PREMIUM GEAR OIL 85W-140 GL-5 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

| Test           | UOM | Method      | Limit/Abn | Current     | History1 | History2 |
|----------------|-----|-------------|-----------|-------------|----------|----------|
| Sample Number  |     | Client Info |           | VCP437067   | ---      | ---      |
| Sample Date    |     | Client Info |           | 29 Apr 2024 | ---      | ---      |
| Machine Age    | hrs | Client Info |           | 2093        | ---      | ---      |
| Oil Age        | hrs | Client Info |           | 0           | ---      | ---      |
| Filter Age     | hrs | Client Info |           | 0           | ---      | ---      |
| Oil Changed    |     | Client Info |           | Not Changed | ---      | ---      |
| Filter Changed |     | Client Info |           | Not Changed | ---      | ---      |
| Sample Status  |     |             |           | NORMAL      | ---      | ---      |

### WEAR

All component wear rates are normal.

|              |        |             |      |      |     |     |
|--------------|--------|-------------|------|------|-----|-----|
| Iron         | ppm    | ASTM D5185m | >500 | 98   | --- | --- |
| Chromium     | ppm    | ASTM D5185m | >20  | 1    | --- | --- |
| Nickel       | ppm    | ASTM D5185m | >10  | <1   | --- | --- |
| Titanium     | ppm    | ASTM D5185m |      | <1   | --- | --- |
| Silver       | ppm    | ASTM D5185m |      | 0    | --- | --- |
| Aluminum     | ppm    | ASTM D5185m | >30  | 9    | --- | --- |
| Lead         | ppm    | ASTM D5185m | >30  | <1   | --- | --- |
| Copper       | ppm    | ASTM D5185m | >30  | 2    | --- | --- |
| Tin          | ppm    | ASTM D5185m | >20  | <1   | --- | --- |
| Vanadium     | ppm    | ASTM D5185m |      | 0    | --- | --- |
| White Metal  | scalar | *Visual     | NONE | NONE | --- | --- |
| Yellow Metal | scalar | *Visual     | NONE | NONE | --- | --- |

### CONTAMINATION










There is no indication of any contamination in the oil.

|                  |        |             |       |       |     |     |
|------------------|--------|-------------|-------|-------|-----|-----|
| Silicon          | ppm    | ASTM D5185m | >50   | 33    | --- | --- |
| Potassium        | ppm    | ASTM D5185m | >20   | 2     | --- | --- |
| Water            |        | WC Method   | >0.2  | NEG   | --- | --- |
| Silt             | scalar | *Visual     | NONE  | NONE  | --- | --- |
| Debris           | scalar | *Visual     | NONE  | NONE  | --- | --- |
| Sand/Dirt        | scalar | *Visual     | NONE  | NONE  | --- | --- |
| Appearance       | scalar | *Visual     | NORML | NORML | --- | --- |
| Odor             | scalar | *Visual     | NORML | NORML | --- | --- |
| Emulsified Water | scalar | *Visual     | >0.2  | NEG   | --- | --- |

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

|             |     |             |       |       |     |     |
|-------------|-----|-------------|-------|-------|-----|-----|
| Sodium      | ppm | ASTM D5185m |       | 5     | --- | --- |
| Boron       | ppm | ASTM D5185m | 111   | 148   | --- | --- |
| Barium      | ppm | ASTM D5185m | 0.0   | <1    | --- | --- |
| Molybdenum  | ppm | ASTM D5185m | 0.9   | 10    | --- | --- |
| Manganese   | ppm | ASTM D5185m | 0.0   | 2     | --- | --- |
| Magnesium   | ppm | ASTM D5185m | 39    | 4     | --- | --- |
| Calcium     | ppm | ASTM D5185m | 93    | 107   | --- | --- |
| Phosphorus  | ppm | ASTM D5185m | 920   | 2037  | --- | --- |
| Zinc        | ppm | ASTM D5185m | 104   | 88    | --- | --- |
| Sulfur      | ppm | ASTM D5185m | 20179 | 26600 | --- | --- |
| Visc @ 40°C | cSt | ASTM D445   | 333   | 60.3  | --- | --- |

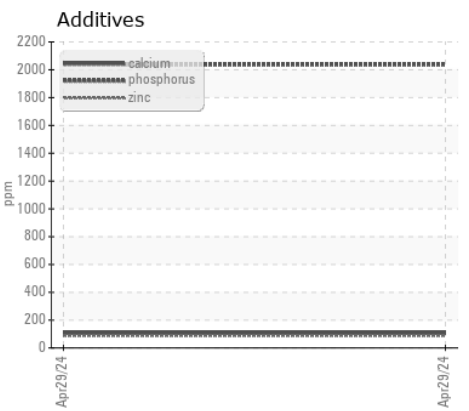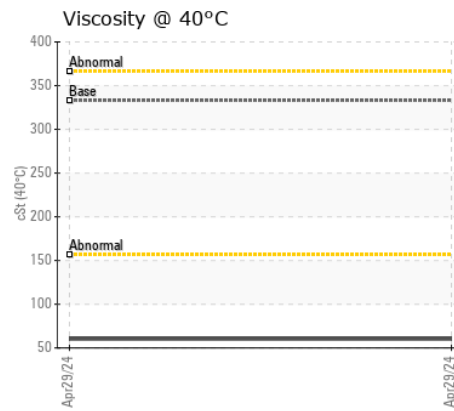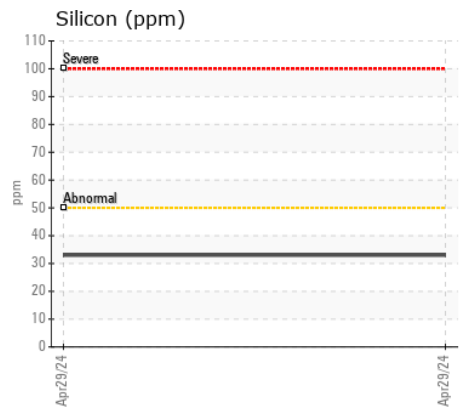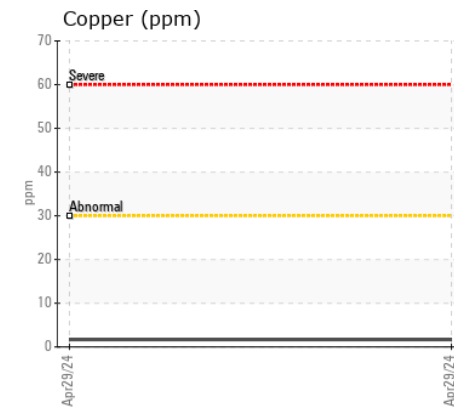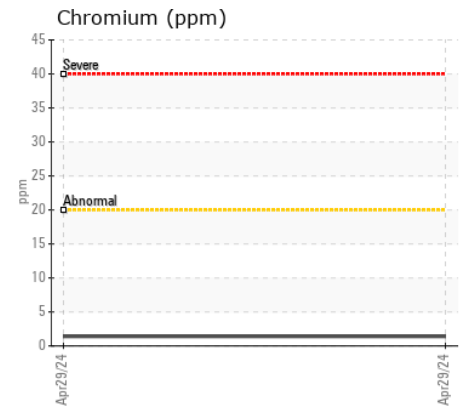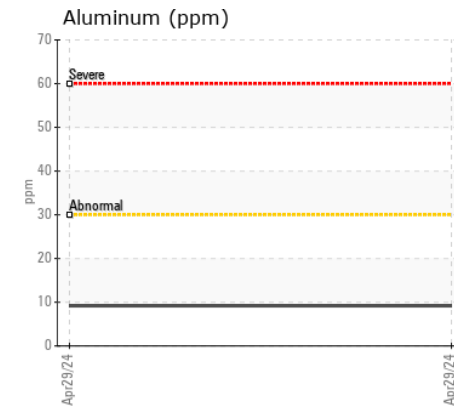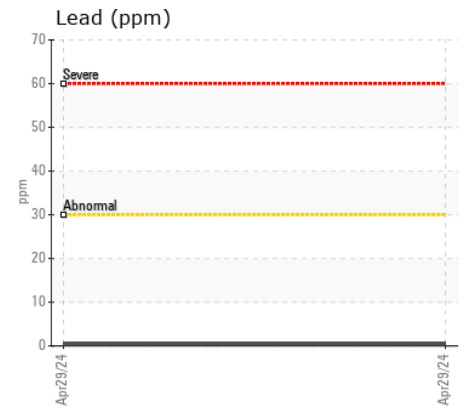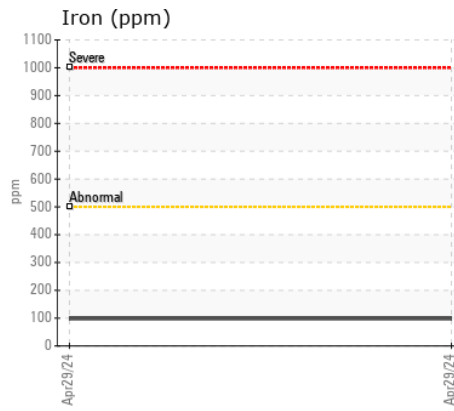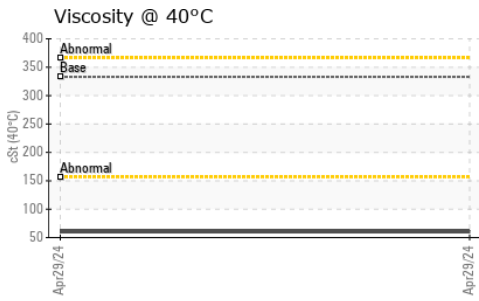

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP437067  
**Lab Number** : 06210490  
**Unique Number** : 11083354  
**Test Package** : MOB 1

**Received** : 14 Jun 2024  
**Tested** : 17 Jun 2024  
**Diagnosed** : 18 Jun 2024 - Sean Felton

ALTA EQUIPMENT/FLAGLER CONSTRUCTION EQUIPMENT LLC  
 8418 PALM RIVER ROAD  
 TAMPA, FL  
 US 33619  
 Contact: KENNY HANEY  
 khaney@flaglerce.com  
 T: (813)630-0077  
 F: (813)630-2233

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)