



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
015-0064 (S/N 236017)
 Component
Rear Right Final Drive
 Fluid
SCHAEFFER 267 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. (Customer Sample Comment: Right rear final drive sample)

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0868280	WC0815100	WC0814957
Sample Date		Client Info		10 Jun 2024	02 Oct 2023	18 Jul 2023
Machine Age	hrs	Client Info		10189	9217	8857
Oil Age	hrs	Client Info		1121	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		N/A	Not Changd	Not Changd
Filter Changed		Client Info		N/A	Not Changd	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	31	35	27
Chromium	ppm	ASTM D5185m	>10	<1	<1	<1
Nickel	ppm	ASTM D5185m	>10	<1	<1	<1
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	4	3	1
Lead	ppm	ASTM D5185m	>25	3	4	3
Copper	ppm	ASTM D5185m	>50	12	14	12
Tin	ppm	ASTM D5185m	>10	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	9	10	8
Potassium	ppm	ASTM D5185m	>20	2	3	3
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	1	3
Boron	ppm	ASTM D5185m		38	42	46
Barium	ppm	ASTM D5185m		2	3	0
Molybdenum	ppm	ASTM D5185m		342	414	365
Manganese	ppm	ASTM D5185m		<1	<1	1
Magnesium	ppm	ASTM D5185m		9	11	5
Calcium	ppm	ASTM D5185m		10	24	16
Phosphorus	ppm	ASTM D5185m		1120	1351	1267
Zinc	ppm	ASTM D5185m		21	23	4
Sulfur	ppm	ASTM D5185m		22205	26938	28212
Visc @ 40°C	cSt	ASTM D445	220	113	112	113

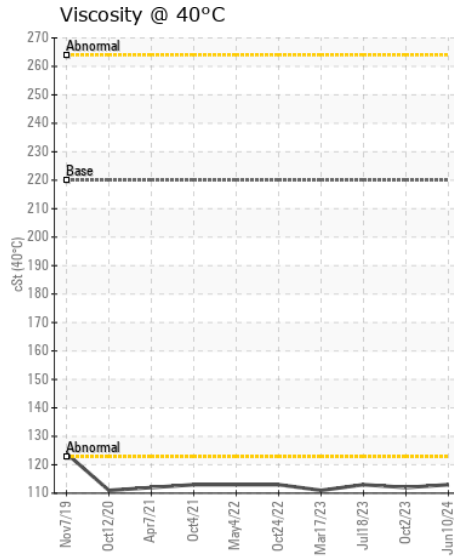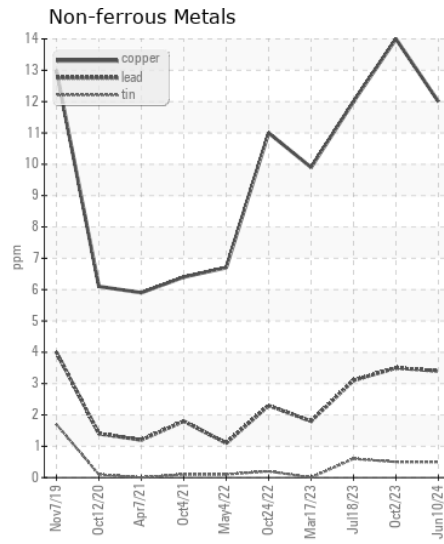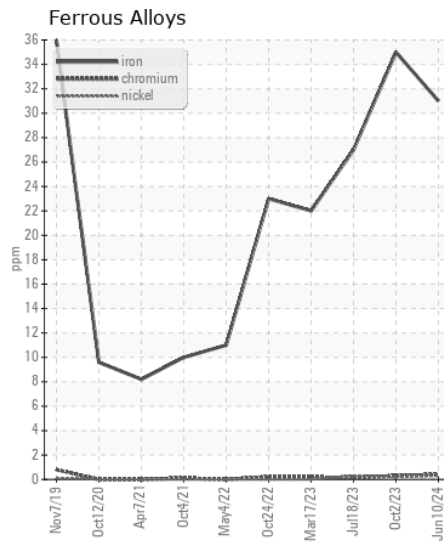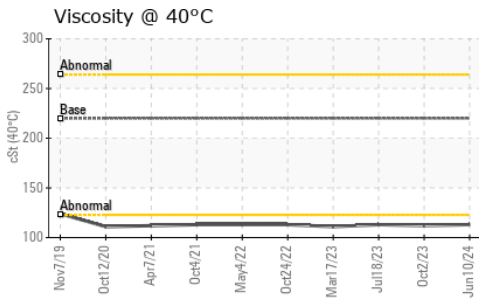

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0868280
Lab Number : 06210519
Unique Number : 11083383
Test Package : CONST
Received : 14 Jun 2024
Tested : 17 Jun 2024
Diagnosed : 18 Jun 2024 - Sean Felton

SHIMMICK CONSTRUCTION
 5535 TRAILHEAD DRIVE
 CHATTANOOGA, TN
 US 37415
 Contact: DANIEL LISELLA
 daniel.lisella@shimmick.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: