



OIL ANALYSIS REPORT

WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
015-0064 (S/N 236017)
 Component
Front Hoist
 Fluid
SCHAEFFER 267 80W90 (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor. (Customer Sample Comment: Front Hoist sample)

WEAR

Moderate concentration of visible metal present. All component wear rates are normal.





CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0868301	WC0814961	---
Sample Date		Client Info		10 Jun 2024	18 Jul 2023	---
Machine Age	hrs	Client Info		10189	8857	---
Oil Age	hrs	Client Info		10101	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		N/A	Not Changd	---
Filter Changed		Client Info		N/A	Not Changd	---
Sample Status				ABNORMAL	ABNORMAL	---
Iron	ppm	ASTM D5185m	>300	32	24	---
Chromium	ppm	ASTM D5185m	>5	<1	<1	---
Nickel	ppm	ASTM D5185m	>4	<1	<1	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m		0	<1	---
Aluminum	ppm	ASTM D5185m	>10	3	<1	---
Lead	ppm	ASTM D5185m	>120	0	0	---
Copper	ppm	ASTM D5185m	>200	142	105	---
Tin	ppm	ASTM D5185m	>15	1	1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	▲ MODER	▲ MODER	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---
Silicon	ppm	ASTM D5185m	>75	8	6	---
Potassium	ppm	ASTM D5185m	>20	2	2	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---
Sodium	ppm	ASTM D5185m		1	2	---
Boron	ppm	ASTM D5185m		60	75	---
Barium	ppm	ASTM D5185m		2	0	---
Molybdenum	ppm	ASTM D5185m		405	406	---
Manganese	ppm	ASTM D5185m		<1	<1	---
Magnesium	ppm	ASTM D5185m		3	0	---
Calcium	ppm	ASTM D5185m		80	63	---
Phosphorus	ppm	ASTM D5185m		1023	1123	---
Zinc	ppm	ASTM D5185m		59	31	---
Sulfur	ppm	ASTM D5185m		19314	24564	---
Visc @ 40°C	cSt	ASTM D445	220	103	104	---

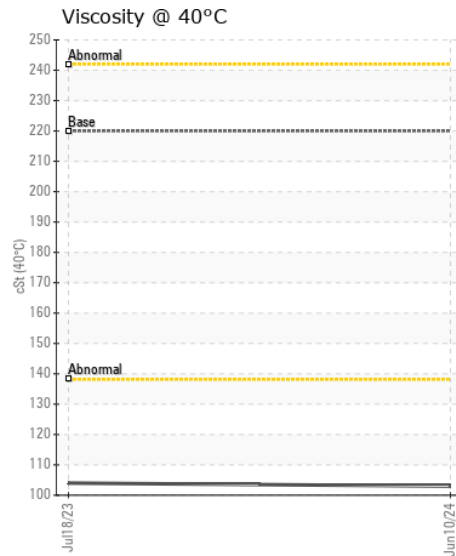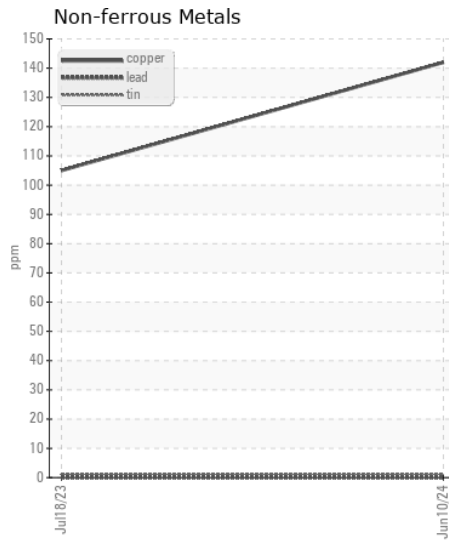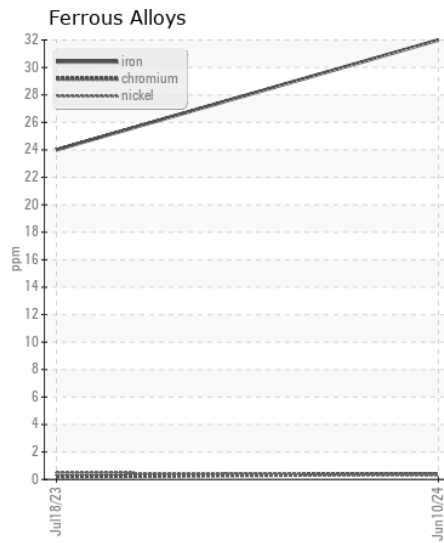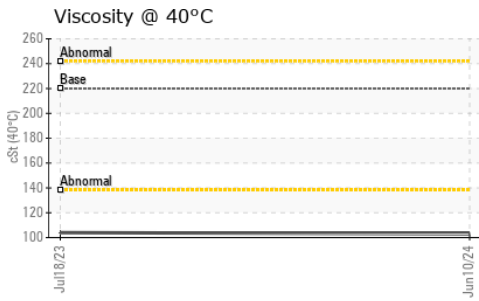

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0868301
Lab Number : 06210521
Unique Number : 11083385
Test Package : CONST
Received : 14 Jun 2024
Tested : 17 Jun 2024
Diagnosed : 18 Jun 2024 - Sean Felton

SHIMMICK CONSTRUCTION
 5535 TRAILHEAD DRIVE
 CHATTANOOGA, TN
 US 37415
 Contact: DANIEL LISELLA
 daniel.lisella@shimmick.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: