



ASCENDUM

OIL ANALYSIS REPORT

WEAR **NORMAL**

CONTAMINATION **NORMAL**

FLUID CONDITION **NORMAL**



Area
Ascendum Machinery/500 Hour CSA
 Machine Id
VOLVO A40G 2305 (S/N 353314)
 Component
Rear Axle
 Fluid
NOT GIVEN (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

WEAR

All component wear rates are normal.

CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION





The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0009799	ASC0007463	---
Sample Date		Client Info		12 Jun 2024	08 Feb 2024	---
Machine Age	hrs	Client Info		1936	1472	---
Oil Age	hrs	Client Info		1936	1472	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Not Changd	Not Changd	---
Filter Changed		Client Info		None	N/A	---
Sample Status				NORMAL	NORMAL	---

Iron	ppm	ASTM D5185m	>900	175	184	---
Chromium	ppm	ASTM D5185m	>20	2	3	---
Nickel	ppm	ASTM D5185m	>10	<1	<1	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>30	3	0	---
Lead	ppm	ASTM D5185m	>50	0	0	---
Copper	ppm	ASTM D5185m	>150	3	<1	---
Tin	ppm	ASTM D5185m	>20	0	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

Silicon	ppm	ASTM D5185m	>50	3	4	---
Potassium	ppm	ASTM D5185m	>20	4	4	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	MODER	MODER	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

Sodium	ppm	ASTM D5185m		4	3	---
Boron	ppm	ASTM D5185m		315	260	---
Barium	ppm	ASTM D5185m		<1	0	---
Molybdenum	ppm	ASTM D5185m		2	1	---
Manganese	ppm	ASTM D5185m		7	8	---
Magnesium	ppm	ASTM D5185m		2	2	---
Calcium	ppm	ASTM D5185m		69	16	---
Phosphorus	ppm	ASTM D5185m		2412	2223	---
Zinc	ppm	ASTM D5185m		42	<1	---
Sulfur	ppm	ASTM D5185m		31374	25281	---
Visc @ 40°C	cSt	ASTM D445		51.7	51.9	---

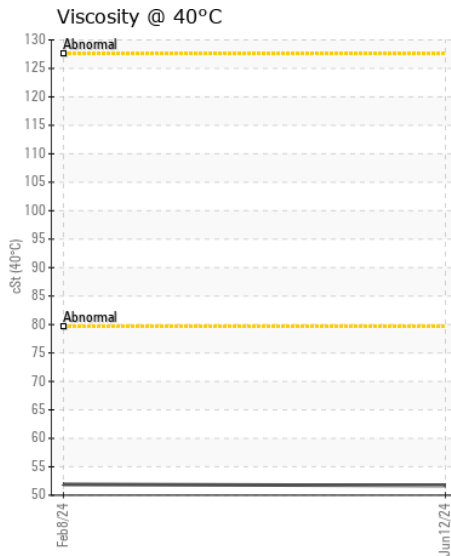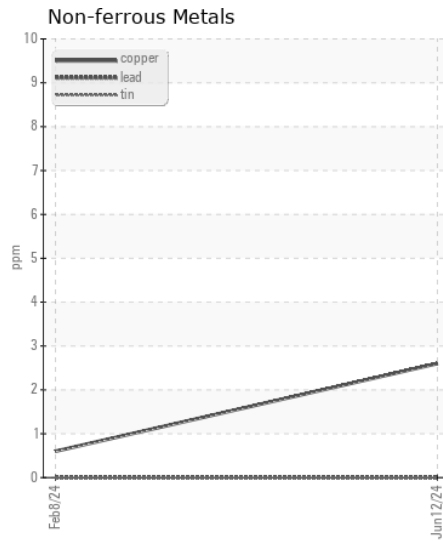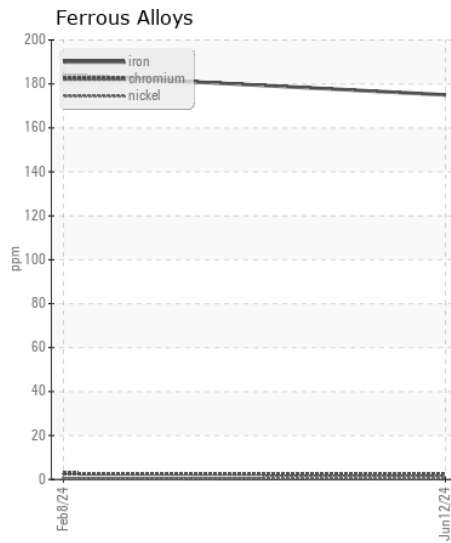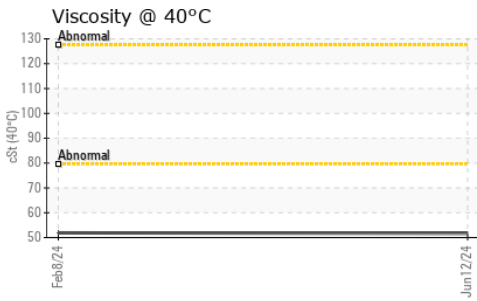

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0009799
Lab Number : 06210556
Unique Number : 11083420
Test Package : CONST

Received : 14 Jun 2024
Tested : 17 Jun 2024
Diagnosed : 17 Jun 2024 - Wes Davis

TRIANGLE GRADING AND PAVING INC
 1521 Huffman Mill Rd
 BURLINGTON, NC
 US 27216

Contact: KAREN HILLIARD
 khilliard@trianglegradingpaving.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (336)584-1745
 F: (336)584-0145