



ASCENDUM

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area

Ascendum Machinery

Machine Id

VOLVO L180H 5676

Component

Transmission (Auto)

Fluid

VOLVO AUTOMATIC TRANSMISSION FLUID AT102 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		ASC0009834	ASC0007059	---
Sample Date		Client Info		12 Jun 2024	09 Apr 2024	---
Machine Age	hrs	Client Info		967	453	---
Oil Age	hrs	Client Info		967	453	---
Filter Age	hrs	Client Info		0	453	---
Oil Changed		Client Info		Not Changd	Not Changd	---
Filter Changed		Client Info		Not Changd	Not Changd	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>160	17	16	---
Chromium	ppm	ASTM D5185m	>5	<1	0	---
Nickel	ppm	ASTM D5185m	>5	0	0	---
Titanium	ppm	ASTM D5185m		0	0	---
Silver	ppm	ASTM D5185m	>5	0	0	---
Aluminum	ppm	ASTM D5185m	>50	3	0	---
Lead	ppm	ASTM D5185m	>50	<1	0	---
Copper	ppm	ASTM D5185m	>225	6	3	---
Tin	ppm	ASTM D5185m	>10	<1	0	---
Vanadium	ppm	ASTM D5185m		0	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION





There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>20	4	7	---
Potassium	ppm	ASTM D5185m	>20	2	0	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		<1	2	---
Boron	ppm	ASTM D5185m	187	90	87	---
Barium	ppm	ASTM D5185m	0.0	5	5	---
Molybdenum	ppm	ASTM D5185m	0.0	<1	0	---
Manganese	ppm	ASTM D5185m	0.0	4	3	---
Magnesium	ppm	ASTM D5185m	6.8	2	2	---
Calcium	ppm	ASTM D5185m	215	71	80	---
Phosphorus	ppm	ASTM D5185m	445	192	215	---
Zinc	ppm	ASTM D5185m	56	19	21	---
Sulfur	ppm	ASTM D5185m	1336	2016	2435	---
Visc @ 40°C	cSt	ASTM D445	35.3	28.5	29.5	---

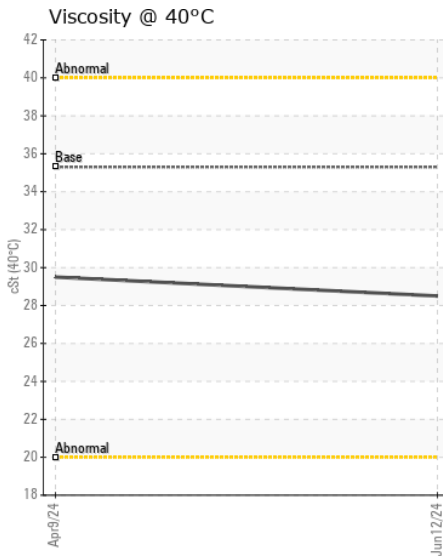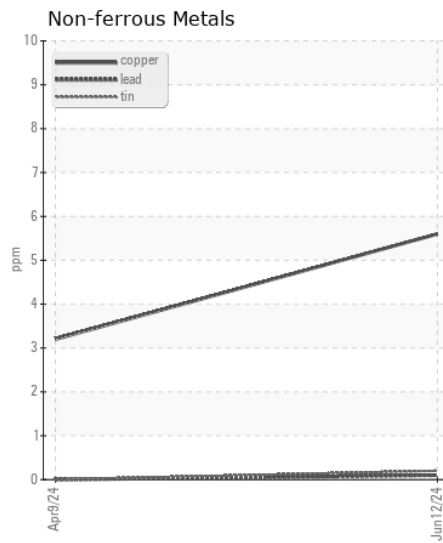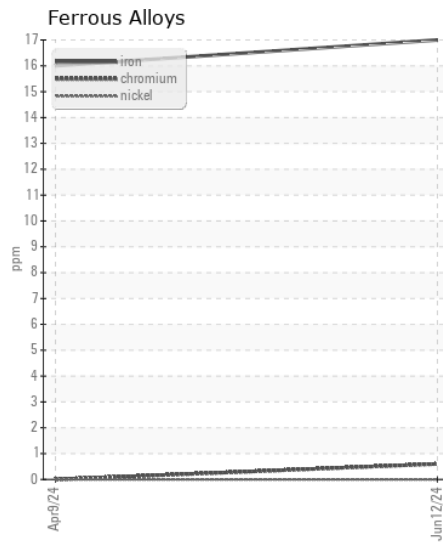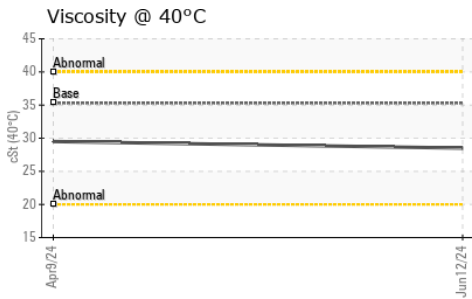

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ASC0009834
Lab Number : 06210595
Unique Number : 11083459
Test Package : CONST

Received : 14 Jun 2024
Tested : 17 Jun 2024
Diagnosed : 17 Jun 2024 - Wes Davis

METAL RECYCLING SERVICES - MONROE
 P.O. BOX 812
 MONROE, NC
 US 28111
 Contact: RYAN BOWDEN

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: (704)238-0755