



# VOLVO

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**VOLVO A40G 752333**  
Component  
**Transmission (Auto)**  
Fluid  
**DEXRON III (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

### WEAR

All component wear rates are normal.










### CONTAMINATION

There is no indication of any contamination in the fluid.

### FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP443014</b>	---	---
Sample Date		Client Info		<b>08 Jun 2024</b>	---	---
Machine Age	hrs	Client Info		<b>697</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>Not Chngd</b>	---	---
Filter Changed		Client Info		<b>Not Chngd</b>	---	---
Sample Status				<b>NORMAL</b>	---	---
<hr/>						
Iron	ppm	ASTM D5185m	>160	<b>11</b>	---	---
Chromium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m	>5	<b>3</b>	---	---
Titanium	ppm	ASTM D5185m		<b>0</b>	---	---
Silver	ppm	ASTM D5185m	>5	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>50	<b>9</b>	---	---
Lead	ppm	ASTM D5185m	>50	<b>&lt;1</b>	---	---
Copper	ppm	ASTM D5185m	>225	<b>23</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>3</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
<hr/>						
Silicon	ppm	ASTM D5185m	>20	<b>8</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	---	---
Water		WC Method	>0.1	<b>NEG</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	---	---
<hr/>						
Sodium	ppm	ASTM D5185m		<b>2</b>	---	---
Boron	ppm	ASTM D5185m		<b>93</b>	---	---
Barium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Manganese	ppm	ASTM D5185m		<b>3</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>1</b>	---	---
Calcium	ppm	ASTM D5185m		<b>66</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>187</b>	---	---
Zinc	ppm	ASTM D5185m		<b>5</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>1830</b>	---	---
Visc @ 40°C	cSt	ASTM D445	35.0	<b>29.5</b>	---	---

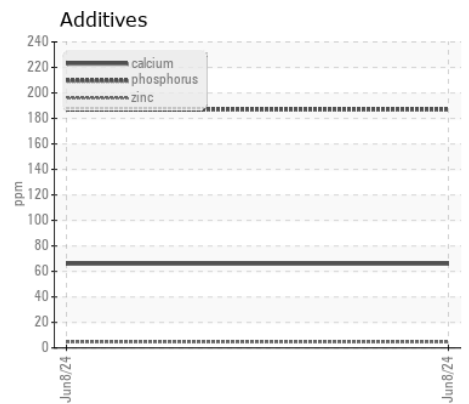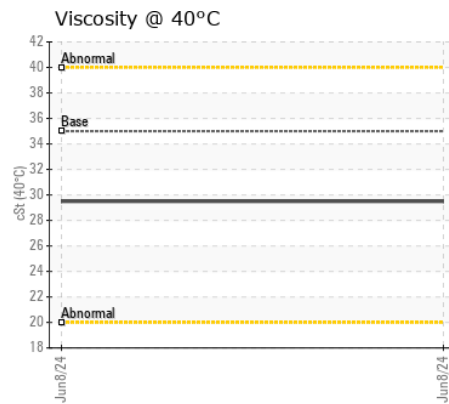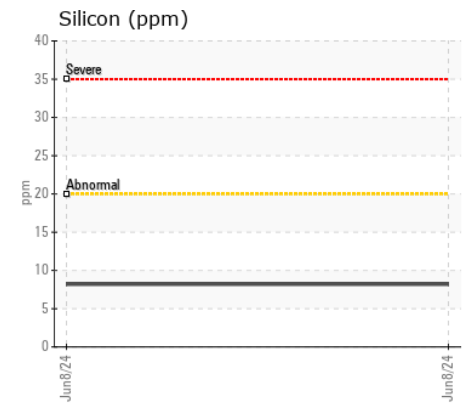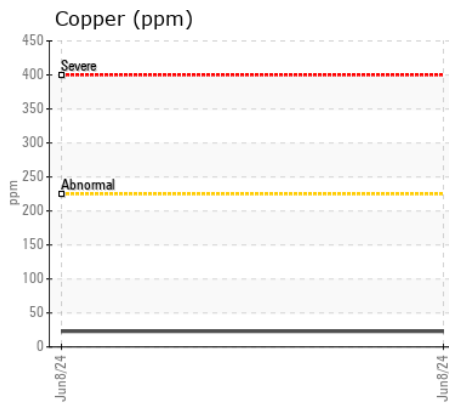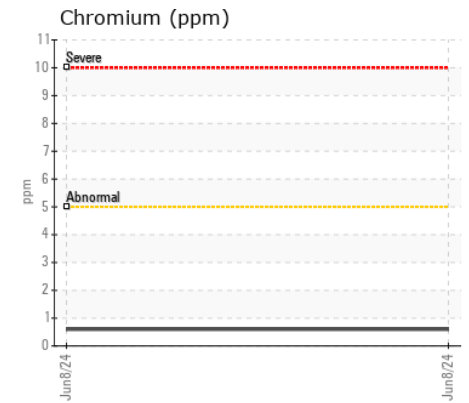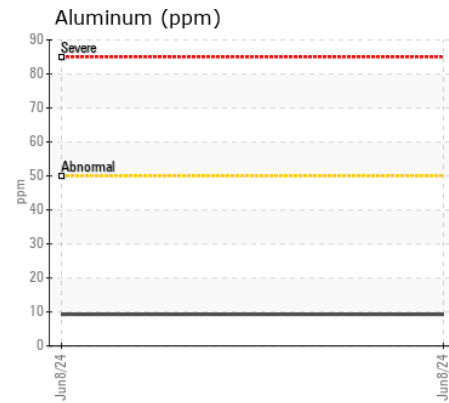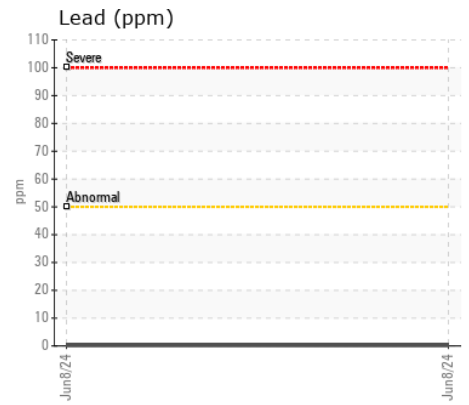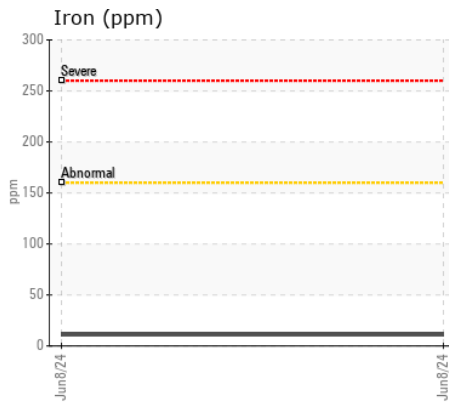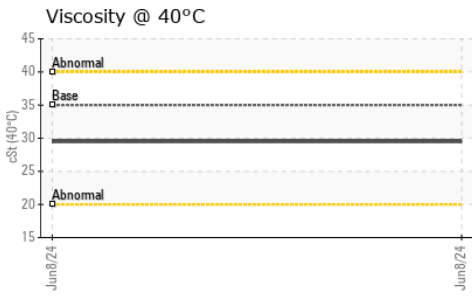

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : VCP443014 **Received** : 14 Jun 2024  
**Lab Number** : 06210603 **Tested** : 17 Jun 2024  
**Unique Number** : 11083467 **Diagnosed** : 17 Jun 2024 - Angela Borella  
**Test Package** : MOB 1

**RIPA AND ASSOCIATES**  
 10149 FISHER AVENUE  
 TAMPA, FL  
 US 33619  
 Contact: ROBERT TURNER  
 rturner@ripatampa.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: