



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
VOLVO L90H 624034

Component
Transmission (Auto)

Fluid
VOLVO AUTOMATIC TRANSMISSION FLUID AT102 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP439781	VCP364495	VCP375710
Sample Date		Client Info		11 Jun 2024	29 Aug 2022	21 Jun 2022
Machine Age	hrs	Client Info		6477	5190	5006
Oil Age	hrs	Client Info		0	0	1500
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	N/A	Not Changed
Filter Changed		Client Info		Not Changed	N/A	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>160	20	55	53
Chromium	ppm	ASTM D5185m	>5	<1	<1	<1
Nickel	ppm	ASTM D5185m	>5	<1	0	<1
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>5	0	<1	0
Aluminum	ppm	ASTM D5185m	>50	3	4	4
Lead	ppm	ASTM D5185m	>50	0	<1	0
Copper	ppm	ASTM D5185m	>225	6	11	8
Tin	ppm	ASTM D5185m	>10	<1	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185m	>20	2	7	7
Potassium	ppm	ASTM D5185m	>20	2	4	0
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		2	0	3
Boron	ppm	ASTM D5185m	187	88	73	67
Barium	ppm	ASTM D5185m	0.0	<1	4	0
Molybdenum	ppm	ASTM D5185m	0.0	<1	1	1
Manganese	ppm	ASTM D5185m	0.0	2	4	4
Magnesium	ppm	ASTM D5185m	6.8	5	21	10
Calcium	ppm	ASTM D5185m	215	94	136	122
Phosphorus	ppm	ASTM D5185m	445	207	198	193
Zinc	ppm	ASTM D5185m	56	33	73	54
Sulfur	ppm	ASTM D5185m	1336	1920	1566	2038
Visc @ 40°C	cSt	ASTM D445	35.3	28.2	28.2	28.4

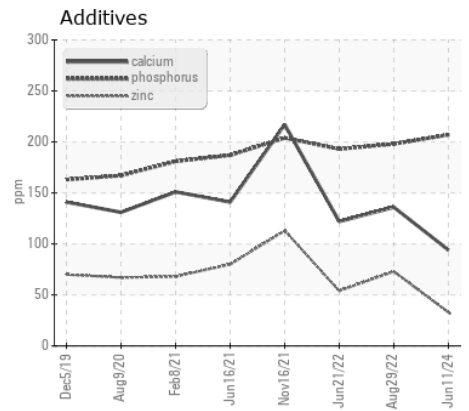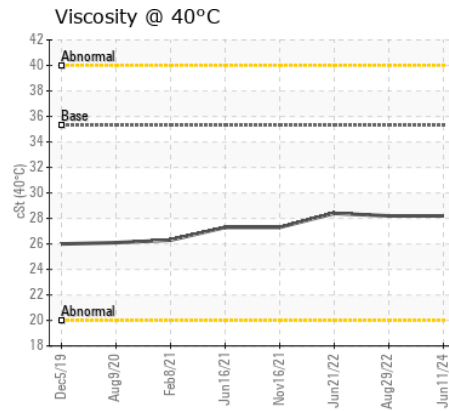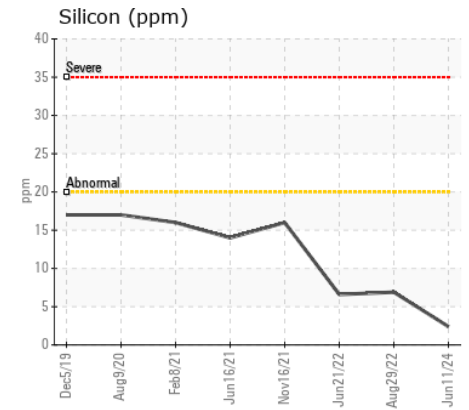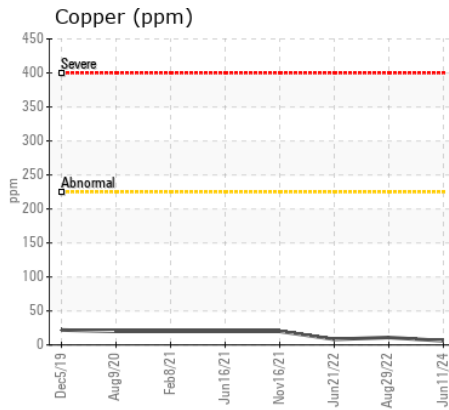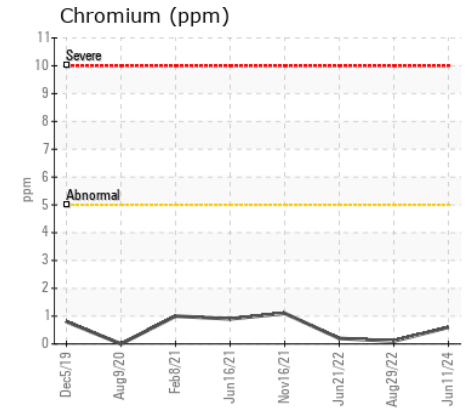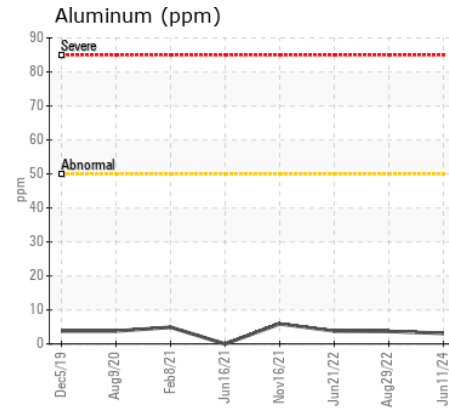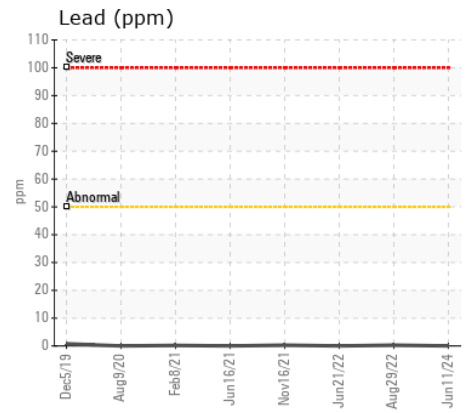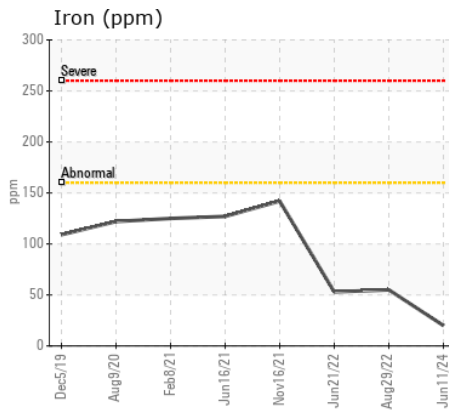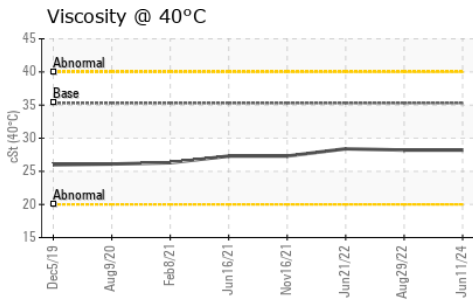

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : VCP439781 **Received** : 14 Jun 2024
Lab Number : 06210606 **Tested** : 17 Jun 2024
Unique Number : 11083470 **Diagnosed** : 17 Jun 2024 - Wes Davis
Test Package : MOB 1

RIPA AND ASSOCIATES
 10149 FISHER AVENUE
 TAMPA, FL
 US 33619
 Contact: PM Services
 PMServices@ripaconstruction.com
 T:
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)