



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Area  
**STEPHEN P VENABLE**  
Machine Id  
[STEPHEN P VENABLE] 004 590046-4  
Component  
Port Reduction Gear  
Fluid  
CHEVRON URSA SUPER PLUS 40 (20 GAL)

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>MW0063010</b>	MW0067993	MW0067970
Sample Date		Client Info		<b>01 Jun 2024</b>	22 May 2024	03 Apr 2024
Machine Age	hrs	Client Info		<b>130598</b>	130380	129703
Oil Age	hrs	Client Info		<b>590</b>	1372	129703
Filter Age	hrs	Client Info		<b>590</b>	1372	129703
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Filter Changed		Client Info		<b>Not Changd</b>	Not Changd	Not Changd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	<b>4</b>	5	1
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m		<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	2	<1
Lead	ppm	ASTM D5185m	>100	<b>2</b>	<1	<1
Copper	ppm	ASTM D5185m	>50	<b>12</b>	6	10
Tin	ppm	ASTM D5185m	>10	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**






There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	<b>4</b>	3	3
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	3	0
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>&lt;1</b>	4	2
Boron	ppm	ASTM D5185m		<b>322</b>	213	308
Barium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>31</b>	16	29
Manganese	ppm	ASTM D5185m		<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185m		<b>9</b>	5	9
Calcium	ppm	ASTM D5185m		<b>2512</b>	1937	2429
Phosphorus	ppm	ASTM D5185m	1000	<b>756</b>	333	694
Zinc	ppm	ASTM D5185m	1090	<b>824</b>	548	791
Sulfur	ppm	ASTM D5185m		<b>2897</b>	1494	2714
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>1.12</b>	1.757	1.12
Visc @ 40°C	cSt	ASTM D445	143	<b>131</b>	131	133

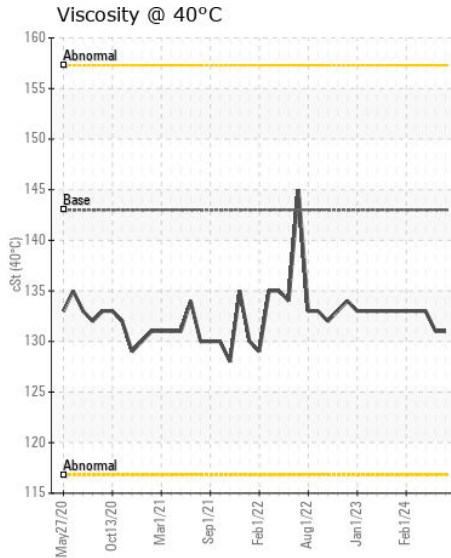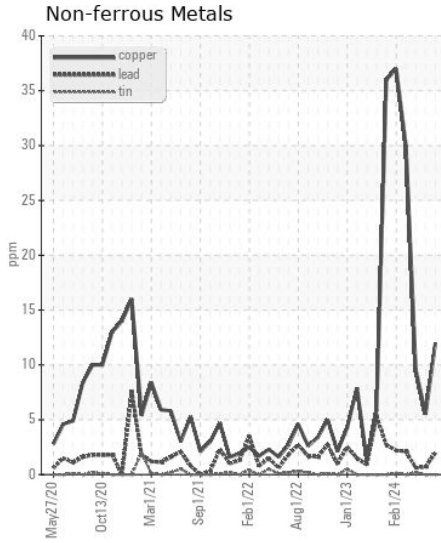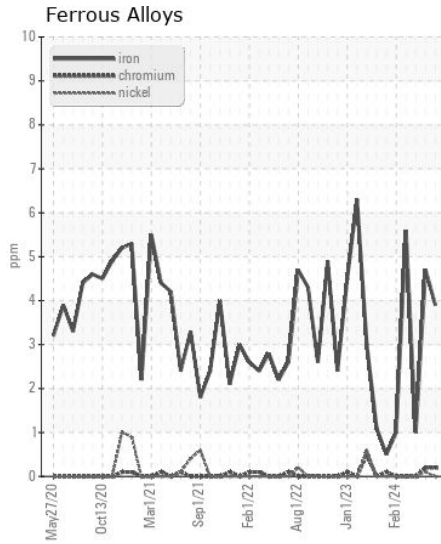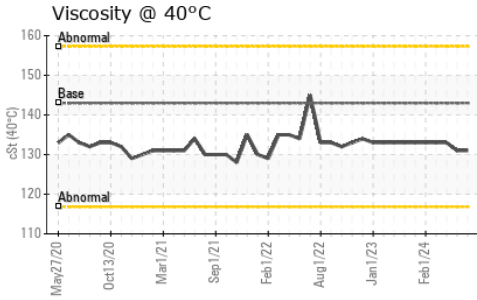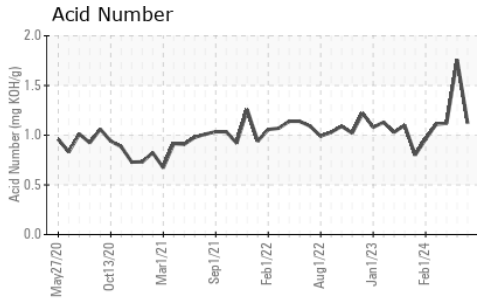

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513

**Sample No.** : MW0063010

**Lab Number** : 06210857

**Unique Number** : 11083721

**Test Package** : MAR 2

**Received** : 14 Jun 2024

**Tested** : 18 Jun 2024

**Diagnosed** : 18 Jun 2024 - Wes Davis

**INGRAM BARGE**

900 S 3RD ST

PADUCAH, KY

US 42003

Contact: ANTHONY VAN CURA

anthony.vancura@ingrambarga.com

T: (270)415-4467

F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)