



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
CRYSTAL D TAYLOR
Machine Id
[CRYSTAL D TAYLOR] 004 503329-4
Component
Port Reduction Gear
Fluid
CHEVRON MEROPA 320 (150 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW0055373	MW0068239	MW0068260
Sample Date		Client Info		01 May 2024	01 Apr 2024	01 Mar 2024
Machine Age	hrs	Client Info		48813	48140	47445
Oil Age	hrs	Client Info		0	48140	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changd	N/A	N/A
Filter Changed		Client Info		Changed	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>150	65	55	60
Chromium	ppm	ASTM D5185m	>10	2	<1	1
Nickel	ppm	ASTM D5185m	>10	<1	0	<1
Titanium	ppm	ASTM D5185m		<1	<1	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>25	4	4	4
Lead	ppm	ASTM D5185m	>100	<1	0	<1
Copper	ppm	ASTM D5185m	>50	8	6	9
Tin	ppm	ASTM D5185m	>10	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	<1
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	6	4	5
Potassium	ppm	ASTM D5185m	>20	2	1	2
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		6	7	3
Boron	ppm	ASTM D5185m	20	6	3	3
Barium	ppm	ASTM D5185m		2	<1	0
Molybdenum	ppm	ASTM D5185m	0	<1	<1	2
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		2	2	2
Calcium	ppm	ASTM D5185m	25	34	34	31
Phosphorus	ppm	ASTM D5185m	235	229	205	208
Zinc	ppm	ASTM D5185m		16	4	8
Sulfur	ppm	ASTM D5185m		5383	6364	5862
Acid Number (AN)	mg KOH/g	ASTM D8045	0.56	0.84	0.78	0.79
Visc @ 40°C	cSt	ASTM D445	304	333	336	333

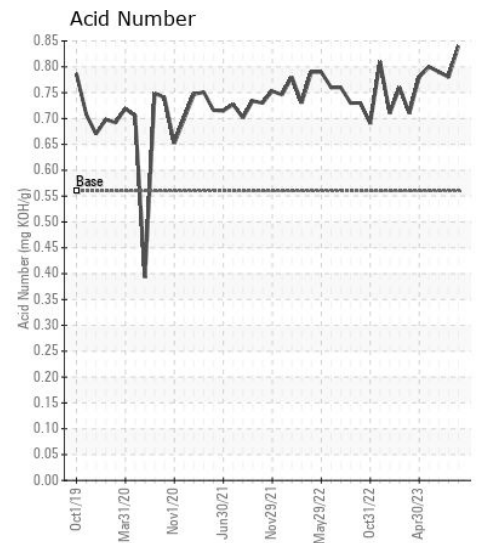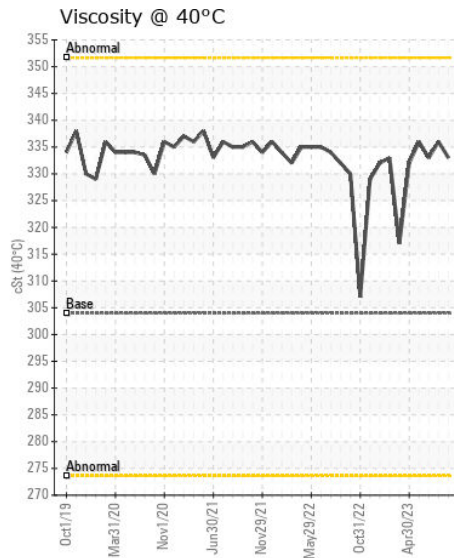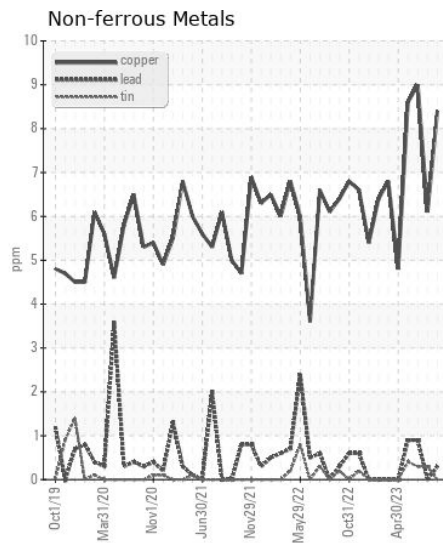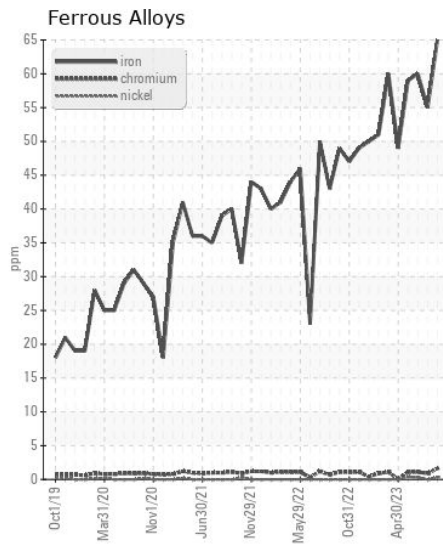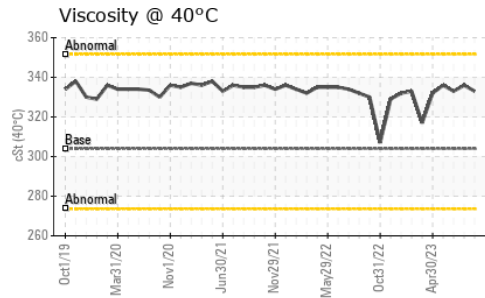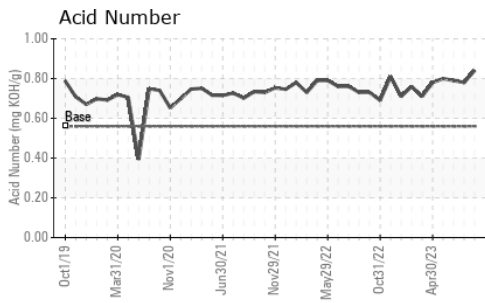

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : MW0055373

Lab Number : 06210864

Unique Number : 11083728

Test Package : MAR 2

Received : 14 Jun 2024

Tested : 18 Jun 2024

Diagnosed : 18 Jun 2024 - Wes Davis

INGRAM BARGE

900 S 3RD ST

PADUCAH, KY

US 42003

Contact: JUSTIN WHEELER

justin.wheeler@ingrambarga.com

T:

F: (615)695-3697

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)