



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
JOHN DEERE 325G 1T0325GKCNJ426066
Component
Right Final Drive
Fluid
JOHN DEERE GL-5 80W90 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0210425	JR0170203	---
Sample Date		Client Info		07 Jun 2024	06 Jun 2023	---
Machine Age	hrs	Client Info		946	542	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184	>1250	27	71	---
Iron	ppm	ASTM D5185m	>750	380	459	---
Chromium	ppm	ASTM D5185m	>9	13	13	---
Nickel	ppm	ASTM D5185m	>10	0	<1	---
Titanium	ppm	ASTM D5185m		1	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>40	14	7	---
Lead	ppm	ASTM D5185m	>15	0	0	---
Copper	ppm	ASTM D5185m	>40	<1	<1	---
Tin	ppm	ASTM D5185m	>10	0	0	---
Vanadium	ppm	ASTM D5185m		<1	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION







There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	56	17	---
Potassium	ppm	ASTM D5185m	>20	17	30	---
Water		WC Method	>0.075	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	LIGHT	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.075	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>51	7	13	---
Boron	ppm	ASTM D5185m		30	78	---
Barium	ppm	ASTM D5185m		26	76	---
Molybdenum	ppm	ASTM D5185m		1	2	---
Manganese	ppm	ASTM D5185m		6	7	---
Magnesium	ppm	ASTM D5185m		2	7	---
Calcium	ppm	ASTM D5185m		15	36	---
Phosphorus	ppm	ASTM D5185m		410	955	---
Zinc	ppm	ASTM D5185m		46	46	---
Sulfur	ppm	ASTM D5185m		21541	30847	---
Visc @ 40°C	cSt	ASTM D445		136	137	---

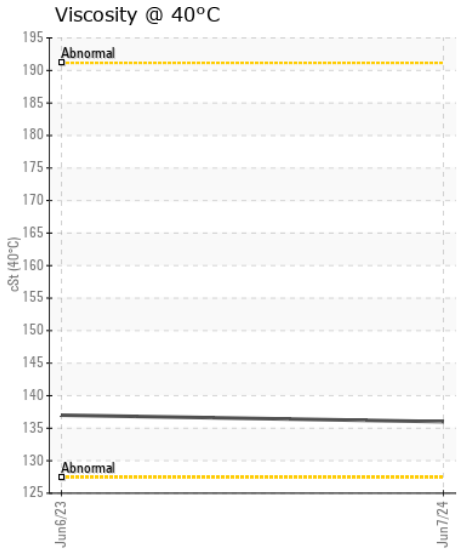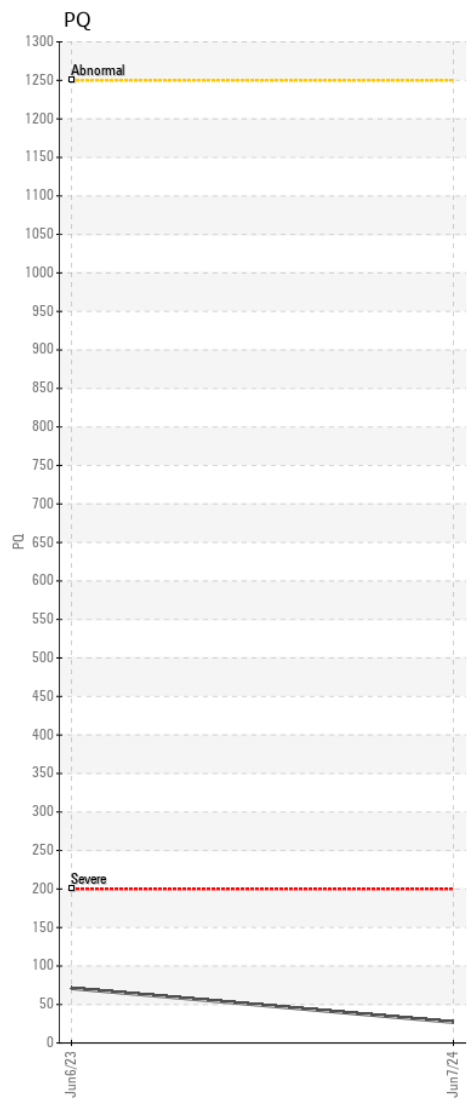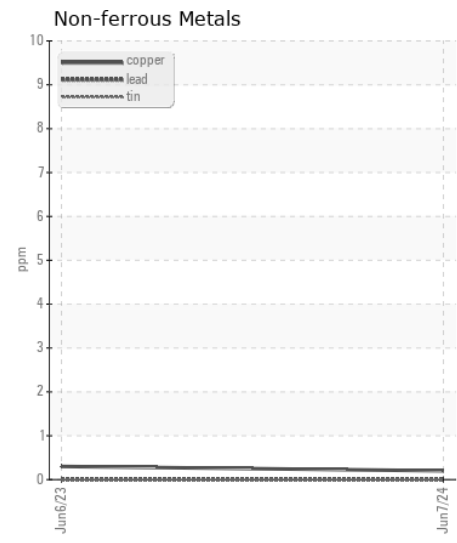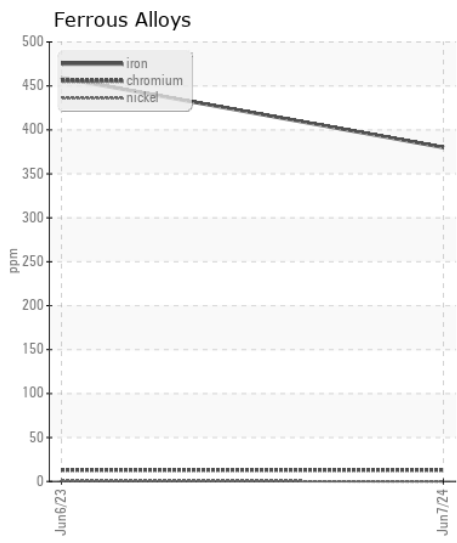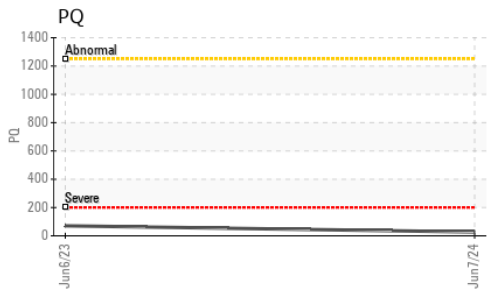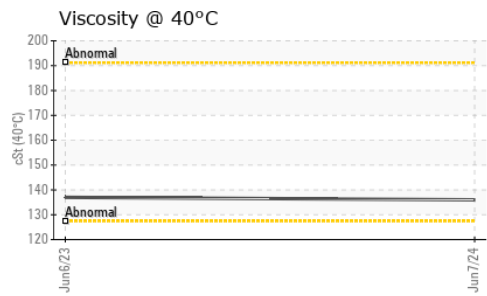

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0210425 **Received** : 14 Jun 2024
Lab Number : 06210936 **Tested** : 18 Jun 2024
Unique Number : 11083800 **Diagnosed** : 18 Jun 2024 - Sean Felton
Test Package : CONST (Additional Tests: PQ)

JRE - STEPHENSON
 245 YARDMASTER COURT
 STEPHENSON, VA
 US 22656-1761
 Contact: PHIL DAUGHERTY
 pdaugherty@jamesriverequipment.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: x:
 F: (540)693-2588