



WEAR	NORMAL
CONTAMINATION	ABNORMAL
FLUID CONDITION	NORMAL

Area

[05W47447]

Machine Id

JOHN DEERE 844P 1DW844PACPLX07311

Component

Brake

Fluid

JOHN DEERE HY-GARD HYD/TRANS (1 QTS)

RECOMMENDATION

The fluid change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0218253	JR0199315	---
Sample Date		Client Info		13 Jun 2024	08 Jan 2024	---
Machine Age	hrs	Client Info		954	439	---
Oil Age	hrs	Client Info		954	439	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Not Changd	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				ABNORMAL	NORMAL	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184		51	39	---
Iron	ppm	ASTM D5185m	>350	94	52	---
Chromium	ppm	ASTM D5185m	>5	0	0	---
Nickel	ppm	ASTM D5185m	>5	0	0	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>8	2	3	---
Lead	ppm	ASTM D5185m	>10	22	21	---
Copper	ppm	ASTM D5185m	>150	2	2	---
Tin	ppm	ASTM D5185m	>5	0	<1	---
Vanadium	ppm	ASTM D5185m		<1	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION








Elemental level of silicon (Si) above normal.

Silicon	ppm	ASTM D5185m	>400	▲ 514	358	---
Potassium	ppm	ASTM D5185m	>20	<1	<1	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185m		6	6	---
Boron	ppm	ASTM D5185m	6	69	74	---
Barium	ppm	ASTM D5185m	0	0	0	---
Molybdenum	ppm	ASTM D5185m	0	248	238	---
Manganese	ppm	ASTM D5185m		2	2	---
Magnesium	ppm	ASTM D5185m	145	402	464	---
Calcium	ppm	ASTM D5185m	3570	1179	1187	---
Phosphorus	ppm	ASTM D5185m	1290	595	674	---
Zinc	ppm	ASTM D5185m	1640	753	762	---
Sulfur	ppm	ASTM D5185m		2202	2078	---
Visc @ 40°C	cSt	ASTM D445	57.0	44.3	46.9	---

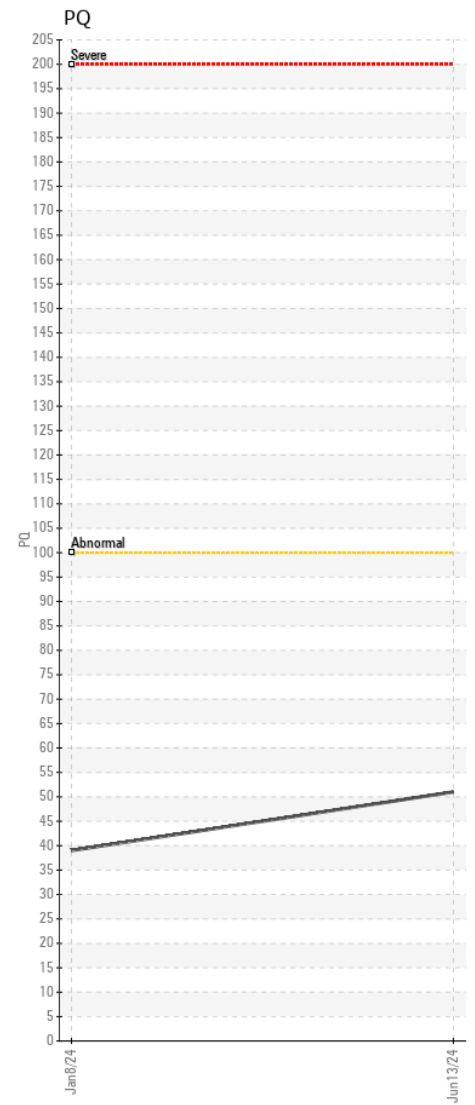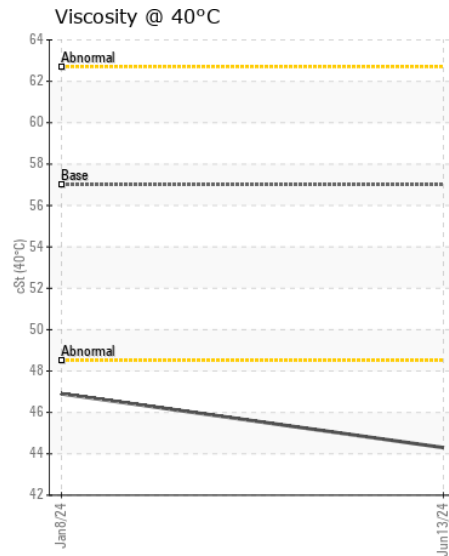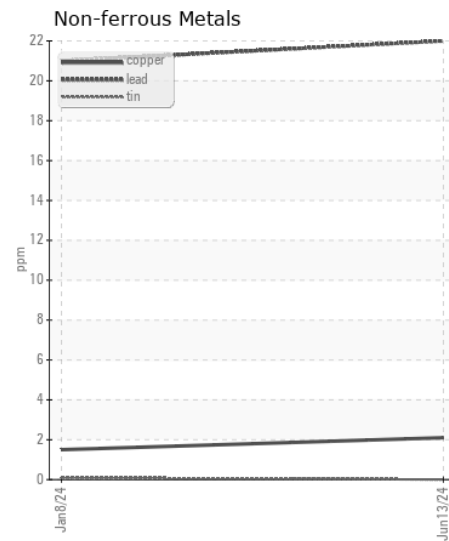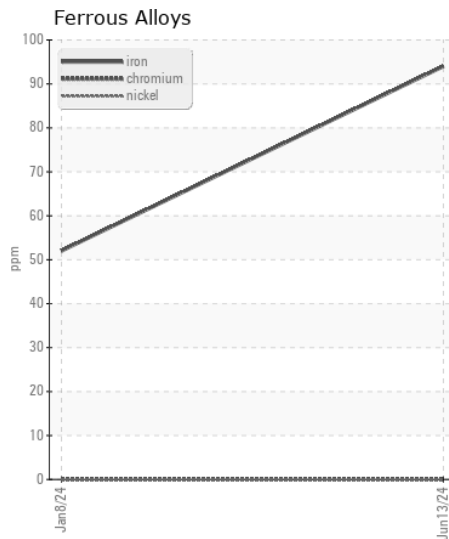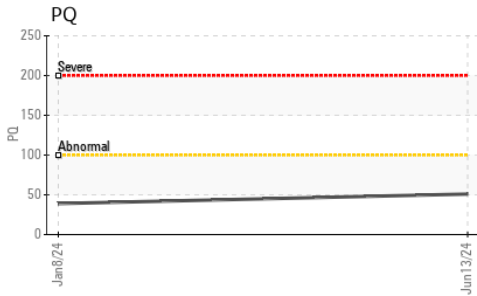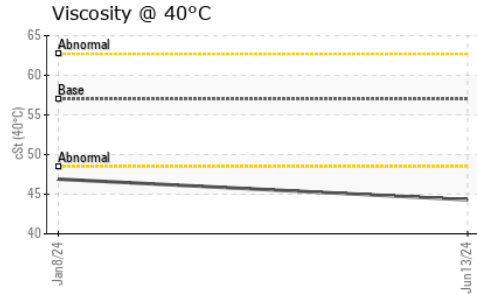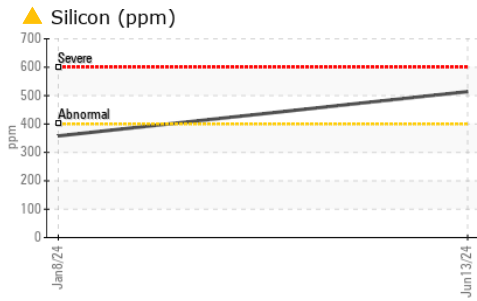

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0218253 **Received** : 14 Jun 2024
Lab Number : 06210944 **Tested** : 18 Jun 2024
Unique Number : 11083808 **Diagnosed** : 18 Jun 2024 - Sean Felton
Test Package : CONST (Additional Tests: PQ)

JRE - MANASSAS PARK
 9107 OWENS DRIVE
 MANASSAS PARK, VA
 US 20111

Contact: DON VEST
 dvest@jamesriverequipment.com
 T: (703)631-8500
 F: (703)631-4715

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)