



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
HC2232
Component
Left Planetary
Fluid
GEAR OIL ISO 220 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0952018	WC0823706	---
Sample Date		Client Info		07 Jun 2024	01 Aug 2023	---
Machine Age	hrs	Client Info		2552	1054	---
Oil Age	hrs	Client Info		1000	1054	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		Not Changed	Changed	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>500	67	61	---
Chromium	ppm	ASTM D5185m	>10	<1	<1	---
Nickel	ppm	ASTM D5185m	>10	0	0	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>25	<1	<1	---
Lead	ppm	ASTM D5185m	>25	0	<1	---
Copper	ppm	ASTM D5185m	>75	4	10	---
Tin	ppm	ASTM D5185m	>10	0	<1	---
Vanadium	ppm	ASTM D5185m		<1	<1	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>75	2	2	---
Potassium	ppm	ASTM D5185m	>20	3	4	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	*Visual	NONE	MODER	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	---

FLUID CONDITION

Suspect the addition of a different brand, or type of oil.

Sodium	ppm	ASTM D5185m		2	3	---
Boron	ppm	ASTM D5185m	50	<1	0	---
Barium	ppm	ASTM D5185m	15	<1	0	---
Molybdenum	ppm	ASTM D5185m	15	<1	0	---
Manganese	ppm	ASTM D5185m		2	<1	---
Magnesium	ppm	ASTM D5185m	50	0	4	---
Calcium	ppm	ASTM D5185m	50	9	13	---
Phosphorus	ppm	ASTM D5185m	350	271	65	---
Zinc	ppm	ASTM D5185m	100	79	32	---
Sulfur	ppm	ASTM D5185m	12500	4704	2442	---
Visc @ 40°C	cSt	ASTM D445	220	223	176	---

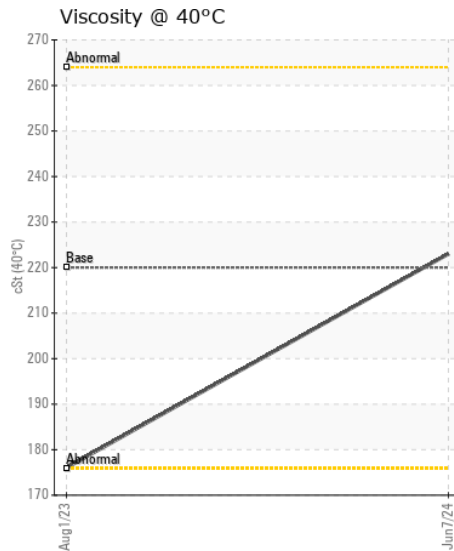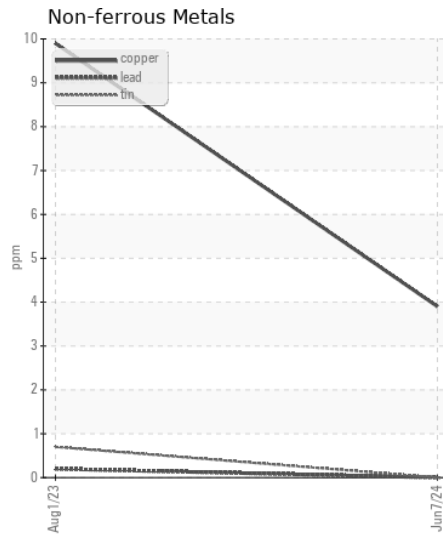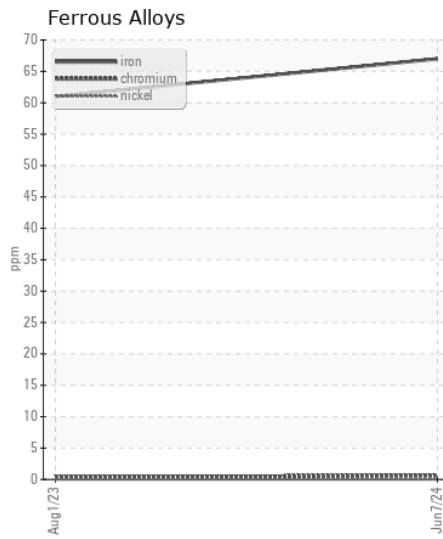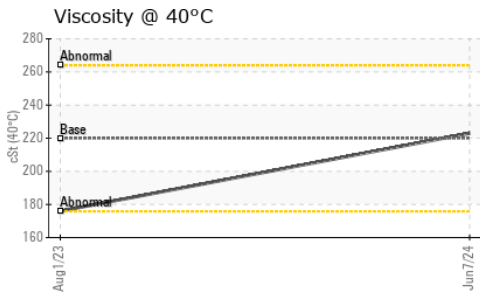

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : WC0952018

Lab Number : 06210953

Unique Number : 11083817

Test Package : CONST

Received : 14 Jun 2024

Tested : 18 Jun 2024

Diagnosed : 18 Jun 2024 - Sean Felton

BUCKNER HEAVY LIFT

4732 NC 54 EAST

GRAHAM, NC

US 27253-9215

Contact: MICHAEL LAWSON

michaell@bucknercompanies.com

T: (336)376-8888

F: (336)376-4090

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)