



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
(48044UA)
Machine Id
934033
Component
Natural Gas Engine
Fluid
DIESEL ENGINE OIL SAE 40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

WEAR

All component wear rates are normal.

CONTAMINATION

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.


Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0116549	GFL0122058	GFL0116596
Sample Date		Client Info		12 Jun 2024	23 May 2024	14 May 2024
Machine Age	hrs	Client Info		1588	1323	1323
Oil Age	hrs	Client Info		1588	1323	1323
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Chngd	Not Chngd	Not Chngd
Filter Changed		Client Info		Not Chngd	Not Chngd	Not Chngd
Sample Status				NORMAL	NORMAL	ABNORMAL

Iron	ppm	ASTM D5185m	>50	21	16	▲ 83
Chromium	ppm	ASTM D5185m	>5	1	<1	3
Nickel	ppm	ASTM D5185m	>4	0	0	2
Titanium	ppm	ASTM D5185m	>5	<1	0	<1
Silver	ppm	ASTM D5185m	>3	0	<1	0
Aluminum	ppm	ASTM D5185m	>25	13	11	36
Lead	ppm	ASTM D5185m	>40	<1	1	4
Copper	ppm	ASTM D5185m	>150	4	3	19
Tin	ppm	ASTM D5185m	>4	0	1	2
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE


Silicon	ppm	ASTM D5185m	>25	9	8	▲ 31
Potassium	ppm	ASTM D5185m	>20	18	15	62
Water		WC Method	>0.1	NEG	NEG	NEG
Soot %	%	*ASTM D7844		0	0	0.1
Nitration	Abs/cm	*ASTM D7624	>20	11.0	9.2	14.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.8	20.2	29.4
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

Sodium	ppm	ASTM D5185m	>216	6	6	8
Boron	ppm	ASTM D5185m	250	11	24	0
Barium	ppm	ASTM D5185m	10	0	0	3
Molybdenum	ppm	ASTM D5185m	100	56	50	68
Manganese	ppm	ASTM D5185m		2	2	13
Magnesium	ppm	ASTM D5185m	450	582	621	937
Calcium	ppm	ASTM D5185m	3000	1589	1514	1565
Phosphorus	ppm	ASTM D5185m	1150	748	802	884
Zinc	ppm	ASTM D5185m	1350	1027	929	1105
Sulfur	ppm	ASTM D5185m	4250	2672	2752	2837
Oxidation	Abs/.1mm	*ASTM D7414	>25	18.7	17.4	29.5
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	5.4	7.3	▲ 1.8
Visc @ 100°C	cSt	ASTM D445	14.4	15.0	14.8	14.4


FT-IR (Direct Trend)

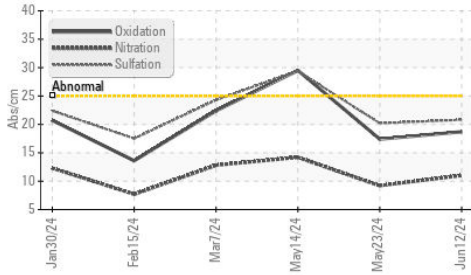


Ferrous Alloys

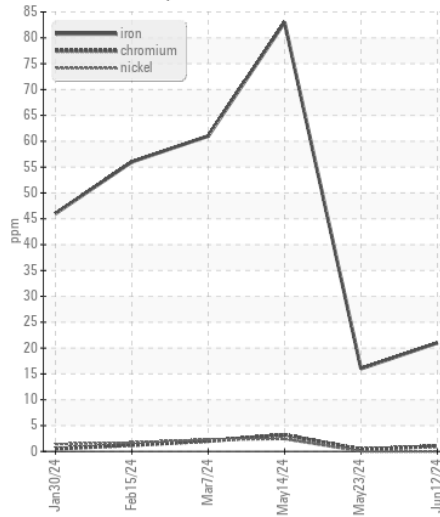


Base Number

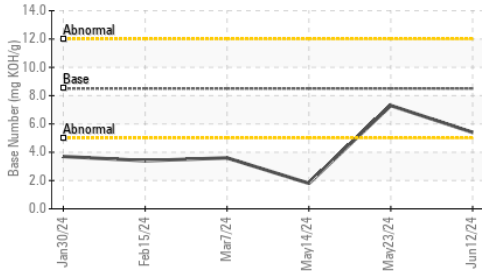


Non-ferrous Metals

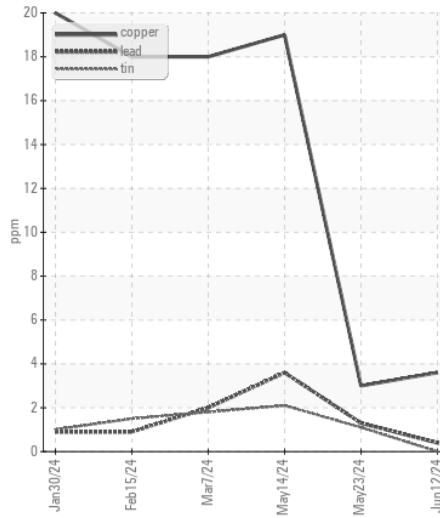


Viscosity @ 100°C

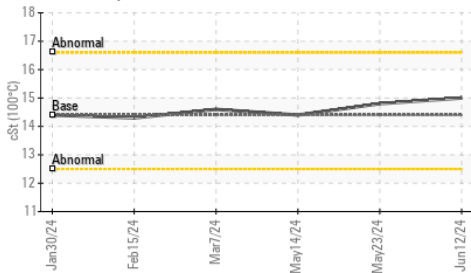

Viscosity @ 100°C

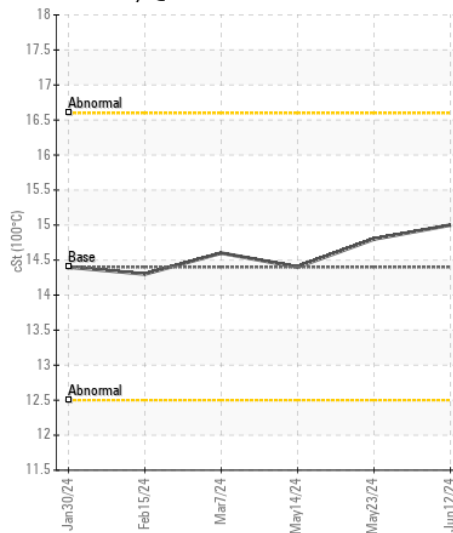

Base Number

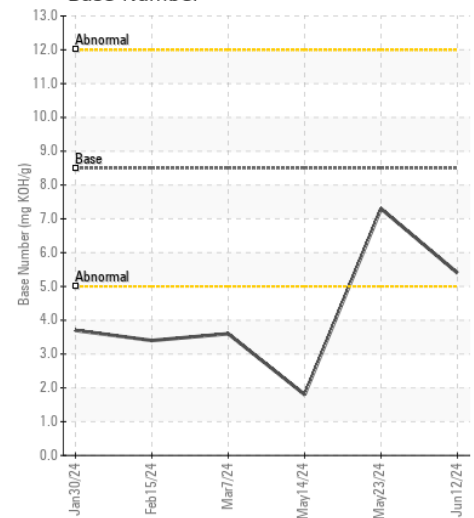

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0116549
Lab Number : 06211023
Unique Number : 11083887
Test Package : FLEET

Received : 14 Jun 2024
Tested : 18 Jun 2024
Diagnosed : 18 Jun 2024 - Wes Davis

GFL Environmental - 652 - Fredericksburg Hauling
 10954 Houser Drive
 Fredericksburg, VA
 US 22408
 Contact: WILLIAM MILO
 wmilo@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: