



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**HC2232**  
Component  
**Diesel Engine**  
Fluid  
**DIESEL ENGINE OIL SAE 5W40 (--- GAL)**

## RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0952175</b>	WC0893104	WC0823501
Sample Date		Client Info		<b>07 Jun 2024</b>	01 Feb 2024	27 Nov 2023
Machine Age	hrs	Client Info		<b>2552</b>	2057	1434
Oil Age	hrs	Client Info		<b>495</b>	0	380
Filter Age	hrs	Client Info		<b>495</b>	0	380
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	<b>5</b>	0	2
Chromium	ppm	ASTM D5185m	>20	<b>0</b>	<1	0
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	<1	3
Lead	ppm	ASTM D5185m	>40	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m	>330	<b>8</b>	12	89
Tin	ppm	ASTM D5185m	>15	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	<b>8</b>	6	7
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	5	3
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.1</b>	0	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.8</b>	8.0	9.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>34.1</b>	21.4	22.8
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>44	<b>&lt;1</b>	0	1
Boron	ppm	ASTM D5185m	250	<b>75</b>	144	91
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	1
Molybdenum	ppm	ASTM D5185m	100	<b>37</b>	<1	5
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m	450	<b>688</b>	56	511
Calcium	ppm	ASTM D5185m	3000	<b>1249</b>	2115	1494
Phosphorus	ppm	ASTM D5185m	1150	<b>984</b>	954	854
Zinc	ppm	ASTM D5185m	1350	<b>1333</b>	1191	1005
Sulfur	ppm	ASTM D5185m	4250	<b>3539</b>	3277	2667
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>39.1</b>	18.2	21.7
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>4.7</b>	6.2	6.1
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.2</b>	13.6	12.5


FT-IR (Direct Trend)

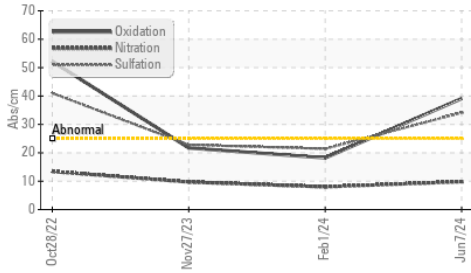


Base Number

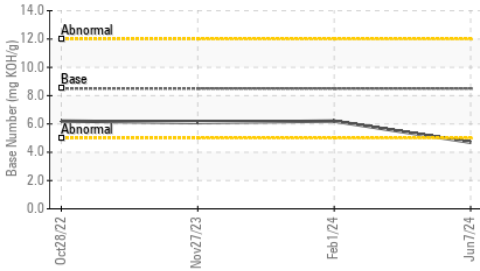


Viscosity @ 100°C

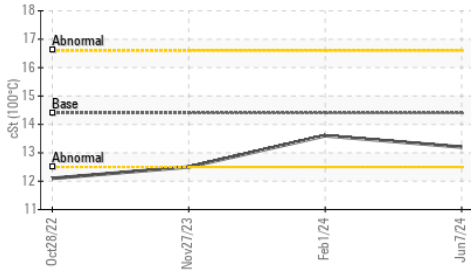


Ferrous Alloys

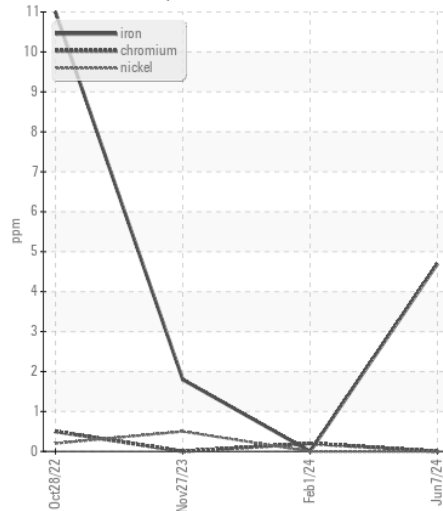


Non-ferrous Metals

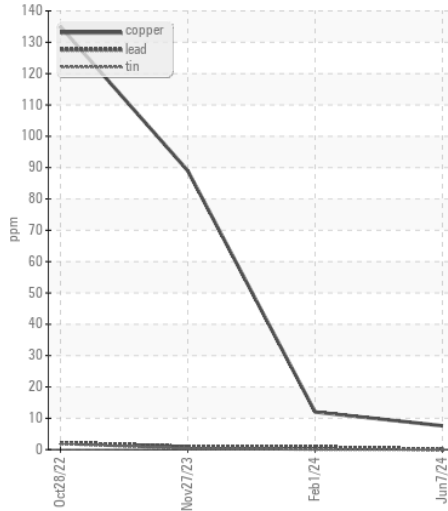

Viscosity @ 100°C

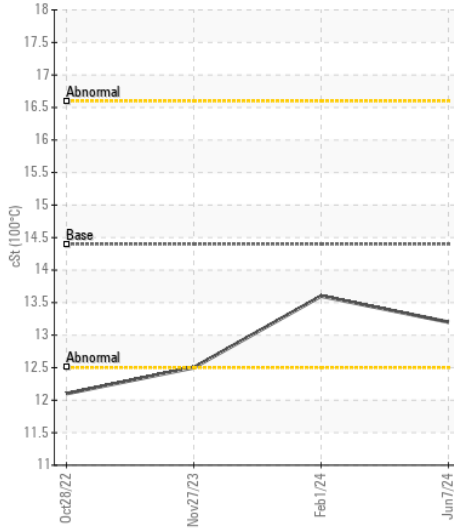

Base Number

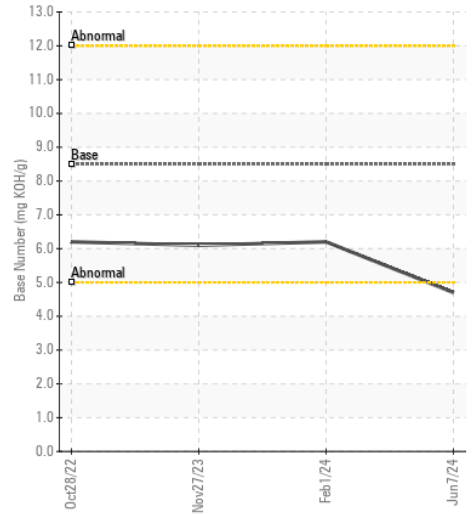

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : WC0952175 Received : 14 Jun 2024  
 Lab Number : 06211052 Tested : 19 Jun 2024  
 Unique Number : 11083916 Diagnosed : 19 Jun 2024 - Sean Felton  
 Test Package : CONST ( Additional Tests: TBN )

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

BUCKNER HEAVY LIFT

4732 NC 54 EAST  
 GRAHAM, NC  
 US 27253-9215

Contact: MICHAEL LAWSON  
 michael@bucknercompanies.com

T: (336)376-8888  
 F: (336)376-4090