



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**1653**  
 Component  
**1 Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 15W40 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0858204</b>	WC0858186	WC0858133
Sample Date		Client Info		<b>10 Jun 2024</b>	20 Mar 2024	01 Feb 2024
Machine Age	hrs	Client Info		<b>3390</b>	2907	2558
Oil Age	hrs	Client Info		<b>520</b>	520	113
Filter Age	hrs	Client Info		<b>520</b>	520	113
Oil Changed		Client Info		<b>Changed</b>	Changed	Not Changd
Filter Changed		Client Info		<b>Changed</b>	Changed	Not Changd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>90	<b>17</b>	22	10
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	2	<1
Nickel	ppm	ASTM D5185m	>2	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m	>2	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	3	3
Lead	ppm	ASTM D5185m	>40	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	2	1
Tin	ppm	ASTM D5185m	>15	<b>0</b>	1	<1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	<b>4</b>	6	4
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	7	7
Fuel		WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>6	<b>0.2</b>	0.2	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>8.2</b>	8.5	5.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>19.4</b>	19.4	18.4
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	<b>1</b>	0	<1
Boron	ppm	ASTM D5185m	250	<b>4</b>	6	8
Barium	ppm	ASTM D5185m	10	<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185m	100	<b>59</b>	60	61
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	450	<b>950</b>	861	886
Calcium	ppm	ASTM D5185m	3000	<b>1156</b>	1089	1034
Phosphorus	ppm	ASTM D5185m	1150	<b>1056</b>	1015	1007
Zinc	ppm	ASTM D5185m	1350	<b>1290</b>	1144	1198
Sulfur	ppm	ASTM D5185m	4250	<b>3710</b>	3036	3108
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.8</b>	17.3	14.2
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>7.8</b>	8.0	8.8
Visc @ 100°C	cSt	ASTM D445	14.4	<b>12.8</b>	12.8	13.4

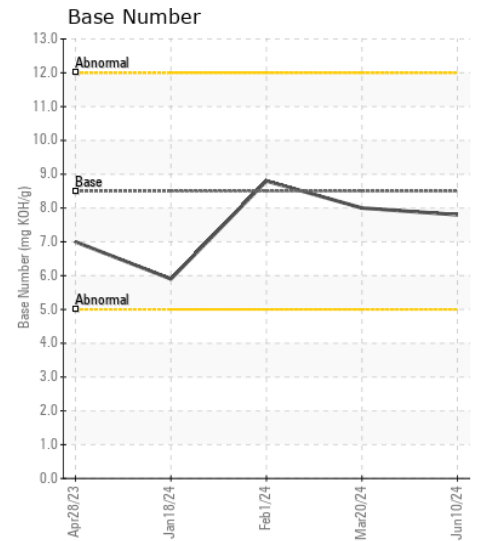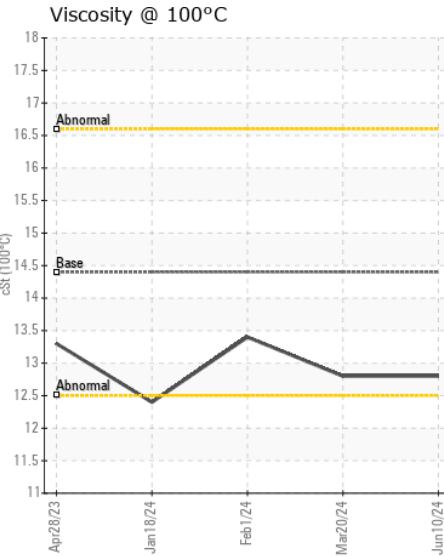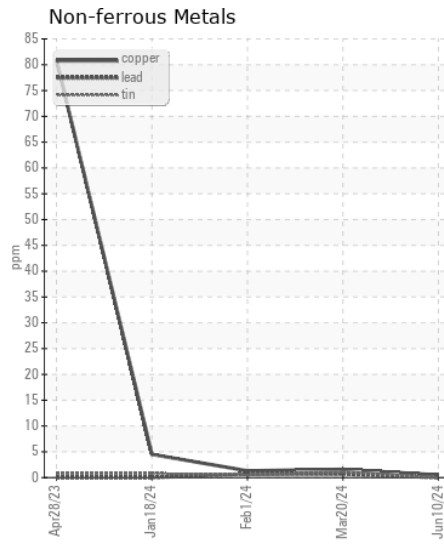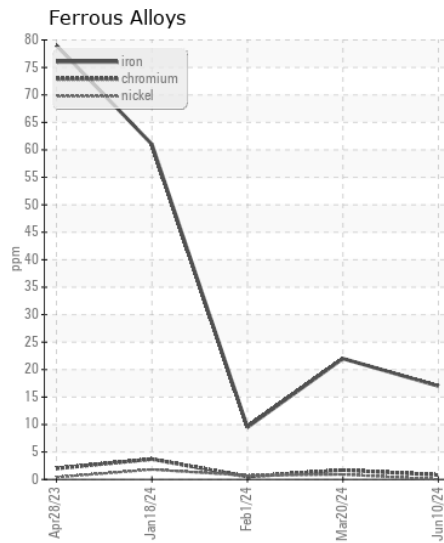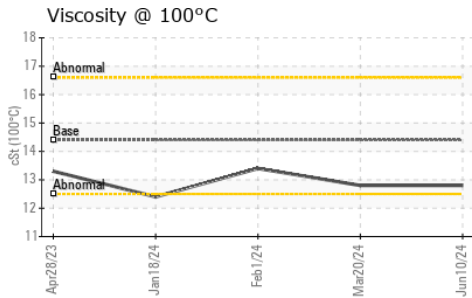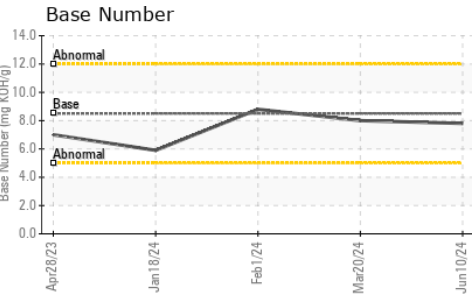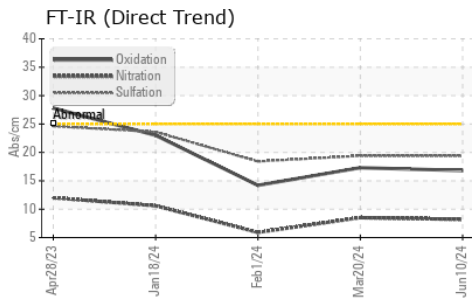

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0858204  
**Lab Number** : 06211061  
**Unique Number** : 11083925  
**Test Package** : CONST ( Additional Tests: TBN )

**Apple Valley Waste - Chambersburg Location**  
 5436 Sunset Pike  
 Chambersburg, PA  
 US 17202  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: