



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
LINK BELT C6019
Component
Diesel Engine
Fluid
SHELL ROTELLA T4 15W40 (7 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0909708	WC0866914	WC0832020
Sample Date		Client Info		11 Jun 2024	10 Nov 2023	21 Jul 2023
Machine Age	hrs	Client Info		12119	11359	10924
Oil Age	hrs	Client Info		250	250	250
Filter Age	hrs	Client Info		250	250	250
Oil Changed		Client Info		Changed	Changed	N/A
Filter Changed		Client Info		Changed	Changed	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	11	18	17
Chromium	ppm	ASTM D5185m	>5	<1	<1	<1
Nickel	ppm	ASTM D5185m	>4	0	0	0
Titanium	ppm	ASTM D5185m	>2	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>15	1	3	3
Lead	ppm	ASTM D5185m	>25	0	2	0
Copper	ppm	ASTM D5185m	>100	1	33	43
Tin	ppm	ASTM D5185m	>4	0	<1	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>25	6	6	9
Potassium	ppm	ASTM D5185m	>20	6	50	184
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	0.0	0.0
Soot %	%	*ASTM D7844	>6	0.5	0.6	0.4
Nitration	Abs/cm	*ASTM D7624	>20	9.4	10.9	10.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.6	25.6	20.0
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		1	11	33
Boron	ppm	ASTM D5185m		17	43	36
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		16	21	62
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m		116	70	98
Calcium	ppm	ASTM D5185m		2400	2089	2072
Phosphorus	ppm	ASTM D5185m		999	918	1050
Zinc	ppm	ASTM D5185m		1193	1140	1292
Sulfur	ppm	ASTM D5185m		4112	3161	4356
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.7	22.1	15.8
Base Number (BN)	mg KOH/g	ASTM D2896	10.1	5.9	5.5	6.9
Visc @ 100°C	cSt	ASTM D445	15	13.8	13.6	13.3


FT-IR (Direct Trend)

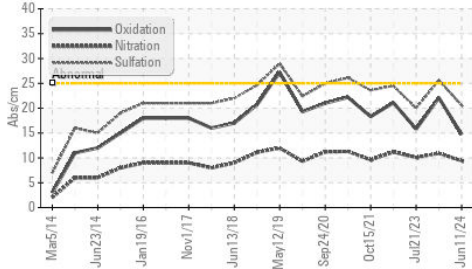


Base Number

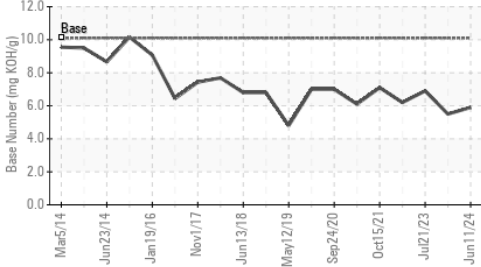


Viscosity @ 100°C

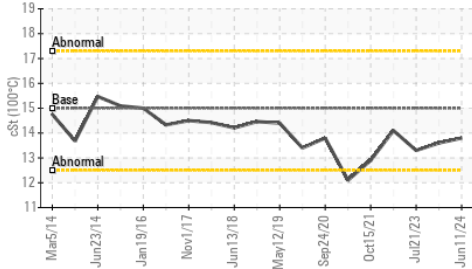


Ferrous Alloys

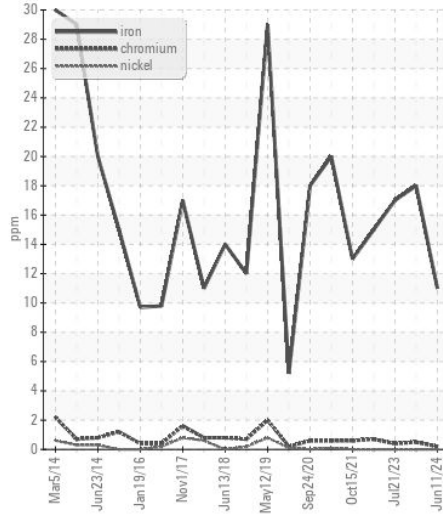


Non-ferrous Metals

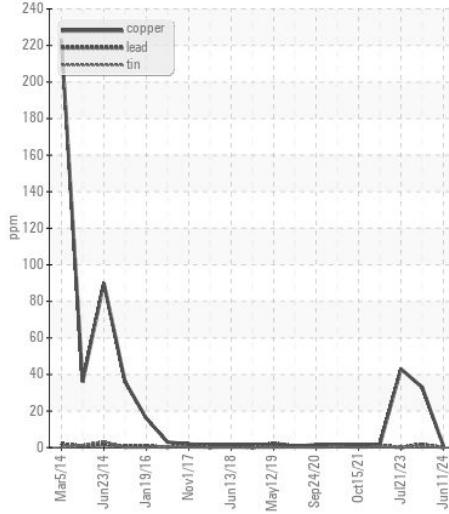

Viscosity @ 100°C

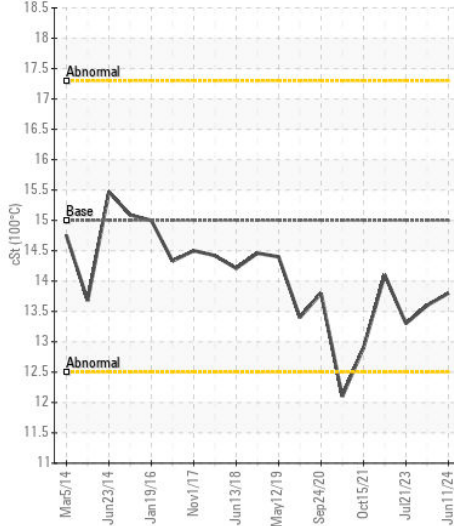

Base Number

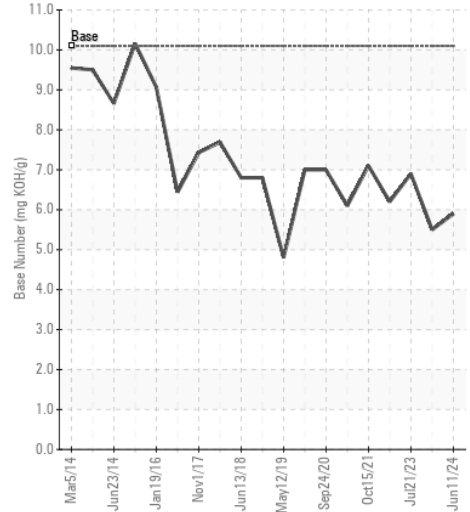

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0909708
Lab Number : 06211080
Unique Number : 11083944
Test Package : FLEET

Received : 14 Jun 2024
Tested : 19 Jun 2024
Diagnosed : 19 Jun 2024 - Wes Davis

GUY M TURNER & TURNER TRANSFER
 4505 SOUTH HOLDEN ROAD
 GREENSBORO, NC
 US 27406

Contact: ROGER HIXSON
 rhixson@guymtturner.com

T: (336)294-4660
 F: (336)294-6644

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)