



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
3233
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 10W30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0916530	WC0878557	WC0878584
Sample Date		Client Info		01 Jun 2024	09 Mar 2024	02 Dec 2023
Machine Age	mls	Client Info		430059	408542	0
Oil Age	mls	Client Info		2517	23416	20265
Filter Age	mls	Client Info		2517	23416	20265
Oil Changed		Client Info		Changed	Changed	N/A
Filter Changed		Client Info		Changed	Changed	N/A
Sample Status				NORMAL	NORMAL	ATTENTION

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	17	14	16
Chromium	ppm	ASTM D5185m	>20	1	<1	<1
Nickel	ppm	ASTM D5185m	>4	0	0	<1
Titanium	ppm	ASTM D5185m		<1	0	<1
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	4	3	3
Lead	ppm	ASTM D5185m	>40	3	3	3
Copper	ppm	ASTM D5185m	>330	1	0	<1
Tin	ppm	ASTM D5185m	>15	0	<1	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	4	4	5
Potassium	ppm	ASTM D5185m	>20	4	<1	3
Fuel		WC Method	>5	<1.0	<1.0	1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.3	0.4	0.3
Nitration	Abs/cm	*ASTM D7624	>20	9.7	9.9	8.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.6	20.9	20.1
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	0	<1
Boron	ppm	ASTM D5185m	250	0	2	<1
Barium	ppm	ASTM D5185m	10	0	0	3
Molybdenum	ppm	ASTM D5185m	100	59	58	57
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m	450	1018	940	911
Calcium	ppm	ASTM D5185m	3000	1134	1050	1178
Phosphorus	ppm	ASTM D5185m	1150	1039	1015	1036
Zinc	ppm	ASTM D5185m	1350	1302	1210	1259
Sulfur	ppm	ASTM D5185m	4250	3462	3177	3155
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.3	17.6	16.3
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	7.3	7.3	7.4
Visc @ 100°C	cSt	ASTM D445	10.9	11.3	11.2	11.3

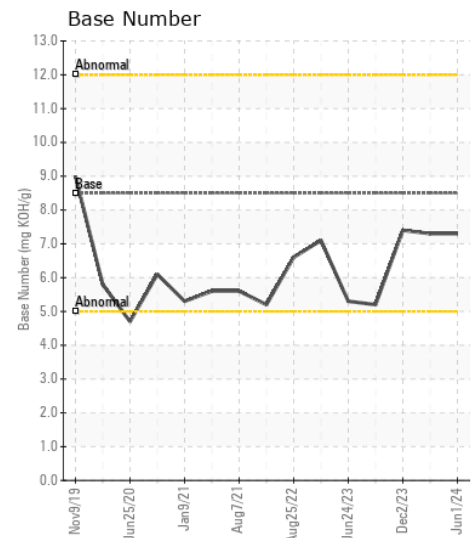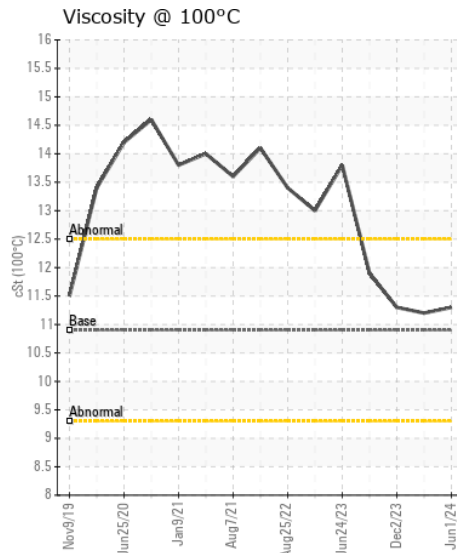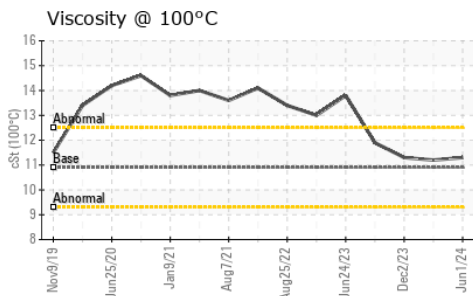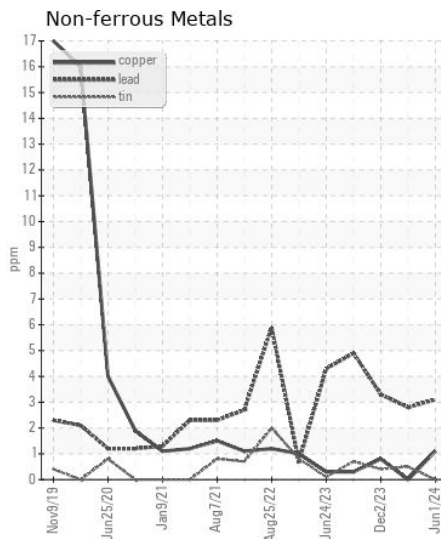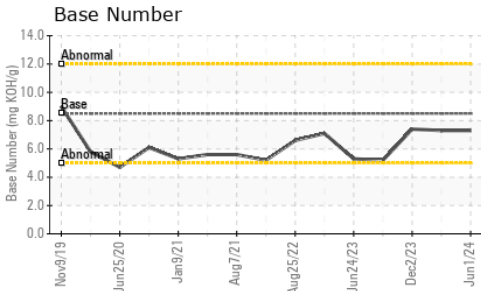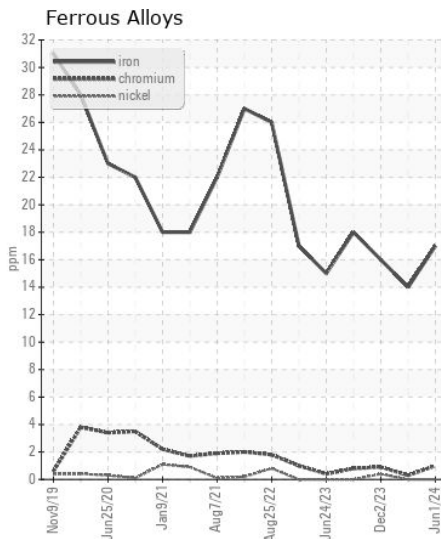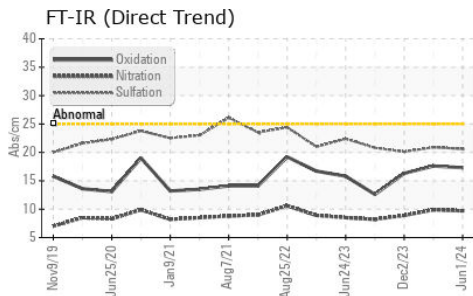

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0916530 **Received** : 14 Jun 2024
Lab Number : 06211105 **Tested** : 18 Jun 2024
Unique Number : 11083969 **Diagnosed** : 18 Jun 2024 - Wes Davis
Test Package : FLEET

CARCO TRANSPORTATION
 3403 EAST ROOSEVELT ROAD
 LITTLE ROCK, AR
 US 72206
 Contact: DENNIS CATES
 denniscales@carcotrans.com
 T: (800)967-0777
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)