



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**FREIGHTLINER 45779**  
Component  
**Diesel Engine**  
Fluid  
**DIESEL ENGINE OIL SAE 15W40 (38 QTS)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0875920</b>	WC0875840	WC0852281
Sample Date		Client Info		<b>05 Jun 2024</b>	28 Dec 2023	13 Sep 2023
Machine Age	mls	Client Info		<b>540679</b>	529835	520537
Oil Age	mls	Client Info		<b>20000</b>	0	0
Filter Age	mls	Client Info		<b>20000</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	N/A
Filter Changed		Client Info		<b>Changed</b>	Changed	N/A
Sample Status				<b>NORMAL</b>	ABNORMAL	NORMAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>200	<b>12</b>	38	7
Chromium	ppm	ASTM D5185m	>6	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	>2	<b>1</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>50	<b>3</b>	4	<1
Lead	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>50	<b>2</b>	17	2
Tin	ppm	ASTM D5185m	>6	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE

## CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>50	<b>9</b>	6	6
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	▲ 67	2
Fuel		WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	*ASTM D7844	>3	<b>0.5</b>	0.4	0.6
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.1</b>	7.1	6.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.6</b>	21.1	19.0
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	<b>3</b>	▲ 63	2
Boron	ppm	ASTM D5185m	250	<b>219</b>	361	7
Barium	ppm	ASTM D5185m	10	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	100	<b>72</b>	92	65
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m	450	<b>464</b>	429	1027
Calcium	ppm	ASTM D5185m	3000	<b>1542</b>	1272	1148
Phosphorus	ppm	ASTM D5185m	1150	<b>958</b>	1042	1101
Zinc	ppm	ASTM D5185m	1350	<b>1146</b>	1214	1335
Sulfur	ppm	ASTM D5185m	4250	<b>3517</b>	3402	3797
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>16.3</b>	15.5	13.6
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	<b>7.8</b>	7.8	9.2
Visc @ 100°C	cSt	ASTM D445	14.4	<b>14.0</b>	13.9	13.2

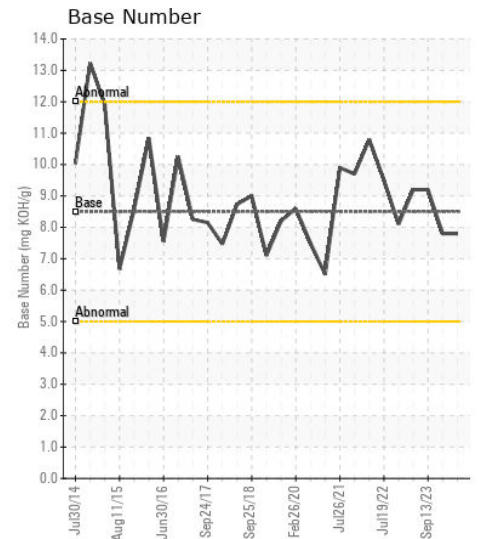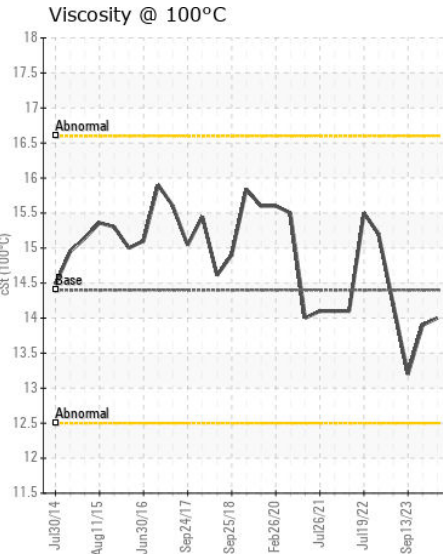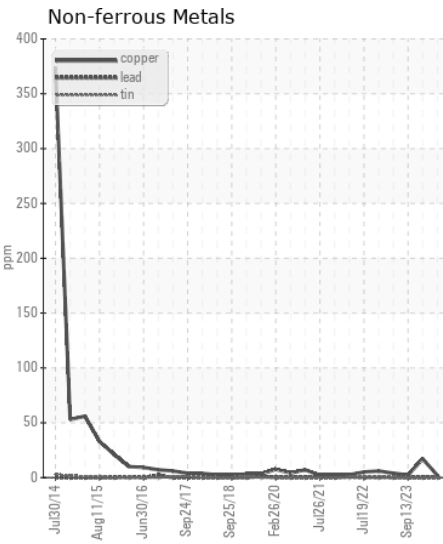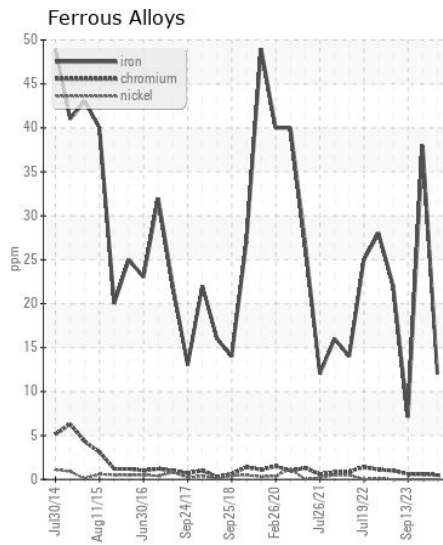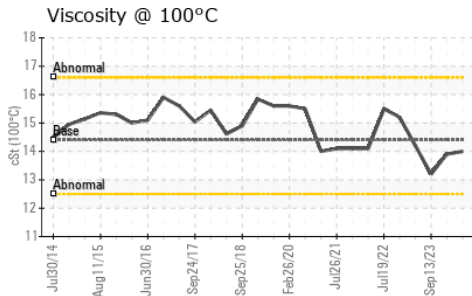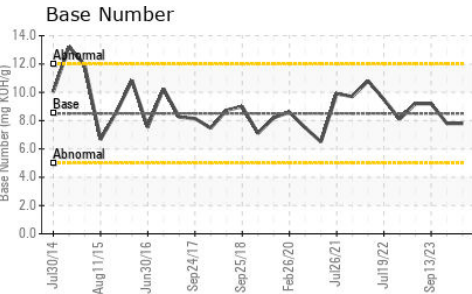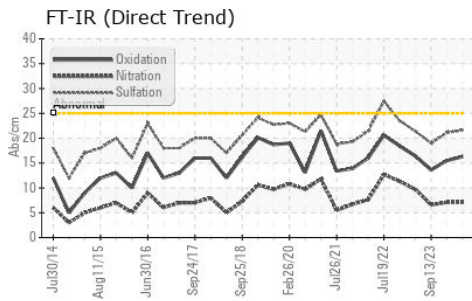

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0875920  
**Lab Number** : 06211134  
**Unique Number** : 11083998  
**Test Package** : FLEET

**Received** : 14 Jun 2024  
**Tested** : 18 Jun 2024  
**Diagnosed** : 18 Jun 2024 - Wes Davis

**SALEM NATIONALEASE CORPORATION**  
 198 PARK PLAZA DRIVE  
 WINSTON SALEM, NC  
 US 27105

Contact: Audrey Hopkins  
 Audrey.Hopkins@salemcorp.com

T: (336)767-9642

F: x:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)