



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
PETERBILT 9571655
Component
Diesel Engine
Fluid
MOBIL 15W40 (45 QTS)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		RPL0018005	RPL0006283	RPL0006328
Sample Date		Client Info		11 Jun 2024	05 Jan 2023	28 Oct 2022
Machine Age	mls	Client Info		89689	53199	49340
Oil Age	mls	Client Info		17000	49340	11759
Filter Age	mls	Client Info		17000	49340	11759
Oil Changed		Client Info		Not Changd	N/A	Changed
Filter Changed		Client Info		Not Changd	N/A	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>100	38	9	20
Chromium	ppm	ASTM D5185m	>20	0	0	<1
Nickel	ppm	ASTM D5185m	>4	0	0	0
Titanium	ppm	ASTM D5185m		0	0	0
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	11	5	16
Lead	ppm	ASTM D5185m	>40	0	0	<1
Copper	ppm	ASTM D5185m	>330	2	<1	2
Tin	ppm	ASTM D5185m	>15	<1	0	<1
Vanadium	ppm	ASTM D5185m		0	0	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION








There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>25	13	10	8
Potassium	ppm	ASTM D5185m	>20	25	15	41
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844	>3	0.4	0.1	0.3
Nitration	Abs/cm	*ASTM D7624	>20	12.9	8.6	11.9
Sulfation	Abs/.1mm	*ASTM D7415	>30	25.3	19.7	24.1
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>118	2	0	<1
Boron	ppm	ASTM D5185m		14	76	21
Barium	ppm	ASTM D5185m		0	2	2
Molybdenum	ppm	ASTM D5185m		118	91	51
Manganese	ppm	ASTM D5185m		<1	<1	<1
Magnesium	ppm	ASTM D5185m		705	560	553
Calcium	ppm	ASTM D5185m		1307	1435	1582
Phosphorus	ppm	ASTM D5185m		791	727	795
Zinc	ppm	ASTM D5185m		901	870	993
Sulfur	ppm	ASTM D5185m		3444	2720	2894
Oxidation	Abs/.1mm	*ASTM D7414	>25	23.3	17.5	23.6
Base Number (BN)	mg KOH/g	ASTM D2896		4.0	8.4	9.4
Visc @ 100°C	cSt	ASTM D445		12.9	13.3	13.3

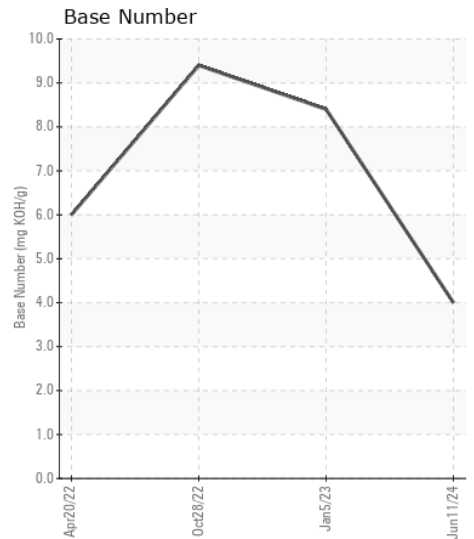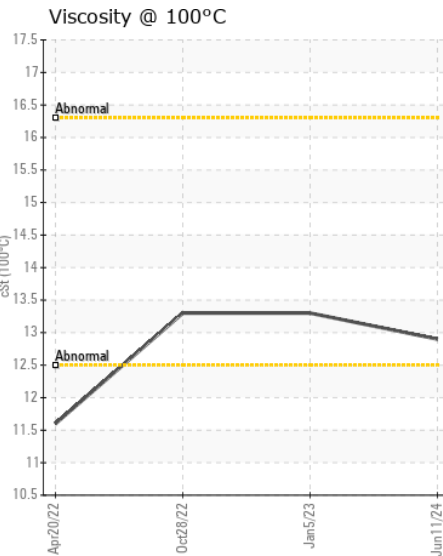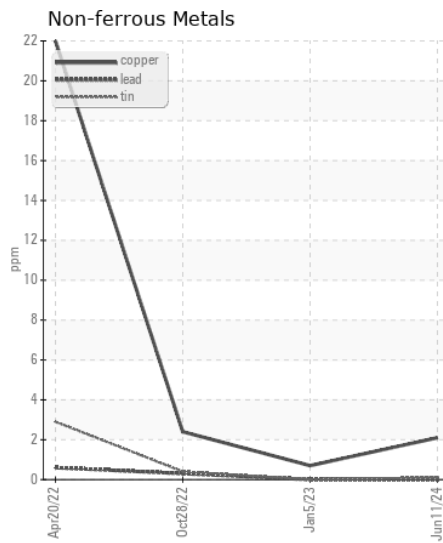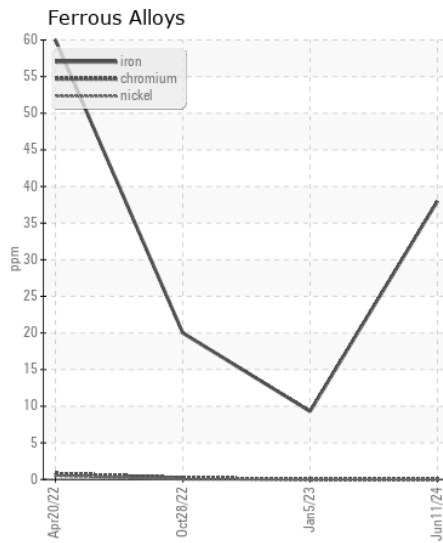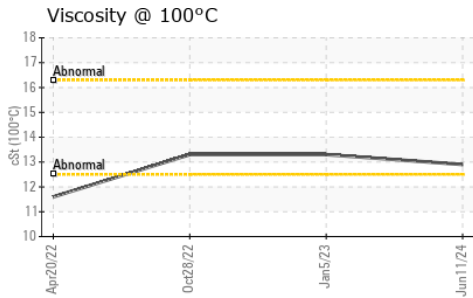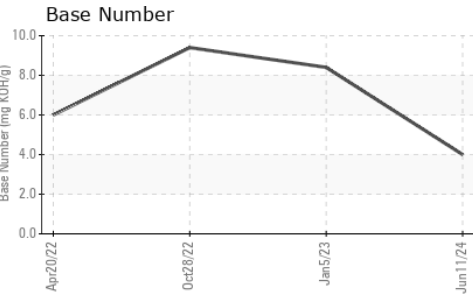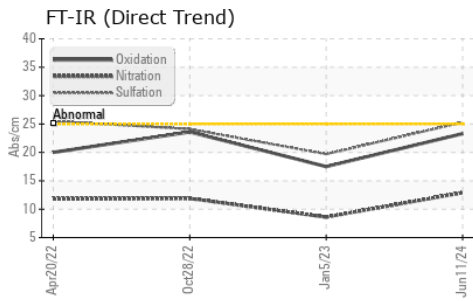

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RPL0018005 **Received** : 17 Jun 2024
Lab Number : 06211255 **Tested** : 18 Jun 2024
Unique Number : 11084119 **Diagnosed** : 18 Jun 2024 - Angela Borella
Test Package : FLEET

RTL PACLEASE - 7004 - Austin
 1205 Smith Road
 Austin, TX
 US 78721
 Contact: David Johnson
 JohnsonD@RushEnterprises.com
 T: (512)401-7063
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)