



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
BRANDI ANN
Component
Port Main Engine
Fluid
DIESEL ENGINE OIL SAE 15W40 (22 GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		MW0071322	MW0047986	MW0048210
Sample Date		Client Info		23 May 2024	18 Mar 2024	19 Jan 2024
Machine Age	hrs	Client Info		21930	20815	19743
Oil Age	hrs	Client Info		1115	1072	834
Filter Age	hrs	Client Info		1115	1072	834
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>75	4	4	<1
Chromium	ppm	ASTM D5185m	>8	0	<1	<1
Nickel	ppm	ASTM D5185m	>2	0	0	0
Titanium	ppm	ASTM D5185m	>3	2	<1	0
Silver	ppm	ASTM D5185m	>2	0	<1	0
Aluminum	ppm	ASTM D5185m	>15	3	3	2
Lead	ppm	ASTM D5185m	>18	<1	<1	0
Copper	ppm	ASTM D5185m	>80	1	1	<1
Tin	ppm	ASTM D5185m	>14	<1	<1	0
Vanadium	ppm	ASTM D5185m		0	<1	0
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the oil.


Silicon	ppm	ASTM D5185m	>20	4	5	5
Potassium	ppm	ASTM D5185m	>20	3	2	<1
Fuel		WC Method	>4.0	<1.0	<1.0	<1.0
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	*ASTM D7844		0.3	0.3	0.2
Nitration	Abs/cm	*ASTM D7624	>20	6.8	6.6	6.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.0	23.1	22.9
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	NEG

FLUID CONDITION


The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m	>158	3	0	<1
Boron	ppm	ASTM D5185m	250	325	344	357
Barium	ppm	ASTM D5185m	10	0	2	2
Molybdenum	ppm	ASTM D5185m	100	90	140	134
Manganese	ppm	ASTM D5185m		<1	<1	0
Magnesium	ppm	ASTM D5185m	450	543	663	659
Calcium	ppm	ASTM D5185m	3000	1594	1616	1407
Phosphorus	ppm	ASTM D5185m	1150	1023	730	680
Zinc	ppm	ASTM D5185m	1350	1193	869	858
Sulfur	ppm	ASTM D5185m	4250	3832	2791	2389
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.9	16.8	16.2
Base Number (BN)	mg KOH/g	ASTM D2896	8.5	8.0	8.7	9.1
Visc @ 100°C	cSt	ASTM D445	14.4	13.0	12.9	13.1


FT-IR (Direct Trend)

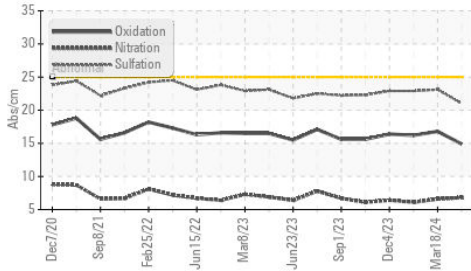


Base Number

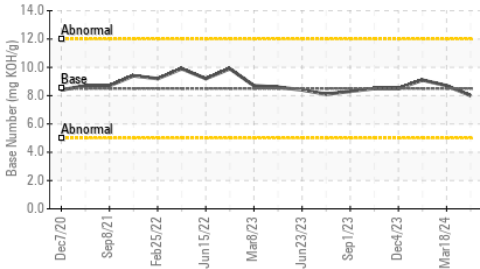


Viscosity @ 100°C

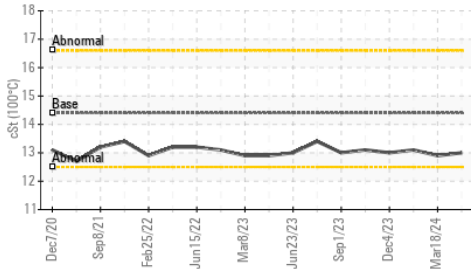


Ferrous Alloys

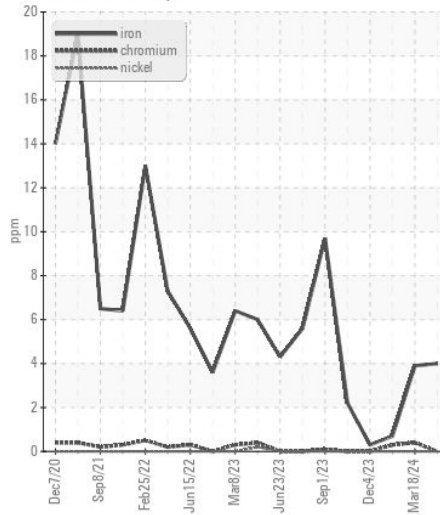


Non-ferrous Metals

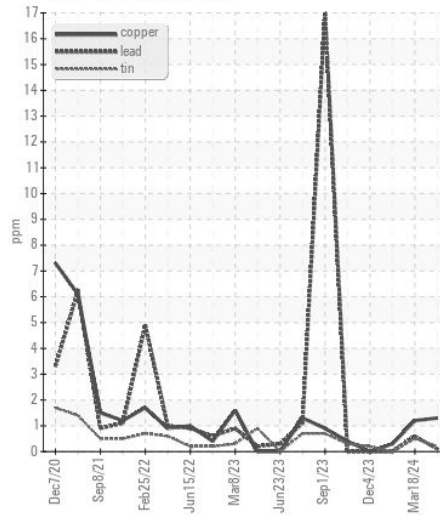

Viscosity @ 100°C

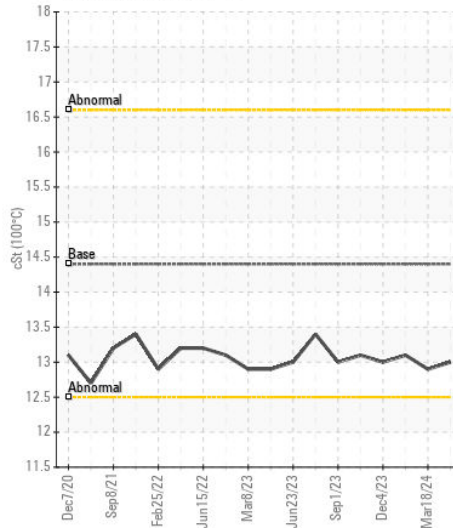

Base Number

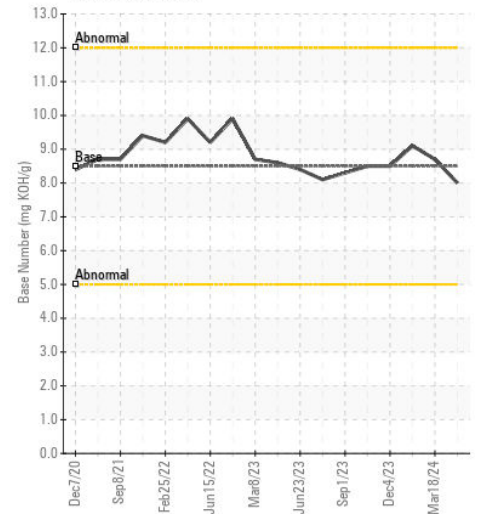

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : MW0071322
Lab Number : 06211355
Unique Number : 11084219
Test Package : MAR 2

Received : 17 Jun 2024
Tested : 19 Jun 2024
Diagnosed : 19 Jun 2024 - Wes Davis

ARTCO - ADM AG SERVICES & OIL SEEDS
 2505 BLUFF ROAD
 MT VERNON, IN
 US 47620
 Contact: JOE FLOYD
 joseph.floyd@adm.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: