



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 325G 1T0325GKJNJ426347

Component
Diesel Engine

Fluid
{not provided} (--- GAL)

RECOMMENDATION

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0207332	---	---
Sample Date		Client Info		10 Jun 2024	---	---
Machine Age	hrs	Client Info		676	---	---
Oil Age	hrs	Client Info		676	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185m	>51	38	---	---
Chromium	ppm	ASTM D5185m	>11	<1	---	---
Nickel	ppm	ASTM D5185m	>5	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m	>3	<1	---	---
Aluminum	ppm	ASTM D5185m	>31	8	---	---
Lead	ppm	ASTM D5185m	>26	<1	---	---
Copper	ppm	ASTM D5185m	>26	71	---	---
Tin	ppm	ASTM D5185m	>4	<1	---	---
Vanadium	ppm	ASTM D5185m		<1	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>22	56	---	---
Potassium	ppm	ASTM D5185m	>20	4	---	---
Fuel	%	ASTM D3524	>2.1	<1.0	---	---
Water		WC Method	>0.21	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	*ASTM D7844	>3	0.6	---	---
Nitration	Abs/cm	*ASTM D7624	>20	10.3	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	27.4	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.21	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185m	>31	15	---	---
Boron	ppm	ASTM D5185m		138	---	---
Barium	ppm	ASTM D5185m		3	---	---
Molybdenum	ppm	ASTM D5185m		236	---	---
Manganese	ppm	ASTM D5185m		2	---	---
Magnesium	ppm	ASTM D5185m		697	---	---
Calcium	ppm	ASTM D5185m		1639	---	---
Phosphorus	ppm	ASTM D5185m		825	---	---
Zinc	ppm	ASTM D5185m		1017	---	---
Sulfur	ppm	ASTM D5185m		3396	---	---
Oxidation	Abs/.1mm	*ASTM D7414	>25	25.8	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		6.9	---	---
Visc @ 100°C	cSt	ASTM D445		12.1	---	---

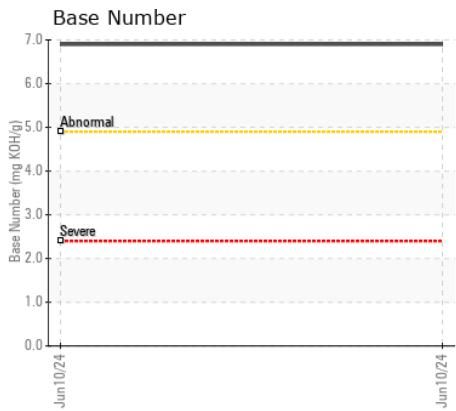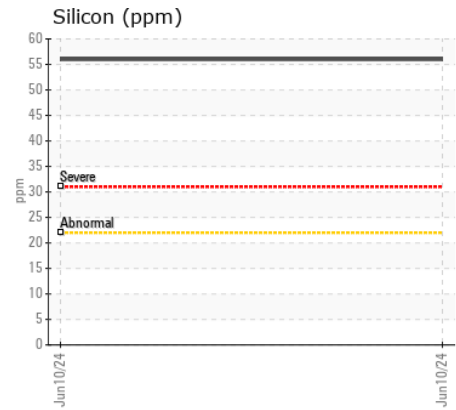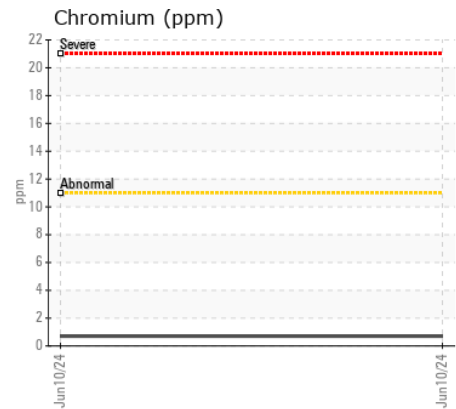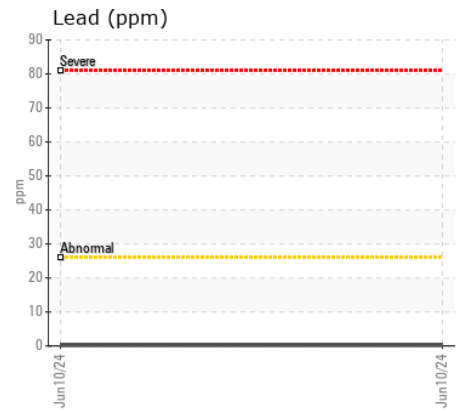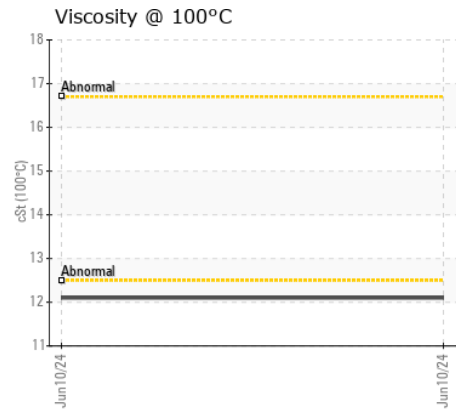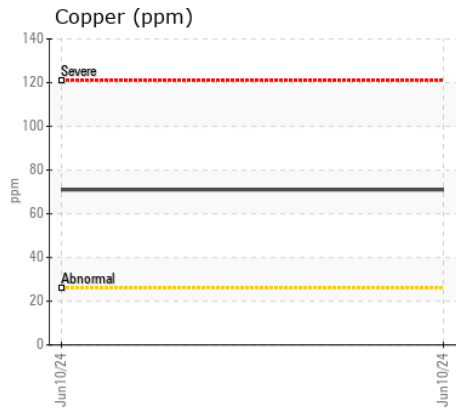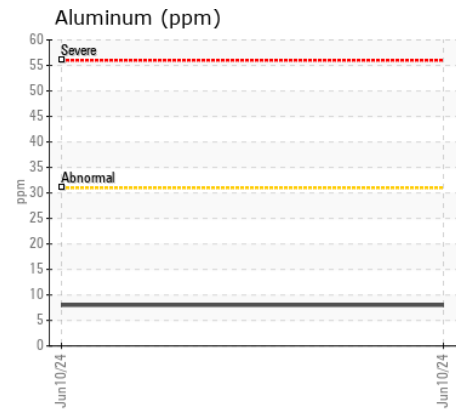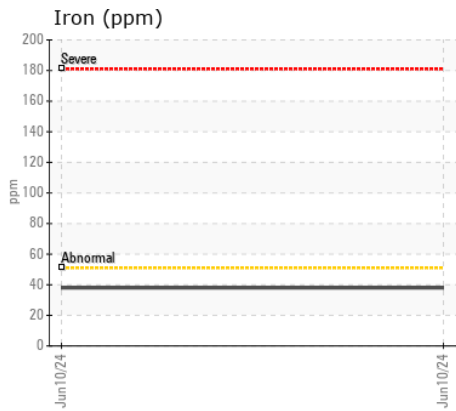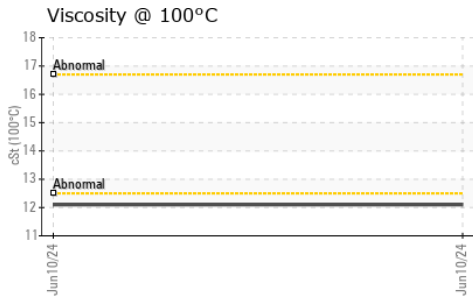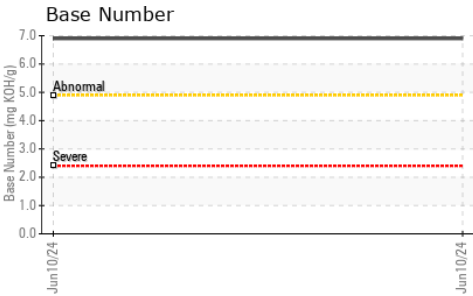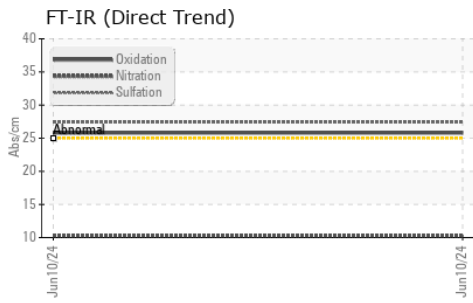

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0207332 **Received** : 17 Jun 2024
Lab Number : 06211426 **Tested** : 19 Jun 2024
Unique Number : 11084290 **Diagnosed** : 19 Jun 2024 - Sean Felton
Test Package : MOBCE (Additional Tests: FuelDilution, PercentFuel, TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

JRE - SALEM
 3902 W. MAIN STREET
 SALEM, VA
 US 24153
 Contact: BUTCH GOAD
 bgoad@jrenet.com
 T:
 F: (540)380-5547