



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
JOHN DEERE 948L 1DW948LBEPF716865
 Component
Hydraulic System
 Fluid
JOHN DEERE HYDRAU (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		JR0211414	JRMC378458	---
Sample Date		Client Info		14 Jun 2024	01 Mar 2024	---
Machine Age	hrs	Client Info		1138	475	---
Oil Age	hrs	Client Info		1138	475	---
Filter Age	hrs	Client Info		1138	475	---
Oil Changed		Client Info		Not Changd	Not Changd	---
Filter Changed		Client Info		Not Changd	Not Changd	---
Sample Status				NORMAL	ABNORMAL	---

WEAR

All component wear rates are normal.

PQ	UOM	Method	Limit/Abn	Current	History1	History2
PQ		ASTM D8184		20	14	---
Iron	ppm	ASTM D5185m	>20	6	<1	---
Chromium	ppm	ASTM D5185m	>10	3	0	---
Nickel	ppm	ASTM D5185m	>10	<1	0	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>10	2	0	---
Lead	ppm	ASTM D5185m	>10	<1	0	---
Copper	ppm	ASTM D5185m	>75	3	4	---
Tin	ppm	ASTM D5185m	>10	<1	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---

CONTAMINATION











The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185m	>20	3	<1	---
Potassium	ppm	ASTM D5185m	>20	3	<1	---
Water		WC Method	>0.1	NEG	NEG	---
Particles >4µm		ASTM D7647	>5000	3021	▲ 10429	---
Particles >6µm		ASTM D7647	>1300	853	▲ 3170	---
Particles >14µm		ASTM D7647	>160	38	● 200	---
Particles >21µm		ASTM D7647	>40	4	33	---
Particles >38µm		ASTM D7647	>10	0	1	---
Particles >71µm		ASTM D7647	>3	0	0	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	19/17/12	▲ 21/19/15	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		2	2	---
Boron	ppm	ASTM D5185m		<1	0	---
Barium	ppm	ASTM D5185m		<1	<1	---
Molybdenum	ppm	ASTM D5185m		<1	0	---
Manganese	ppm	ASTM D5185m		<1	0	---
Magnesium	ppm	ASTM D5185m		14	4	---
Calcium	ppm	ASTM D5185m	87	541	320	---
Phosphorus	ppm	ASTM D5185m	727	700	692	---
Zinc	ppm	ASTM D5185m	900	915	828	---
Sulfur	ppm	ASTM D5185m	1500	1965	1750	---
Acid Number (AN)	mg KOH/g	ASTM D8045	1.0	0.79	0.91	---
Visc @ 40°C	cSt	ASTM D445	65	57.2	59.1	---

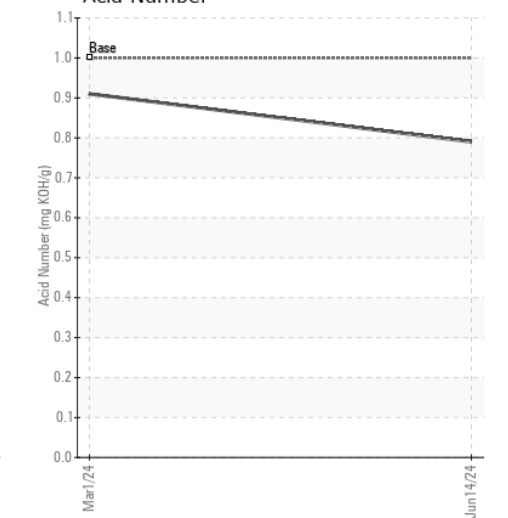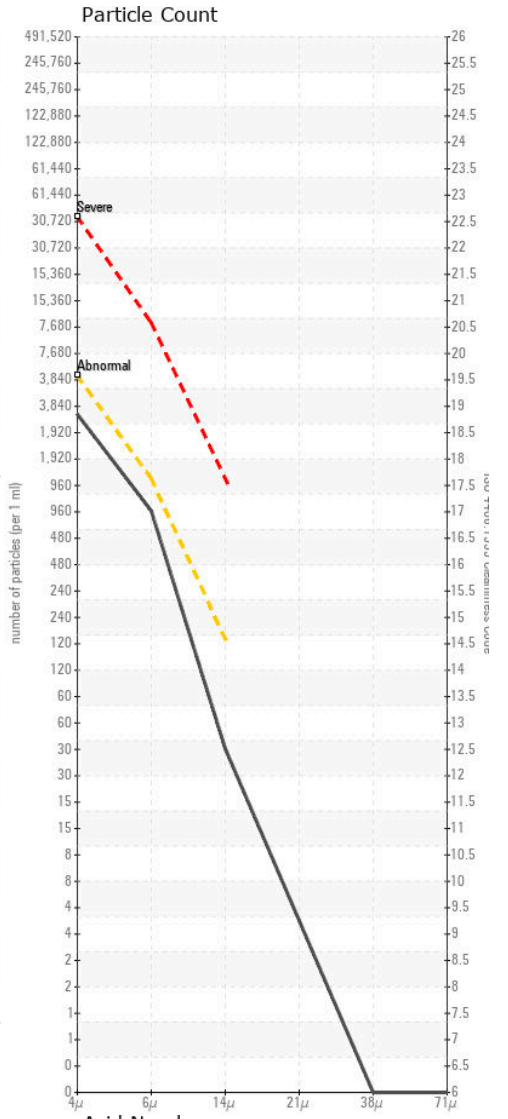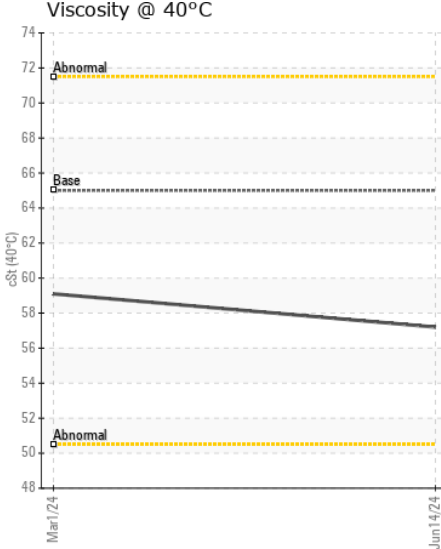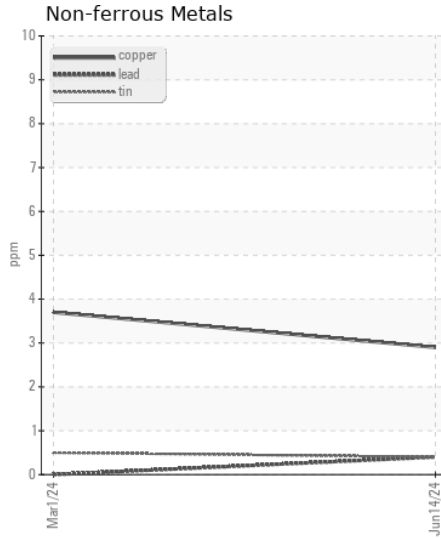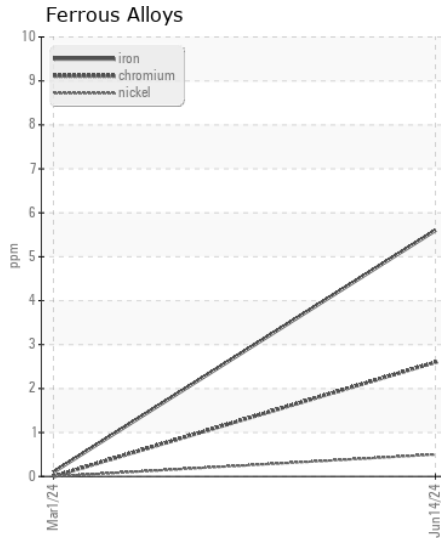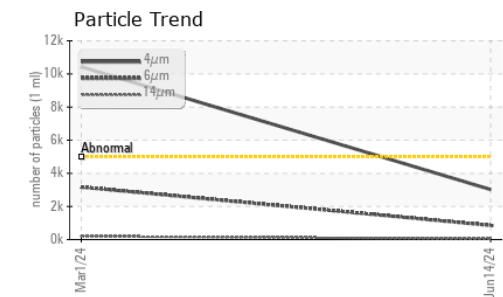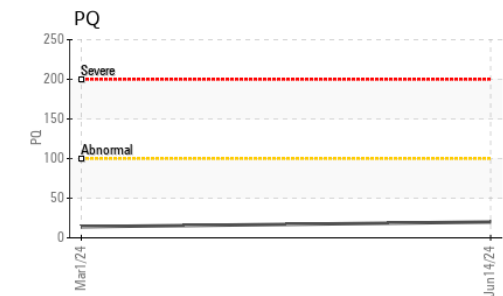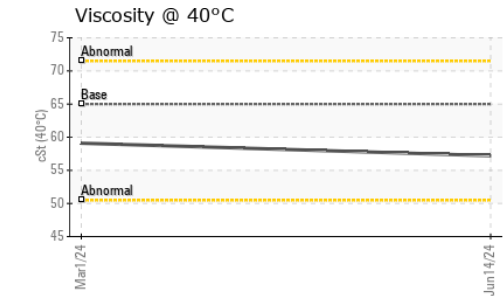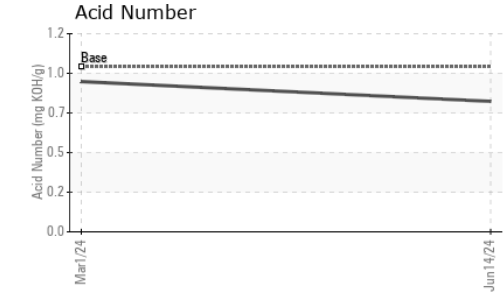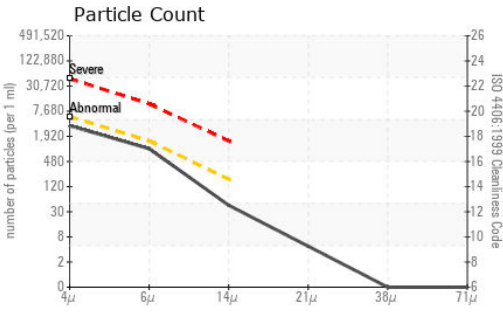

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : JR0211414 **Received** : 17 Jun 2024
Lab Number : 06211498 **Tested** : 18 Jun 2024
Unique Number : 11084362 **Diagnosed** : 18 Jun 2024 - Wes Davis
Test Package : CONST (Additional Tests: PQ)

JRE - ASHLAND
 11047 LEADBETTER RD
 ASHLAND, VA
 US 23005
 Contact: DAVID ZIEG
 dzieg@jamesriverequipment.com
 T: (804)798-6001
 F: (804)798-0292

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)