



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
HIAB 4250839
 Component
Hydraulic System
 Fluid
AW HYDRAULIC OIL ISO 32 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0753705	---	---
Sample Date		Client Info		10 May 2023	---	---
Machine Age	hrs	Client Info		133	---	---
Oil Age	hrs	Client Info		133	---	---
Filter Age	hrs	Client Info		133	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	1	---	---
Chromium	ppm	ASTM D5185m	>10	<1	---	---
Nickel	ppm	ASTM D5185m	>10	<1	---	---
Titanium	ppm	ASTM D5185m		<1	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>10	2	---	---
Lead	ppm	ASTM D5185m	>10	<1	---	---
Copper	ppm	ASTM D5185m	>75	<1	---	---
Tin	ppm	ASTM D5185m	>10	<1	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---

CONTAMINATION











The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185m	>20	1	---	---
Potassium	ppm	ASTM D5185m	>20	<1	---	---
Water		WC Method	>0.1	NEG	---	---
Particles >4µm		ASTM D7647	>5000	1699	---	---
Particles >6µm		ASTM D7647	>1300	247	---	---
Particles >14µm		ASTM D7647	>160	19	---	---
Particles >21µm		ASTM D7647	>40	2	---	---
Particles >38µm		ASTM D7647	>10	0	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	18/15/11	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---	---

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		0	---	---
Boron	ppm	ASTM D5185m	5	0	---	---
Barium	ppm	ASTM D5185m	5	0	---	---
Molybdenum	ppm	ASTM D5185m	5	<1	---	---
Manganese	ppm	ASTM D5185m		<1	---	---
Magnesium	ppm	ASTM D5185m	25	2	---	---
Calcium	ppm	ASTM D5185m	200	46	---	---
Phosphorus	ppm	ASTM D5185m	300	350	---	---
Zinc	ppm	ASTM D5185m	370	455	---	---
Sulfur	ppm	ASTM D5185m	2500	4811	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	0.46	---	---
Visc @ 40°C	cSt	ASTM D445	32	37.2	---	---
Visc @ 100°C	cSt	ASTM D445	5.4	7.1	---	---
Viscosity Index (VI)	Scale	ASTM D2270	102	156	---	---

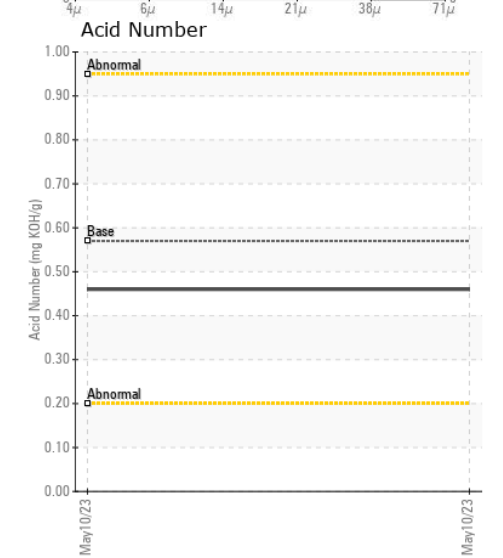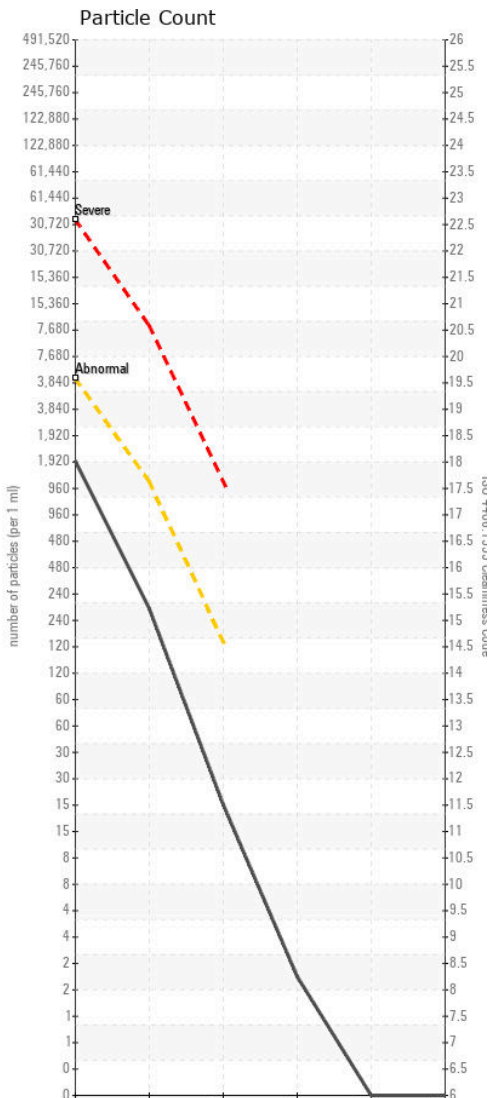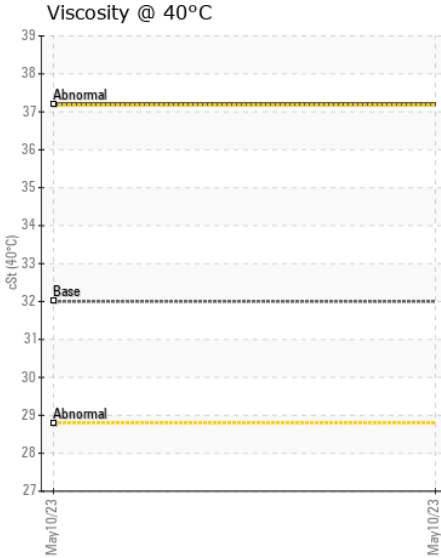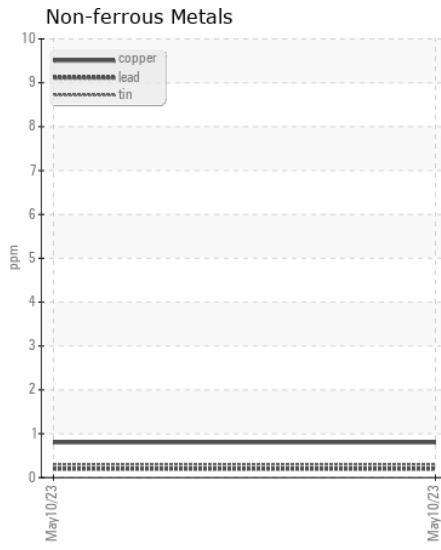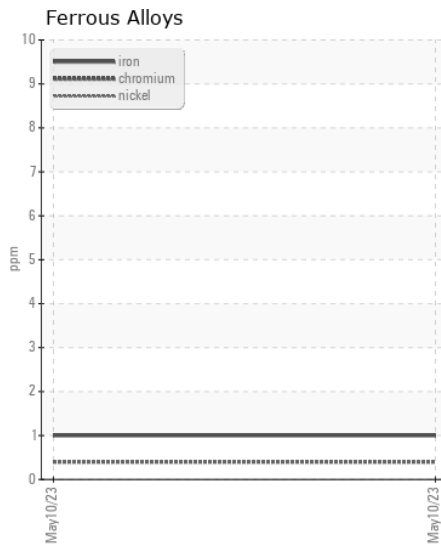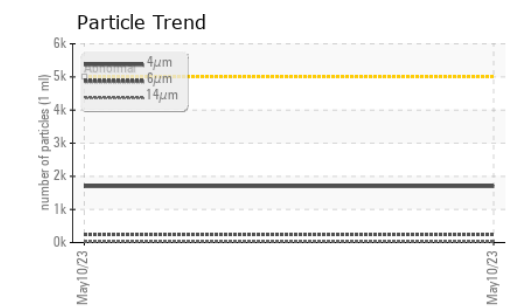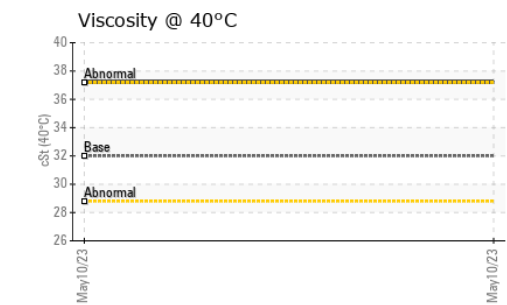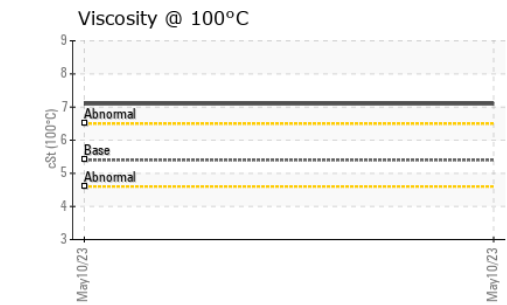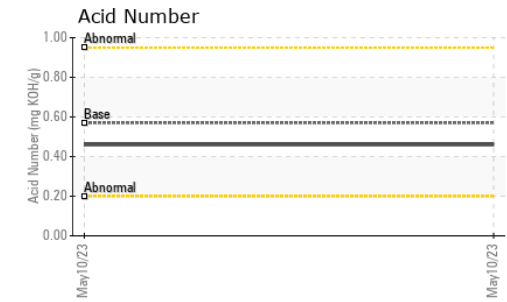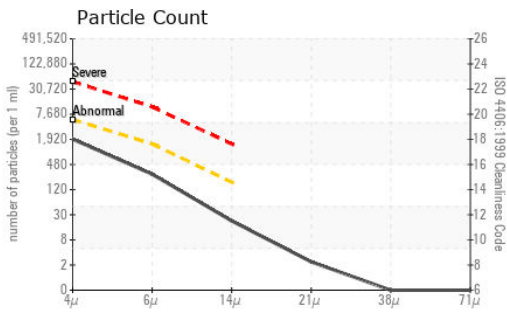

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0753705 **Received** : 17 Jun 2024
Lab Number : 06211550 **Tested** : 18 Jun 2024
Unique Number : 11084414 **Diagnosed** : 18 Jun 2024 - Don Baldrige
Test Package : MOB 2 (Additional Tests: KV100, VI)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

HIAB USA - ST LOUIS
 2367 CASSENS DR
 FENTON, MO
 US 63026

Contact: BRETT HIGGINS
 brett.higgins@hiab.com

T: (636)575-5136
 F: (636)677-5800