



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**56076**  
 Component  
**Hydraulic System**  
 Fluid  
**AW HYDRAULIC OIL ISO 32 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0833583</b>	WC0480854	---
Sample Date		Client Info		<b>02 Aug 2023</b>	16 Aug 2022	---
Machine Age	hrs	Client Info		<b>2000</b>	2000	---
Oil Age	hrs	Client Info		<b>2000</b>	2000	---
Filter Age	hrs	Client Info		<b>2000</b>	2000	---
Oil Changed		Client Info		<b>N/A</b>	N/A	---
Filter Changed		Client Info		<b>N/A</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185m	>20	<b>9</b>	7	---
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	---
Nickel	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m		<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>10	<b>2</b>	0	---
Lead	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	---
Copper	ppm	ASTM D5185m	>75	<b>1</b>	<1	---
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---

## CONTAMINATION











There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Silicon	ppm	ASTM D5185m	>20	<b>2</b>	<1	---
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	0	---
Water		WC Method	>0.1	<b>NEG</b>	NEG	---
Particles >4µm		ASTM D7647	>5000	<b>1233</b>	2855	---
Particles >6µm		ASTM D7647	>1300	<b>161</b>	389	---
Particles >14µm		ASTM D7647	>160	<b>6</b>	28	---
Particles >21µm		ASTM D7647	>40	<b>1</b>	5	---
Particles >38µm		ASTM D7647	>10	<b>0</b>	0	---
Particles >71µm		ASTM D7647	>3	<b>0</b>	0	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	<b>17/15/10</b>	19/16/12	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	NEG	---

## FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185m		<b>0</b>	0	---
Boron	ppm	ASTM D5185m	5	<b>0</b>	0	---
Barium	ppm	ASTM D5185m	5	<b>0</b>	<1	---
Molybdenum	ppm	ASTM D5185m	5	<b>&lt;1</b>	<1	---
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Magnesium	ppm	ASTM D5185m	25	<b>2</b>	0	---
Calcium	ppm	ASTM D5185m	200	<b>50</b>	54	---
Phosphorus	ppm	ASTM D5185m	300	<b>357</b>	349	---
Zinc	ppm	ASTM D5185m	370	<b>436</b>	395	---
Sulfur	ppm	ASTM D5185m	2500	<b>3560</b>	3238	---
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	<b>0.28</b>	0.32	---
Visc @ 40°C	cSt	ASTM D445	32	<b>33.7</b>	27.1	---
Visc @ 100°C	cSt	ASTM D445	5.4	<b>6.7</b>	6.7	---
Viscosity Index (VI)	Scale	ASTM D2270	102	<b>160</b>	220	---

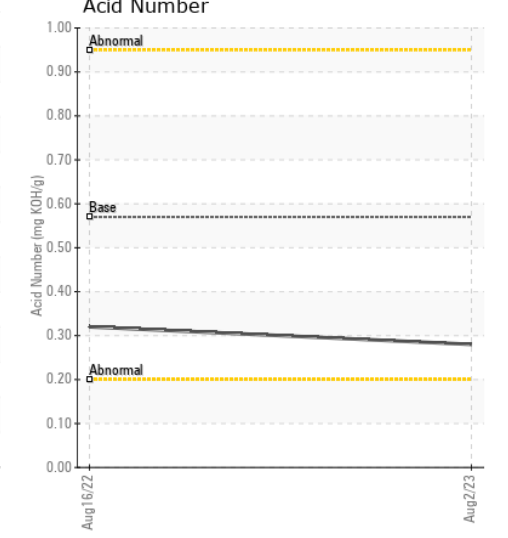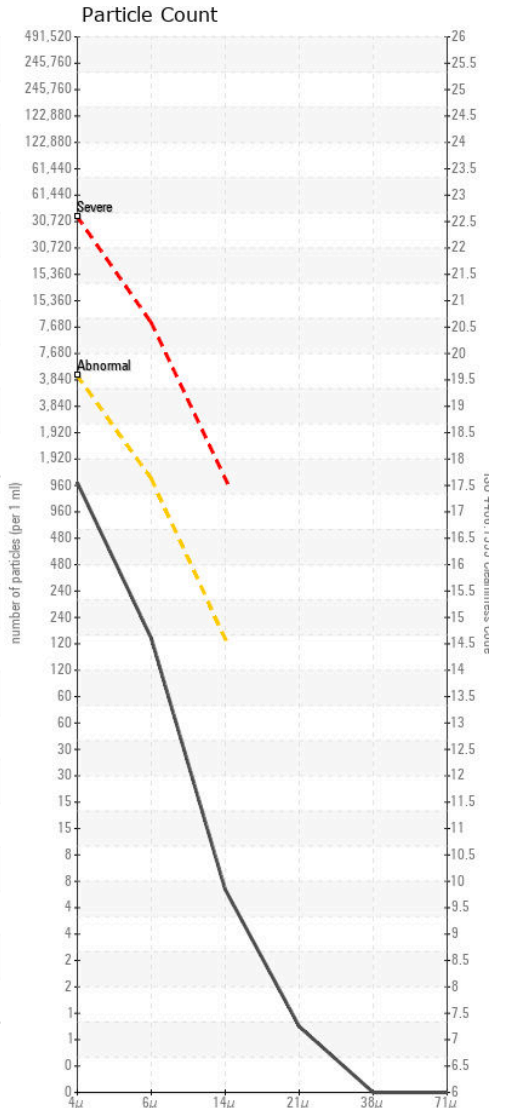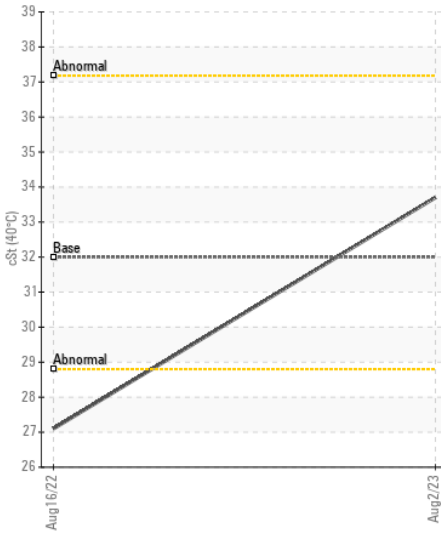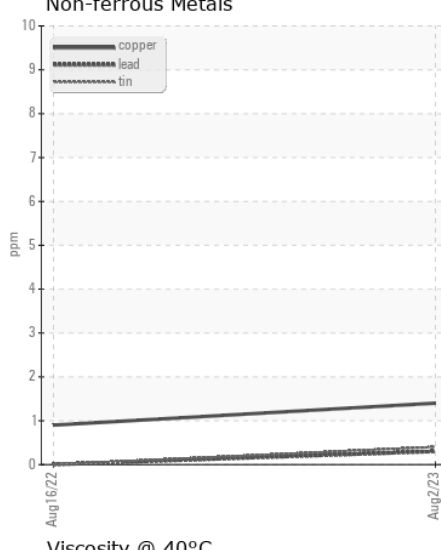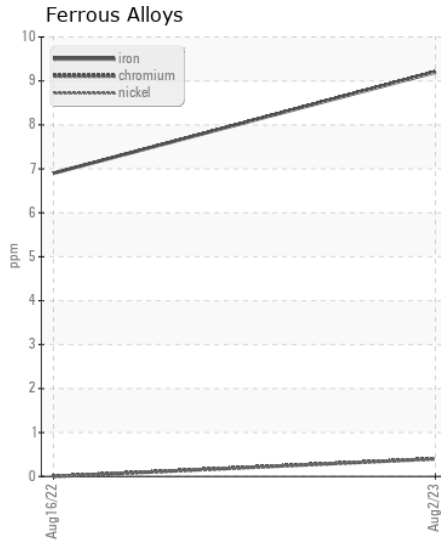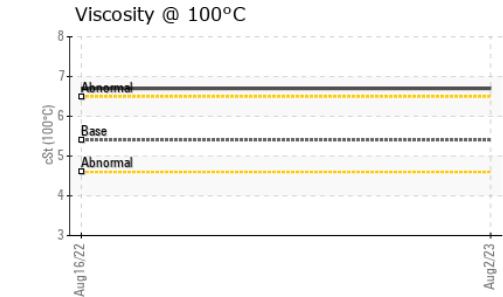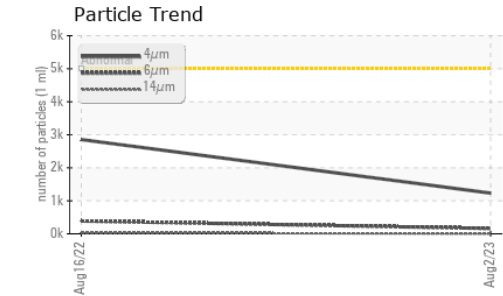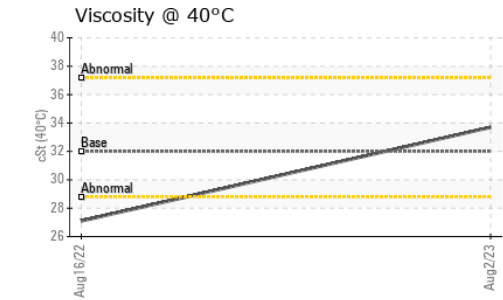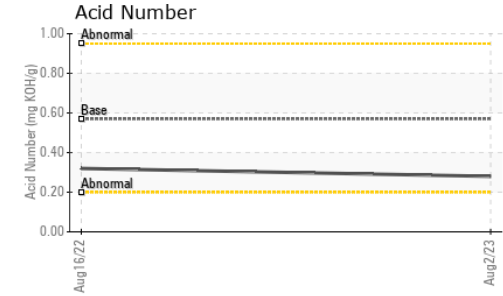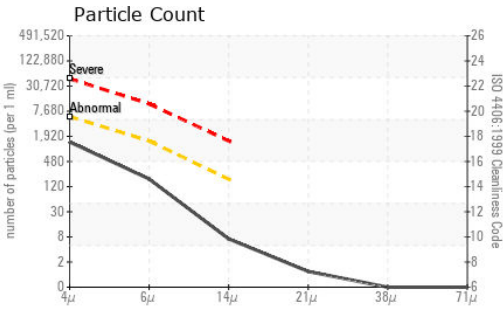

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0833583 **Received** : 17 Jun 2024  
**Lab Number** : 06211552 **Tested** : 18 Jun 2024  
**Unique Number** : 11084416 **Diagnosed** : 18 Jun 2024 - Angela Borella  
**Test Package** : MOB 2 ( Additional Tests: KV100, VI )

**HIAB USA - ST LOUIS**  
 2367 CASSENS DR  
 FENTON, MO  
 US 63026  
 Contact: BRETT HIGGINS  
 brett.higgins@hiab.com  
 T: (636)575-5136  
 F: (636)677-5800

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)