



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
SEAWARD ENDEAVOR

Machine Id
Endeavor
Component
1 Air Compressor

Fluid
{not provided} (--- QTS)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

WEAR

All component wear rates are normal.







CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0907666	---	---
Sample Date		Client Info		13 May 2024	---	---
Machine Age	hrs	Client Info		9232	---	---
Oil Age	hrs	Client Info		9171	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				NORMAL	---	---
Iron	ppm	ASTM D5185m	>50	20	---	---
Chromium	ppm	ASTM D5185m	>4	0	---	---
Nickel	ppm	ASTM D5185m	>4	<1	---	---
Titanium	ppm	ASTM D5185m		0	---	---
Silver	ppm	ASTM D5185m		0	---	---
Aluminum	ppm	ASTM D5185m	>10	<1	---	---
Lead	ppm	ASTM D5185m	>20	0	---	---
Copper	ppm	ASTM D5185m	>40	21	---	---
Tin	ppm	ASTM D5185m	>5	6	---	---
Vanadium	ppm	ASTM D5185m		0	---	---
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Silicon	ppm	ASTM D5185m	>25	2	---	---
Potassium	ppm	ASTM D5185m	>20	2	---	---
Water		WC Method	>0.6	NEG	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.6	NEG	---	---
Sodium	ppm	ASTM D5185m		7	---	---
Boron	ppm	ASTM D5185m		0	---	---
Barium	ppm	ASTM D5185m		0	---	---
Molybdenum	ppm	ASTM D5185m		0	---	---
Manganese	ppm	ASTM D5185m		1	---	---
Magnesium	ppm	ASTM D5185m		6	---	---
Calcium	ppm	ASTM D5185m		950	---	---
Phosphorus	ppm	ASTM D5185m		468	---	---
Zinc	ppm	ASTM D5185m		481	---	---
Sulfur	ppm	ASTM D5185m		11709	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		1.10	---	---
Visc @ 40°C	cSt	ASTM D445		45.7	---	---

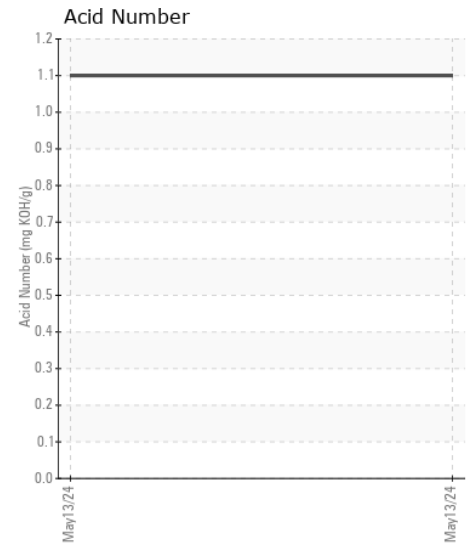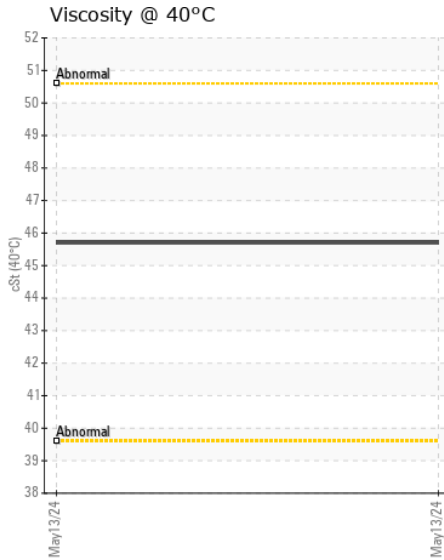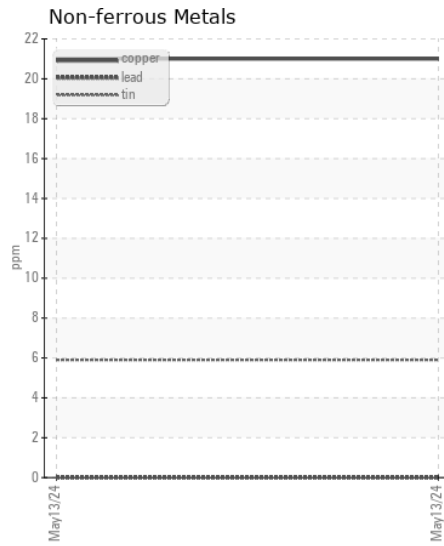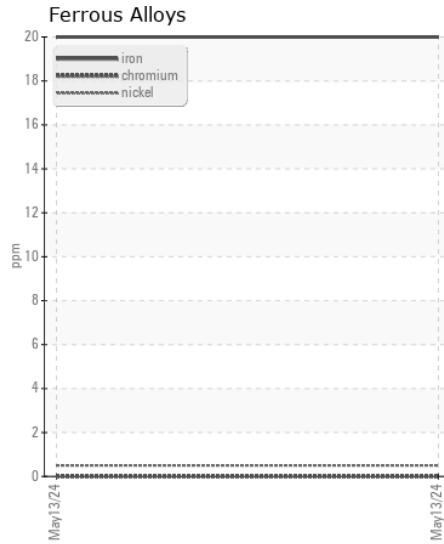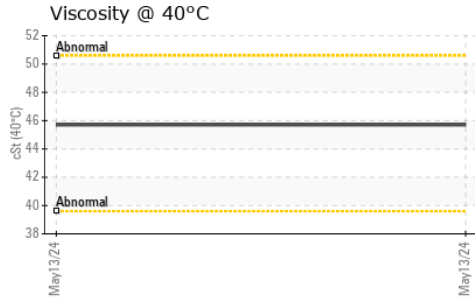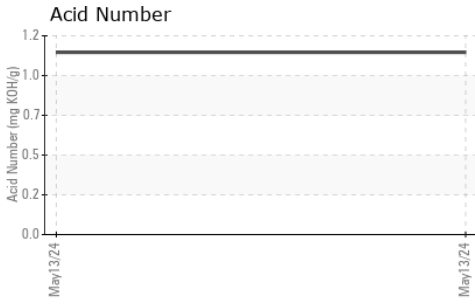

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0907666
Lab Number : 06211900
Unique Number : 11084764
Test Package : MAR 2

Received : 17 Jun 2024
Tested : 18 Jun 2024
Diagnosed : 19 Jun 2024 - Don Baldrige

SEAWARD SERVICES
 222 PEARL ST
 NEW ALBANY, IN
 US 47150

Contact: PETER CHARBONNET
 PCHARBONNET@HMS-SEAWARD.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
 F: